




Core Pins

COMPONENT GUYS INC.

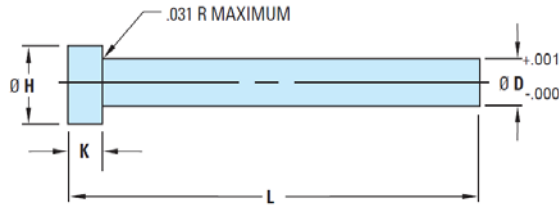

Material: H-13 / 1.2344 / SKD61

D	Cat. No. (Standard Hardness)	Cat. No. (High Hardness)	L				H	K
			M03	M06	M10	M14		
3/32	C07	CX07	M03	M06	M10		1/4	1/8
7/64	C08	CX08	M03	M06	M10		1/4	1/8
1/8	C09	CX09	M03	M06	M10	M14	1/4	1/8
9/64	C10	CX10	M03	M06	M10	M14	1/4	1/8
5/32	C11	CX11	M03	M06	M10	M14	9/32	5/32
11/64	C12	CX12	M03	M06	M10	M14	11/32	3/16
3/16	C13	CX13	M03	M06	M10	M14	3/8	3/16
13/64	C14	CX14	M03	M06	M10	M14	3/8	3/16
7/32	C15	CX15	M03	M06	M10	M14	13/32	3/16
1/4	C17	CX17	M03	M06	M10	M14	7/16	3/16
9/32	C19	CX19	M03	M06	M10	M14	7/16	1/4
5/16	C21	CX21	M03	M06	M10	M14	1/2	1/4
11/32	C23	CX23	M03	M06	M10	M14	9/16	1/4
3/8	C25	CX25	M03	M06	M10	M14	5/8	1/4
13/32	C27	CX27	M03	M06	M10	M14	11/16	1/4
7/16	C29	CX29	M03	M06	M10	M14	11/16	1/4
15/32	C31	CX31	M03	M06	M10	M14	3/4	1/4
1/2	C33	CX33	M03	M06	M10	M14	3/4	1/4
9/16	C35	CX35		M06	M10	M14	13/16	1/4
5/8	C37	CX37		M06	M10	M14	7/8	1/4
3/4	C41	CX41		M06	M10	M14	1	1/4
7/8	C45	CX45		M06	M10	M14	1-1/8	1/4
1"	C47	CX47		M06	M10	M14	1-1/4	1/4

Precision made of superior quality hotwork die steel
Standard hardness 30-35 Hrc
High hardness - 50-55Hrc

uniform grain , higher tensile strength, then annealed to permit easier machining and stamping

Pin body and head are finish ground

Combine Item Number Prefix and the length (L dimension) desired to order

