

U860BDA

Application Specifications

Recommended Longitudinals	7" Channel
Recommended Crossmembers	4" Channel
Hoist:	
NTEA Class	60
Application	84" - 102" CA
Subframe	1/4" Steel Channel
Pivot Hinge	Heavy Duty Cast Steel
Mounting Height	15"
Standard Pivot	12"
Standard Dump Angle	50 degrees
Shipping Weight*	1212 lbs.
Oil Reservoir Capacity	8.5 gallons

Cylinder:

Bore	8.00"
Stroke	26"
Piston Rod Diameter	2.75"

*Includes all mounting equipment



This hoist is easily installed on the trucks chassis using extra heavy duty 4140 grade cast mounting brackets, grade 8 bolts and minimal welding. Installation is quick and easy.



Shown are the U860BDA heavy duty cast lift arms. These arms easily attach directly to the body using 4140 grade, 1 1/2" hinge pins which are bolted in place with grade 8 bolts.


Available Components



The G102D pump/valve combination direct mount gear pump does not require a drive line thus making it safer and more dependable. This pump has an S.A.E. "B" 2-bolt flange. 15 GPM @1200 RPM Available with "ccw" or "cc" rotation



The 8.5 gallon box type reservoir is designed to be frame mounted. It hangs out of the way and is equipped with a brass wire mesh suction strainer, oil level & temperature gauge.

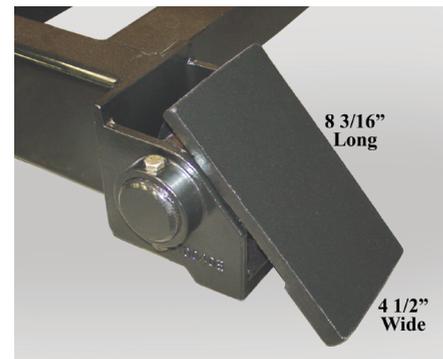

These hinges are cast from extra heavy duty 4140 grade steel to ensure durability. This style hinge is used on a formed crossmemberless understructure.

Galion-Godwin reserves the right under its Product Improvement Program to modify construction and/or design and furnish equipment when so altered without reference to illustration and/or specifications shown herein. All specifications subject to change without notice.

Galion-Godwin Truck Body Co. LLC.
7415 Peabody-Kent Rd. Winesburg OH. P.O. Box 208
(877) 450- 4794 Fax (330) 359-5660