



DS SERIES

MEDIUM DUTY RAIL GATE

1,600 lb.– 3,000 lb. Capacities

**Level Ride Offers Better
Load Stability Versus
Tuckaway Design.**



Products shown may feature optional equipment.
Content subject to change without notice.



STANDARD DS SERIES ADVANTAGES INCLUDE:

- Applications - straight trucks, cube or cutaway vans, step vans, dual wheel service bodies and trailers
- Level ride lift - maximum load stability, with straight vertical platform movement
- Large folding platform stows at bed height for uninhibited rear door access and dock loading
- Simple and easy operation when opening and closing the platform (torsion bar assist)
- Easy cargo loading with standard 12" ramp
- Above floor lift feature with a maximum above floor travel of 11"
- UHMW - Slide pads on runners

OTHER STANDARD FEATURES:

- Power unit installed, tested and enclosed in weather protected housing
- Platform folds in half on all standard models
- Anti-skid treadplate platform and ramp for better grip
- Built-in toe deflector
- Pressure compensated flow control valve controls platform descent regardless of load weight
- Weather sealed electric controls
- Charge line circuit protection
- Meets TMC specifications
- Powder coat finish on key liftgate components produces a high-quality finish that is exceptionally resistant to corrosion and abrasion


Provides the convenience of a folding platform that stores at bed height.



WALTCO

DS SERIES

MEDIUM DUTY RAIL GATE

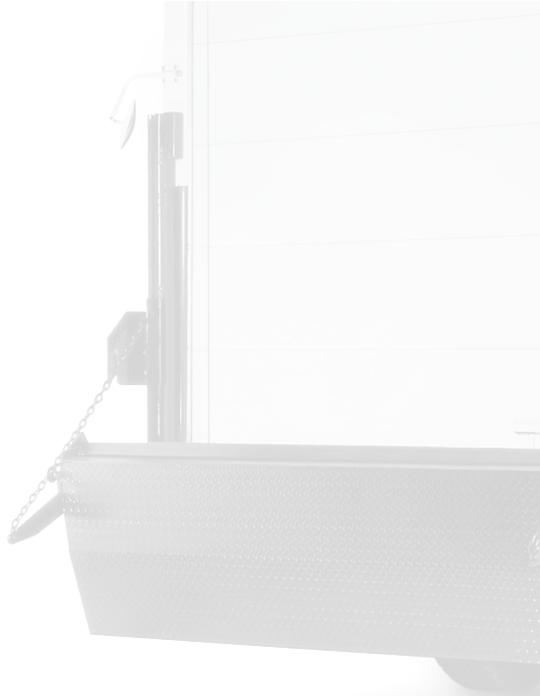

SPECIFICATIONS

Bed Ht: 38"- 57"

MODEL	CAPACITY	PLATFORM	RAMP
DS-16	1,600 lbs.	36" x 89"	12"
DS-20	2,000 lbs	36" x 89"	12"
DS-20	2,000 lbs	42" x 88"	12"
DS-30	3,000 lbs	42" x 88"	12"
AP (Aluminum Platform)			
DS/AP-16	1,600 lbs.	36" x 89"	12"
DS/AP-20	2,000 lbs	36" x 89"	12"
DS/AP-20	2,000 lbs	42" x 88"	12"
DS/AP-30	3,000 lbs	42" x 88"	12"

Note: Above floor models are available with a maximum above floor travel of 11"; All platforms break evenly

OPTIONAL EQUIPMENT:

- Platform Material:
 - Aluminum
- Oversized Ramp in aluminum or steel:
 - Fixed
 - Hinged
 - with Cart Stop
- Deeper, narrower or wider platforms
- Above floor lift (standard on all AF models) lifts the platform with a maximum above floor travel of 11"
- Remote hand held toggle switch control with 15 ft. coil cord
- Hydraulic platform closing - decreases platform and rail width
 - Discuss with factory prior to ordering

WALTCO

T: 800.211.3074
F: 800.211.3075
Email: sales@waltco.com
Web: www.waltcoliftgates.com

Waltco Lift Corp.
Corporate Office United States
285 Northeast Ave.
Tallmadge, OH 44278
P: 330.633.9191
F: 330.633.1418

Waltco Lift Corp.
United States
620 S Hambledon Ave.
City of Industry, CA 91744
P: 626.964.0990
F: 626.964.0149

Waltco Lift Inc.
Canada
90 North Queen St.
Etobicoke, ON M8Z 2C5