

ILR ROUTE PRO

2000 | 2500 | 3000 lbs. Capacity

PALFINGER

LIFETIME EXCELLENCE

**FITTING A WIDE RANGE OF TRUCKS WITH
FLOOR HEIGHTS FROM 36 TO 53 INCHES**



OPTIMIZED CONSTRUCTION

- » Bushings & zerks at all pivot points
- » Oversized quality components
- » Heat treated pins
- » 150 AMP circuit breaker
- » Nylon roller for easy opening
- » Thermo protected PowerPack pre-installed, wired and filled with premium multi-temp hydraulic fluid

STANDARD | SAFETY FEATURES

- » Single cylinder with hydraulic lock on cylinder port
- » Cab shut off switch
- » Dual torsion system for assisted folding on 48" platform
- » Flush mounted hinges for pallet and cart-friendly operation

LIFTGATE OPTIONS

- » 102" Bed extensions
- » Carts stops
- » Rubber pads, 16" & 24"
- » Mechanical power down assist
- » Rear impact guards
- » Hand held remote
- » H/D dock bumpers, single or dual steps depending on bed heights
- » Dual controls
- » 7,000 lbs receiver tube
- » Wireless remote
- » Auxiliary battery kit
- » Remote pump kit
- » DOT under ride
- » Galvanizing

CONFIGURATIONS



Mount frame clearance:

Min. 26" - Max 36"

Bed Height Range:

36" laden - 53" unladen

(48" long platform - min. 38" laden)

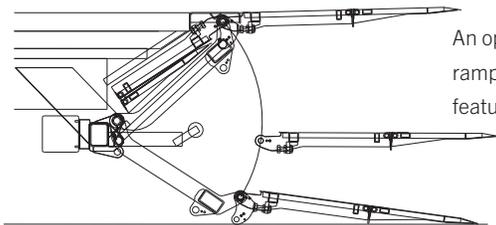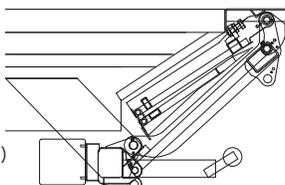

An optimized one cylinder raming ride unit with many features.

Model	Lifting Capacity (lbs.)	Platform Length (Inches)	Platform Width (Inches)	Bed Height (Inches)	Approx. Weight (lbs.)	Mount Clearance (Inches)
ILR 20	2000	42, 48	80	36 - 53	750	25 - 36
ILR 25	2500	42, 48	80	36 - 53	750	25 - 36
ILR 30	3000	42, 48	80	36 - 53	765	25 - 36

HIGHLIGHTS

The ILR fits a wide range of trucks with floor heights from 36 to 53 inches. The two standard oversized platforms offer increased productivity at an efficient price level. Platform sizes up to a length of 48 inches (44" flat plus 4" combo wedge with 10 degree incline) offers an optimum solution with decreased platform angle, more space in front of cart stops and easy access on and off the platform.

COMPONENTS

PALFINGER liftgates are built with oversized components for greater reliability. Our standard hydraulic cylinder lock provides more stability, better user control, and improved safety.



POWERPACK

The pre-mounted, pre-filled with premium multi temp hydraulic fluid PowerPack is wired and fully enclosed in a H/D powder coated steel enclosure for fast installation, protection and easy inspection.



CYLINDER MID ARM DESIGN

The one cylinder mid arm design provides great stability vs assembly weight ratio. The platform rotates on an adjustable roller for different bed heights.

