

ILT-WR TWIN FOLD

3500 | 4000 lbs. Capacity



LIFETIME EXCELLENCE

62" x 86" HEAVY DUTY & LEVEL RIDE FOLDING LIFTGATE DESIGNED FOR WALK RAMP DUAL PURPOSE APPLICATION



OPTIMIZED CONSTRUCTION

- » Bushings and zerks at all pivot points
- » High quality components
- » Heat treated pins
- » Fixed 3 piece heavy duty rear impact guard
- » Thermo protected PowerPack pre-installed, wired and filled with premium multi-temp hydraulic fluid
- » 150 AMP circuit breaker
- » Flush mounted hinges for pallet and cart friendly operation
- » Wide lift arm provides added stability


STANDARD | SAFETY FEATURES

- » Level ride platform with heavy duty ground rollers
- » Easy operation
 - Clampable, adjustable roller for folding assistance.
 - Ease of operation provided by torsion springs and standard platform tip assist.
 - Marine grade molded toggle switch operation.
- » 2 cylinder stability
- » Cab shut off switch
- » Hydraulic cylinder locks on cylinder ports

LIFTGATE OPTIONS

- » Power Down
- » Hand held remote
- » Auxiliary truck and trailer kits
- » Dock bumpers
- » Rubber pads, 16" & 24"
- » Cart stops
- » DOT rear impact guard
- » Galvanizing

CONFIGURATIONS

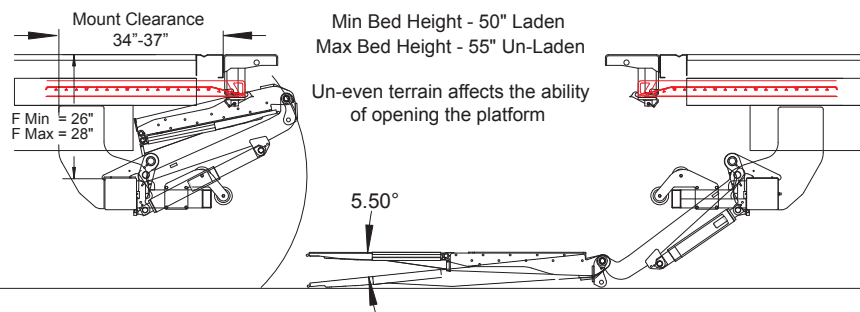

Model	Lifting Capacity (lbs.)	Platform Length (Inches)	Platform Width (Inches)	Bed Height (Inches)	Approx. Weight (lbs.)	Mount Clearance (Inches)
ILT-WR 35	3500	62	86	50 - 55	1080	34 - 37
ILT-WR 40	4000	62	86	50 - 55	1080	34 - 37

*50" Min floor height is based upon a laden truck on flat ground with a 4" rear sill without insulation below the X-member




HIGHLIGHTS

- » The PALFINGER ILT series incorporates the well protected, pre-mounted power pack and heavy duty mount from our larger series of gates with the simplicity of a Two Cylinder mechanical leveling operation.
- » PALFINGER liftgates are built with oversized components for great reliability. Standard hydraulic cylinder locks provide added stability, better user control, and improved operator safety.
- » The platform rotates on a clamped adjustable roller for fast installations to adapt for easier operation on different bed heights.

POWERPACK

The thermo protected PowerPack is fully enclosed in the mount tube for fast installations and slides out for easy inspection. By using oversized and thermo protected quality components, maintenance and down-time is minimized.



TOGGLE SWITCH

The molded toggle switch with standard cab shut-off switch provides a simple and user friendly operation.

