



American Lead and Solder Supply Co.

7056 Archibald St #102-434 - Eastvale, CA 92880

Phone 951-356-4180 Toll-Free 888-462-8258 Fax 951-356-4179

Website: www.alassco.com Email: lengutmansales@gmail.com

Roofing Lead Products

Sheet Lead

Available Direct from the mill.

1 lb, 2 lb, 2.5 lb, 3 lb, 4 lb, 6 lb, 8 lb up to 120 lb per sqft.

Full Rolls

12", 18", 24", 30", 36", 48" up to 96"W x 20' or 25'L

Cut Pieces

12" x12", 18"x18", 24"x24", 30"x30", 36"x36", 48"x48", 48"x84" & 49"x84"

Special sizes are available on special request.

\$300.00 minimum applies.



Strip Lead

An ideal form of [sheet lead](#) for building, industrial, water proofing, and flashing applications and come in 50 lb. rolls for ease of handling. Our strip lead is also available in large coils.

Standard widths in 50 lb. rolls

6", 8", 10", 12", 14", 16", and 18". Other sizes and thicknesses are available upon request



Thickness Fractions	Decimal Equivalent	mm Equivalent	Pounds per Square Foot*
* Approximately			
1/64"	.0156"	0.3969mm	1#
1/32"	.0313"	0.795mm	2#
1/24"	.042"	1.067mm	2 1/2#
3/64"	.047"	1.193mm	3#
1/16"	.0625"	1.5875mm	4#
5/64"	.078"	1.9812mm	5#
3/32"	.094"	2.3876mm	6#
1/8"	.1250"	3.1750mm	8#
5/32"	.1562"	3.9675mm	10#
3/16"	.1875"	4.7625mm	12#
1/4"	.2500"	6.3500mm	16#
3/8"	.3750"	9.5250mm	24#
1/2"	.50"	12.7000mm	30#
3/4"	.75"	19.0500mm	46#
1"	1.00"	25.4000mm	60#
1-1/2"	1.50"	38.1000mm	90#
2"	2.00"	50.8000mm	120#

Multi-Pitch, Flat and Pre-Pitched Lead Roof Flashings

Are made from the highest quality and longest life materials and are ideal for all types of roofing materials. This lead flashing is manufactured to fit any roof pitch, from flat to 3/12 pitch. All sizes will fit any steel, standard or extra heavy soil pipe.

All flashings are made to meet any architectural or Government Specifications. To order Special Flashing's, specify weight of lead, size of flange or base, height of boot and pitch of roof.

All Flashings are available in standard weight Lead 2.5, 3 & 4 lb. per sq. ft. 6 lb. & up available on request.

Flashing Pitch Conversion Chart

Pitch Degree

1/12 = 4 1/2

2/12 = 9 1/2

3/12 = 14

4/12 = 18 1/2

5/12 = 22 1/2

6/12 = 26 1/2

7/12 = 30 1/4

8/12 = 33 1/2

9/12 = 36 1/2

10/12 = 39 1/2

11/12 = 42 1/2

12/12 = 45

13/12 = 47

14/12 = 49


15/12 = 51

16/12 = 53

17/12 = 54 1/2

18/12 = 56

12/17 = 35 1/4

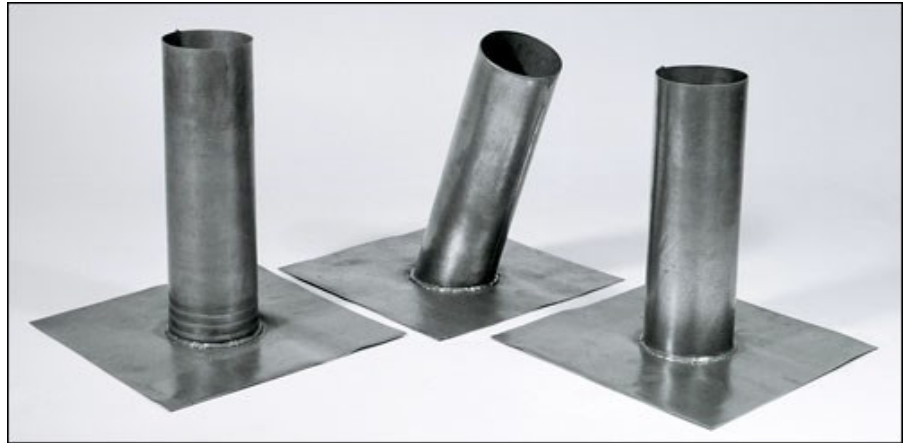

MayCoat™ Protective coating:

the unique chemical properties of the Maycoat™ polymer-based compound provide unsurpassed UV corrosion protection when installed outdoors or exposed to sunlight and other UV producing environments. This means an extra layer of protection for long-term exposed installations. Unlike traditional PVC coated components and other coatings, tapes, paints,

etc., **MayCoat™** utilizes proven state of the art thermoplastic coating technologies.



Lead Flashing Repair Caps

Also known as “repair caps” or “counter flashings” are designed to fit on top of existing lead boots or vent pipes. Available in 1-1/2”, 2”, 3” and 4” and approximately 6” high. Packed 6 per box.

