



# American Lead and Solder Supply Co.

7056 Archibald St #102-434 - Eastvale, CA 92880

Phone 951-356-4180 Toll-Free 888-462-8258 Fax 951-356-4179

Website: [www.alasco.com](http://www.alasco.com) Email: [lengutmansales@gmail.com](mailto:lengutmansales@gmail.com)

## Roofing Lead Products

### Sheet Lead

Available Direct from the mill.

1 lb, 2 lb, 2.5 lb, 3 lb, 4 lb, 6 lb, 8 lb up to 120 lb per sqft.

#### Full Rolls

12", 18", 24", 30", 36", 48" up to 96"W x 20' or 25'L

#### Cut Pieces

12" x 12", 18" x 18", 24" x 24", 30" x 30", 36" x 36", 48" x 48", 48" x 84" & 49" x 84"

Special sizes are available on special request.

\$300.00 minimum applies.



### Strip Lead


An ideal form of [sheet lead](#) for building, industrial, water proofing, and flashing applications and come in 50 lb. rolls for ease of handling. Our strip lead is also available in large coils.

#### **Standard widths in 50 lb. rolls**

6", 8", 10", 12", 14", 16", and 18". Other sizes and thicknesses are available upon request



Thickness Fractions	Decimal Equivalent	mm Equivalent	Pounds per Square Foot*
* Approximately			
1/64"	.0156"	0.3969mm	1#
1/32"	.0313"	0.795mm	2#
1/24"	.042"	1.067mm	2 1/2#
3/64"	.047"	1.193mm	3#
1/16"	.0625"	1.5875mm	4#
5/64"	.078"	1.9812mm	5#
3/32"	.094"	2.3876mm	6#
1/8"	.1250"	3.1750mm	8#
5/32"	.1562"	3.9675mm	10#
3/16"	.1875"	4.7625mm	12#
1/4"	.2500"	6.3500mm	16#
3/8"	.3750"	9.5250mm	24#
1/2"	.50"	12.7000mm	30#
3/4"	.75"	19.0500mm	46#
1"	1.00"	25.4000mm	60#
1-1/2"	1.50"	38.1000mm	90#
2"	2.00"	50.8000mm	120#

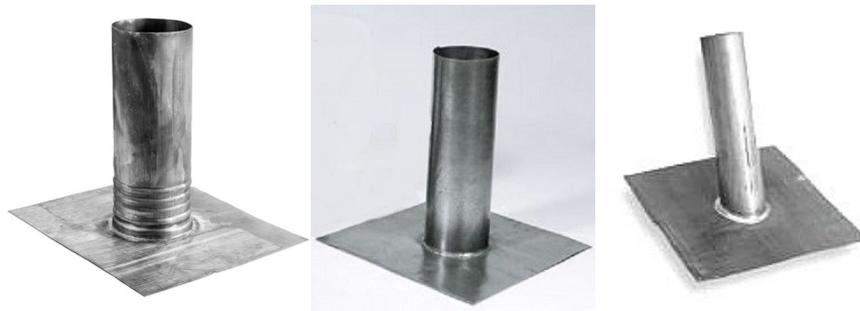

## Multi-Pitch, Flat and Pre-Pitched Lead Roof Flashings

Are made from the highest quality and longest life materials and are ideal for all types of roofing materials. This lead flashing is manufactured to fit any roof pitch, from flat to 3/12 pitch. All sizes will fit any steel, standard or extra heavy soil pipe.

All flashings are made to meet any architectural or Government Specifications. To order Special Flashing's, specify weight of lead, size of flange or base, height of boot and pitch of roof.

All Flashings are available in standard weight Lead 2.5, 3 & 4 lb. per sq. ft. 6 lb. & up available on request.

### Roof Pitch Angle and pitch degree for Pre-Pitched Flashings

Roof Pitch Angle	Roof Pitch Degree
1/12	4 1/2
2/12	9 1/2
3/12	14
4/12	18 1/2
5/12	22 1/2
6/12	26 1/2
7/12	30 1/4
8/12	33 1/2
9/12	36 1/2
10/12	39 1/2
11/12	42 1/2
12/12	45
13/12	47
14/12	49
15/12	51
16/12	53
17/12	54 1/2
18/12	56
12/17	35 1/4

## Lead Flashing Repair Caps

Also known as “repair caps” or “counter flashings” are designed to fit on top of existing lead boots or vent pipes. Available in 1-1/2”, 2”, 3” and 4” and approximately 6” high. Packed 6 per box.



## BUR FlashWrap™ for Square and Round Penetrations



### **BUR FlashWrap™ for Square Penetrations**

#### **FlashCo Standard Sizes**

- 2" x 2" Split Flashing
- 4" x 4" Split Flashing
- 6" x 6" Split Flashing

#### **Save Time**

- Use on wide range of equipment on the roof.
- More aesthetically pleasing appearance.
- No equipment must be moved or service disrupted during installation.

#### **Materials**

- Lead (4 pound)
- Copper (16 ounce)
- Zinc (24 gauge)

Custom sizes available.

### **BUR FlashWrap™ for Round Penetrations**

#### **FlashCo Standard Sizes**

- Up to 1" Split Flashing
- 1" to 2" Split Flashing
- 2" to 3" Split Flashing
- 3" to 4" Split Flashing
- 4" to 5" Split Flashing
- 5" to 6" Split Flashing
- Based on standard pipe sizes

#### **Materials**

- Lead (4 pound)
- Copper (16 ounce)
- Zinc (24 gauge)

Custom sizes available.