



# SM-5500

PC Base System Scale Printer



PC Based

7" Customer Display

*SM-5500 Bench  
7" Operator Display*

### Standard Features

- User Friendly/Eye Catching 7" Color Display
- Remote Diagnostic Functions
- Easy Front Loading Cassette
- Audit Trail
- Date and Time Stamp
- Price Override Lock
- Password Protection
- Remote Update of Operating System, Label Formats, Preset Keys, Images
- Compatible with Third Party Scale Management Applications

### Mandatory Regulations

- USDA Safe Handling Statement
- Cool (Country of Origin) Information
- Ingredients, Nutritional Information, Allergens, Trans Fats

### Advertising Features

- Up Sell
- Cross Sell
- Cooking Instructions
- Advertisement/Multimedia
- Recipes
- Promotions

### Optional Features

LinerLess Labels Scale with World's First Auto-Cutter  
Wireless Lan IEEE 802.11 a/b/g/n, e.Labels, Info Tags, TVP-1500, Speed ID

*Searching for  
a New Balance*

# PC Based System Scale Printer



PC Based

*SM-5500 Bench  
12.1" Operator Display*



*SM-5500 Post  
7" Customer Display*



*SM-5500 P-Plus  
12.1" Customer Display*

PC Based



*SM-5500 P-Plus  
12.1" Operator Display*

## Add-On

### TVP-1500 Queue System

The Queue system will help to provide serene and stress-free waiting. Ticket controlled Queue system allows the customer to take a sequentially numbered ticket, letting both the server and customer know waiting and serve order. This allows for effectively reducing walk-away and increasing sales.



### Electronic Labels Model: e.Label

#### Electronic Labels Model: e.Label



#### e.Label Specifications

Dimensions (in)	3.31(L) x 2.32(W) x .71(H)
Display Size	2.7" ePaper
LCD Display Resolution (Pixels)	264 x 176
Operating Temperature	0 C to 40 C
IP Rating	IP67
Battery Life	5 Years
Power Source (Battery)	3.0V X 3pcs (Not Serviceable)
Net Weight	73g

#### Description

Electronic price label that displays product information and wirelessly connects with PC scale system. Labels can be simultaneously updated with PC scales from the office. Hi-Touch function enables fast and easy PLU retrieval by acting as a remote preset key, eliminating PLU memorization.



#### e.Label Options

- e.Label Stand
- Base Station (Required for e.Label)

### Info Tags

#### Info Tags

E-paper display provides high contrast and low reflection to ensure high screen readability for greater communication possibilities with your customers. Our electronic tags are low energy consuming devices that can last for 5 years or more as energy is consumed only when required. Info Tag formats are customizable to customer needs.

#### Various Size Info Tags



Design Can Also Be Created with Black Background





## LinerLess Labels

### GOURMET SELECTION POTATO PIEROGI

INGREDIENTS: POTATOES, ENRICHED FLOUR (WHEAT FLOUR), SALTED BAKED FLOUR, MILK, WATER, VEGETABLE OIL (CORN BEAN OIL, CORN OIL), EGGS, ONION, SALT, FOLIC ACID, RIBOFLAVIN (VITAMIN B2), IRON, THIAMIN, MONOSODIUM PHOSPHATE (VITAMIN B1), RIBOFLAVIN (VITAMIN B2), FOLIC ACID, SUGAR



PACKED DATE: 14. 7.26 14. 7.31 s 7.48 /kg 0.689 kg  
 TOTAL PRICE \$5.00  
 DIGI STORE  
 5-13-12 KUGAHARA  
 OTA-KU TOKYO

Save Label


Flexible Design

### GOURMET SELECTION POTATO PIEROGI


INGREDIENTS: POTATOES, ENRICHED FLOUR (WHEAT FLOUR), SALTED BAKED FLOUR, MILK, WATER, VEGETABLE OIL (CORN BEAN OIL, CORN OIL), EGGS, ONION, SALT, FOLIC ACID, RIBOFLAVIN (VITAMIN B2), IRON, THIAMIN, MONOSODIUM PHOSPHATE (VITAMIN B1), RIBOFLAVIN (VITAMIN B2), FOLIC ACID, SUGAR



PACKED DATE: 14. 7.26 14. 7.31 s 7.48 /kg 0.689 kg  
 TOTAL PRICE \$5.00  
 DIGI STORE  
 5-13-12 KUGAHARA  
 OTA-KU TOKYO



Liner



Liner Less

No Liner


## On Demand Advertisement




## Specifications

General	Power Source	AC 100/110 or 220/230/240 Volts (50/60 Hz.)
	Dimensions	15.16 in (W) x 17.55 in (D) x 5.83 in (H)
	Net Weight	Approx. 26.46 lb
	Operation Humidity	15% - 85% RH Non-Condensation
Operating Temperature		-10° C to +40° C
Consoles	Operator Display	7 in and 12 in WVGA with Touch Panel (800 x 480/600), Adjustable Display
	Customer Display	7 in WVGA (800 x 480) Bench and Post 12.1 in-WVGA (800 x 600) P-Plus
	Memory	8 GB SD Std, Upgradeable to 128 GB
	Interface	Ethernet (Standard) 10/100 Base T, USB 2.0 Host
	Number of Preset Keys	Up to 16,000 Touch Screen Preset Keys, 28 Mechanical Keys
Printer	Print Method	Direct Thermal Printing
	Print Resolution	300 dpi
	Printing Width	30-80 mm (1.18-3.15 inches)
	Printing Length	28-240 mm (1.1-9.45 inches)
	Print Speed	Up to 150 mm/sec
	Label Roll Diameter	Outer-4.92 inches Interior-1.625 inches
Weighing	Capacity	Max. 30 lb
	Single-Range	0-30 lb x 0.01 lb
	Dual-Range	0-15 lb x 0.005 lb 15.01-30 lb x 0.01 lb
Options	Options	WLAN IEEE 802.11 a/ b/ g/ n, e.Labels, Info Tags, TVP-1500 Queue Printer, Speed ID
	Factory Option	LinerLess Printer with Auto-Cutter

### Side Dimensions SM-5500 Bench

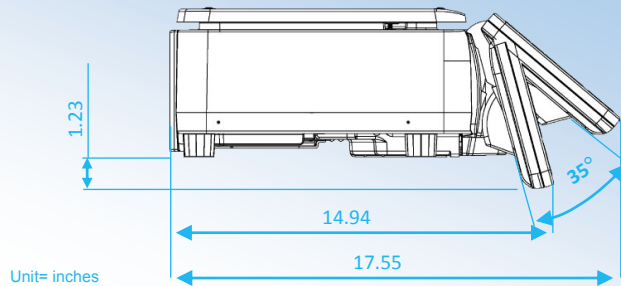

### Top and Front Dimensions SM-5500 Bench

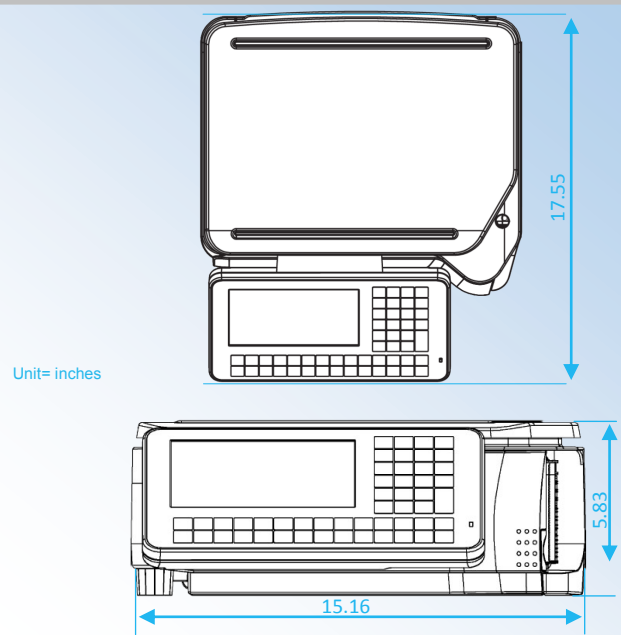

## New Brunswick International, Inc.

A DIGI Group Company

**Corporate Headquarters**      **West Coast Office**  
 76 Veronica Ave      530 West Central Ave. Suite C  
 Somerset, NJ 08873      Brea, CA 92821  
 TEL: (732) 828-3633      TEL: (714) 671-7911  
 FAX: (732) 828-4884      FAX: (714) 671-0798

[www.nbidigi.com](http://www.nbidigi.com)

## Dealer