


EMERGENCY LIGHTING TECHNICAL SPECIFICATION SHEET

DaxLite

Tel: 01252 311016
Email: sales@daxlite.com
Web: www.daxlite.com

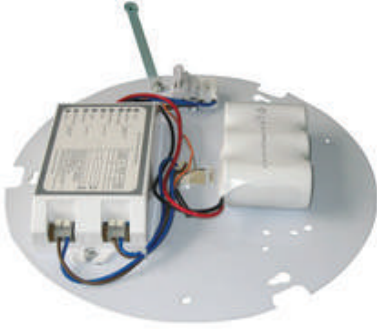

Product: 28W 2D Emergency Gear Tray
Product Code: DXEM28WGEAR
ISSUE A, 04.04.2013

GENERAL DETAILS

Description	EM Tray, 3 hours duration, suitable for 28W drum and lunar fittings.
Overall Dimensions (mm)	265mm rim dia. 35mm Depth
Product Weight	1.4 kg
Energy Rating	A

LIGHT SOURCE

Rated Wattage	6.0 Watts +/- 5%
Lumens	200 lumens (without diffuser)
Lumens per Watt	80 lumens per watt (without diffuser)
Recommended Product Location	Indoor
Light Source	2D lamp
Light Source Working Temperature	< 50°C

ELECTRICAL

Voltage (V)	180 - 240V 50 Hz. AC
Running Current (I)	0.13 Amps
Total Running Wattage (W)	15 W (includes light source and control gear)
Power Factor Correction (PFC)	>0.90
Electrical Classification	Class I
Battery	Tridonic Accu Nicd 3B 3 Cells 4Ah 3.6V

INSTALLATION

Distance from illuminated object	1.0m
Method of Fix	Surface Mount
Recommended Working Temperature	Min -20°C to Max +40°C

MATERIALS

Gear Tray	Steel
-----------	-------

APPROVALS

Guarantee	2 Years (from date of purchase)
Quality Assurance System	ISO9001:2008
Certificate of Conformity	CE