

LED Wheelhouse Dome Light



The images are merely illustrative, some technical features and accessories may be changed without notice.



December 2016

Product Description

Teslights' LED Wheelhouse Dome Lamp is in a standard downlight footprint featuring an ABC Switch located on the console to change the lamp color from white, to red, to blue. The switch also has a dimmer enabling the lamp to be dimmed to the level of your choice.



Key Features


- Remote control for colored lights
- 5 year factory warranty
- Resistant to shock, impact and vibrations
- Easy installation - pigtail and spring clips
- Lighting is not harmful to the eyes because we use LEDs that meet IES standards
- High efficient driver
- Modular manufacturing process
- IEC/EN 62471 photobiological standard class A (does no damage the retina)*1

*1 more information <http://www.intertek.com/lighting/photobiological-testing/>

Product Specifications

LED package:	SMD 2835
Power consumption:	10W
Input voltage:	100~277V AC 50/60Hz
Efficacy:	Up to 100 lm/W
THD:	<15%
P.F.:	>0.95
CRI:	>80
Dimming:	0-10V
Material:	6030 aluminum alloy glass cover and dacromet in bracket.
Beam angle:	120°
IP rating:	IP54
Fire rating:	UL94V0
Operating temperature:	-25°C ~ + 45°C
Lifespan:	Up to 50,000 hours

Product Measurement

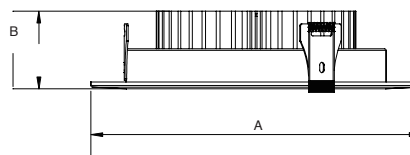


Model	Measures (ØAx B)
DL4	Ø140 x 50 mm



Ordering Guide

Example: DLW4P10E100FRBW

Type	Diameter		Dim or non-dim		Watts		Driver/Power		Efficiency		Cover		CCT	
DLW	4		P		10		E		100		F		RBW	
DLW	4	4'	P	Dimmable	10	10W	E	External 100-277V 50/60Hz	100	100 lm/W	F	Frost	RBW	Red, Blue and white

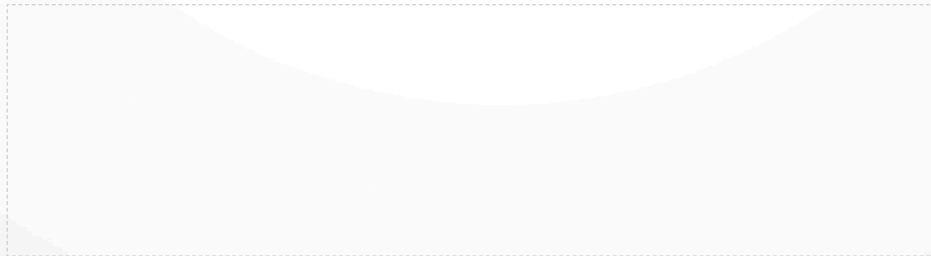

World Headquarters
1405 Corporate Center Pkwy.
Santa Rosa, CA 95407
USA
+1 844 TESLITE
www.teslights.com - info@teslights.com