



BroadBand Surface Mount (SMT) 2-Way RF Splitter/Combiner

Features:

- BroadBand 0.5 to 6 GHz Operation
- Low Loss (0.7 dB at 6 GHz)
- Excellent Amplitude/Phase Balance (+/- 0.1 dB, +/- 1°)
- RoHs Compliant
- High Power (20 watts as splitter)

Datasheet Model Number: [BBTLine_2Way_SMT](#)

Description: Shown below is a patented (U.S. Patent 9,570,792) broadband 2-way surface mount (SMT) RF Splitter/Combiner. This RF splitter is not a typical Wilkinson device, but a design which yields a more compact splitter/combiner with excellent low loss RF characteristics and high power handling capability.









RF Specifications:

| Specifications (at Room Temperature): | |
|---|----------|
| Frequency Range [GHz] | 0.5 to 6 |
| Insertion Loss [dB] | < 0.7 |
| Isolation [dB] (0.7 to 6 GHz) | > 19 |
| Isolation [dB] (0.5 to < 0.7 GHz) | > 15 |
| Input (Common Port) Return Loss [dB] | < -17 |
| Output Return Loss [dB] | < -18 |
| Maximum Power as Splitter [Watts] | > 20* |
| Maximum Power as Combiner [mWatts] | < 50 ** |
| Phase Unbalance [degrees] | +/- 1.0 |
| Amplitude Unbalance [dB] | +/- 0.1 |
| * maximum test setup capability at CW frequency of 3.55 GHz | |
| ** 0201 isolation resistor limitation when combining perfectly anti-phase signals | |


Typical Device RF Performance:

Note: measurements shown below are taken on a breakout board with short RF traces and two SMP edge-launch connectors...expect Insertion Loss of device to be 0.15 dB better than what is shown below (at 6 GHz) . Insertion Loss shown below includes ideal 2-way split loss of -3.0 dB.

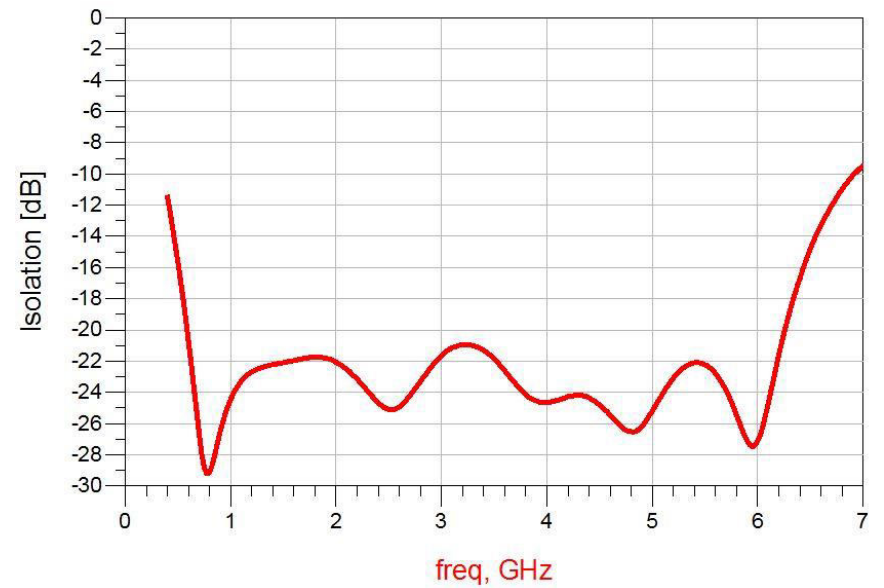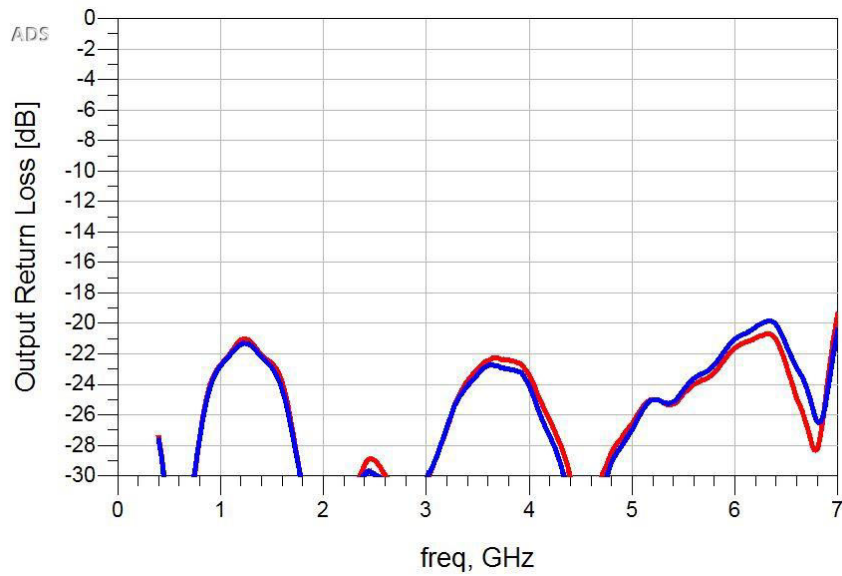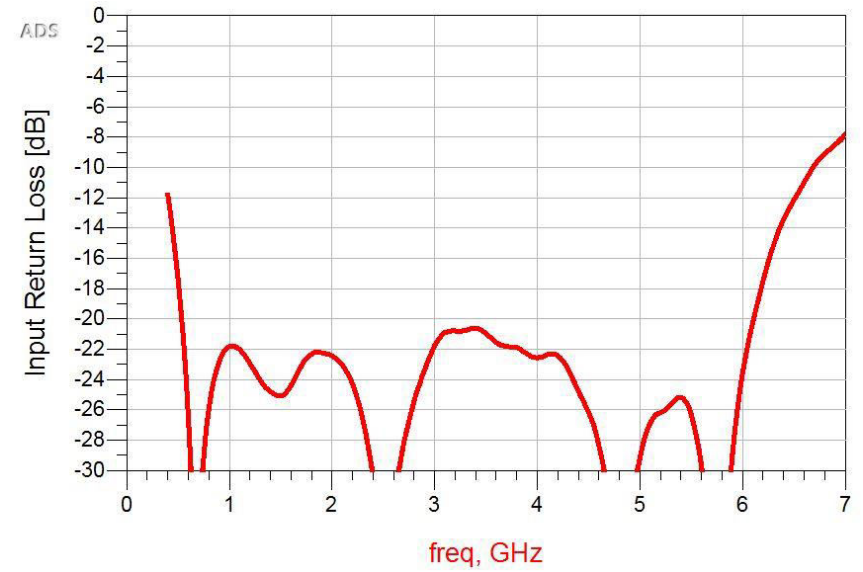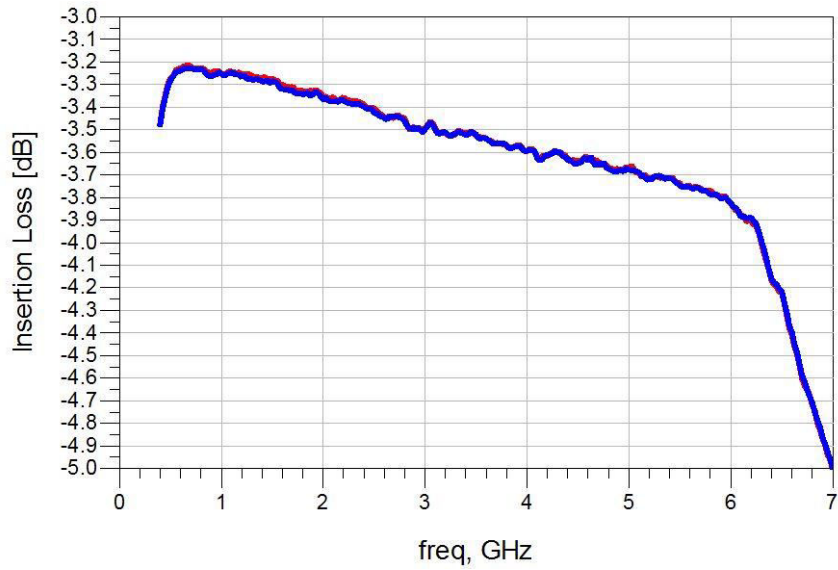


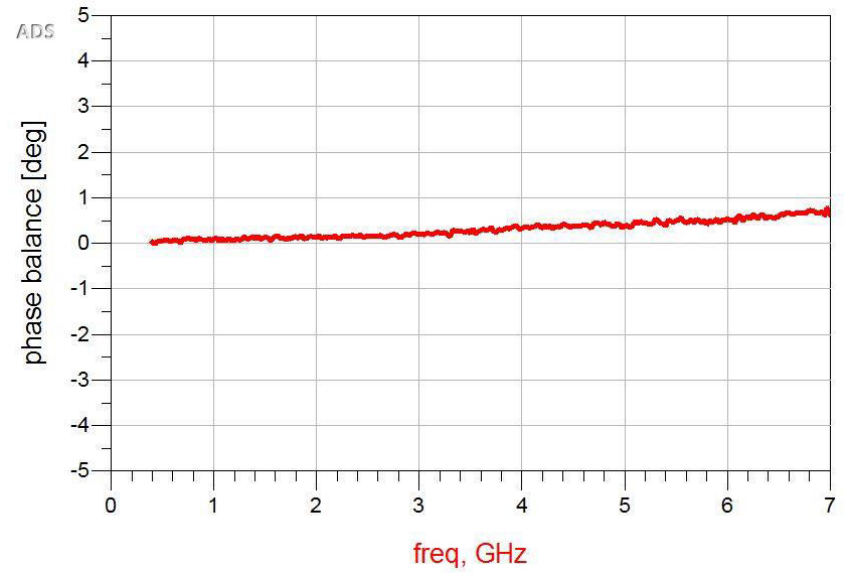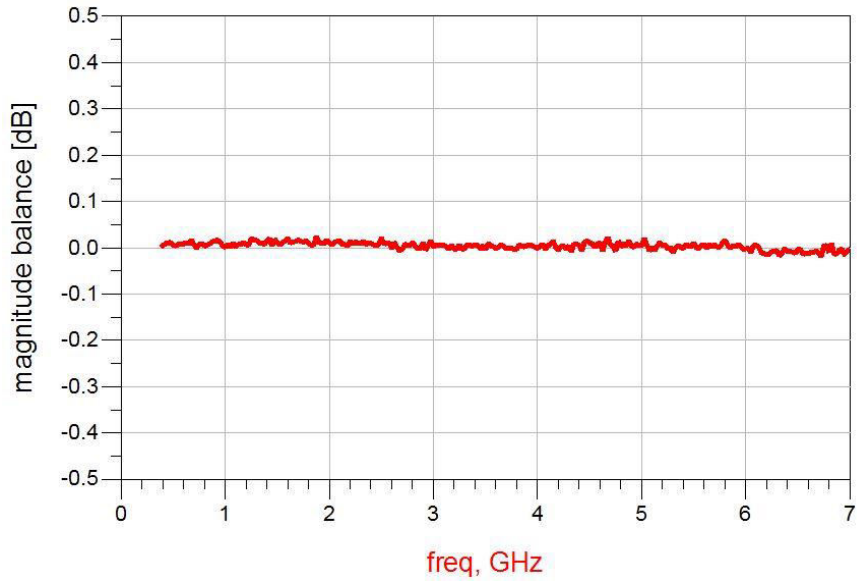


Mechanical Dimensions, Bottom View:

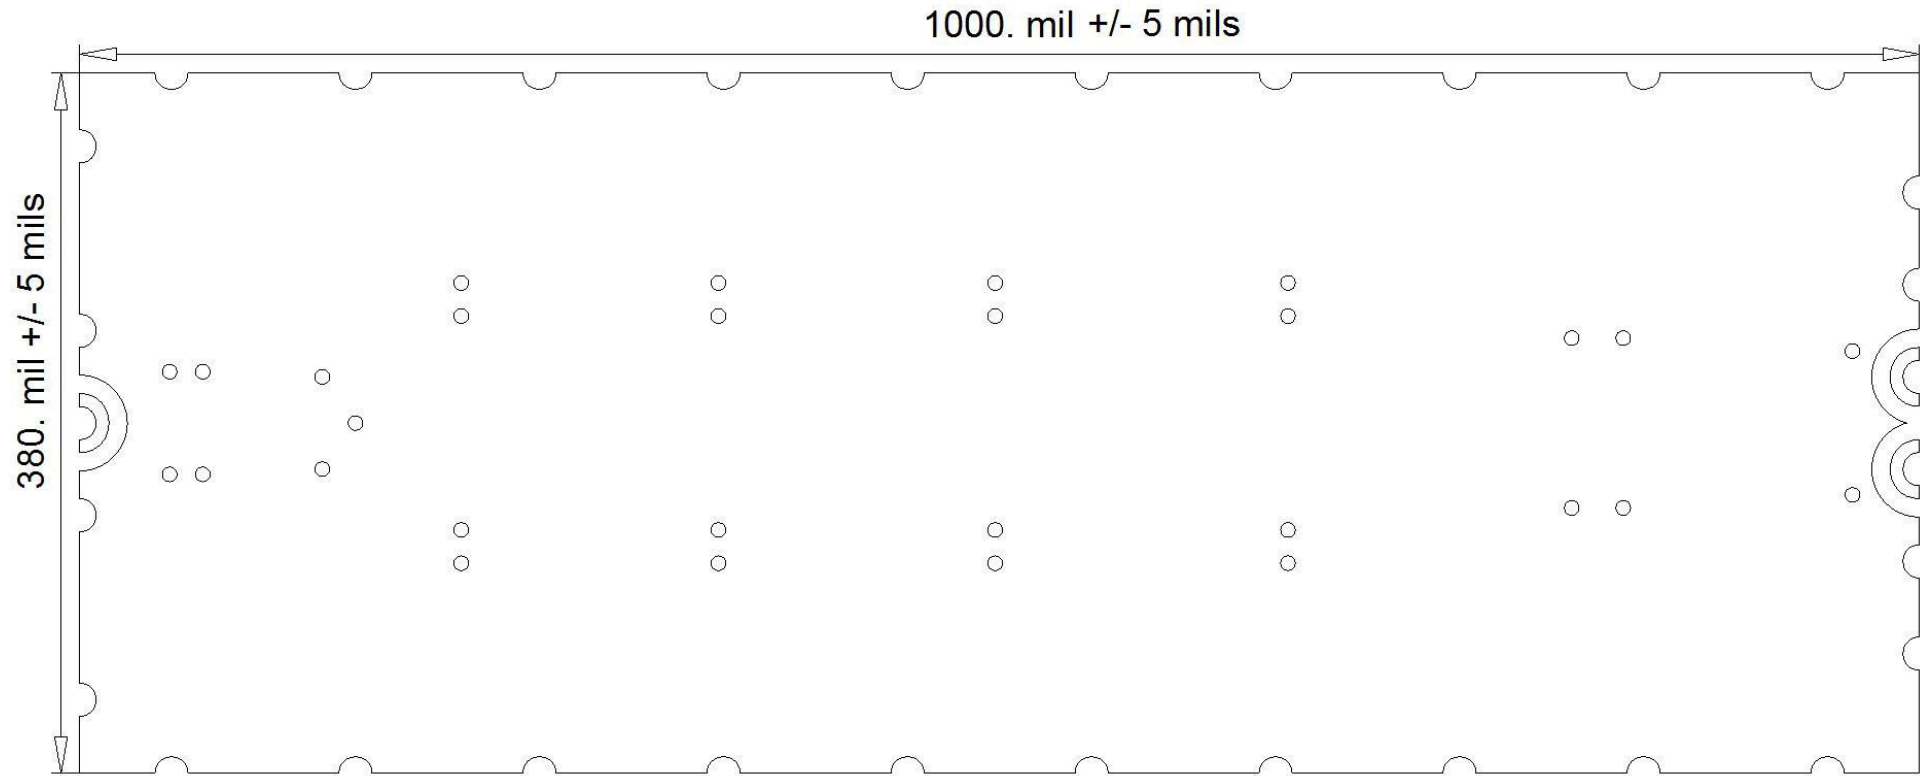



Mechanical Dimensions, Common Port End View (board vias are not shown):

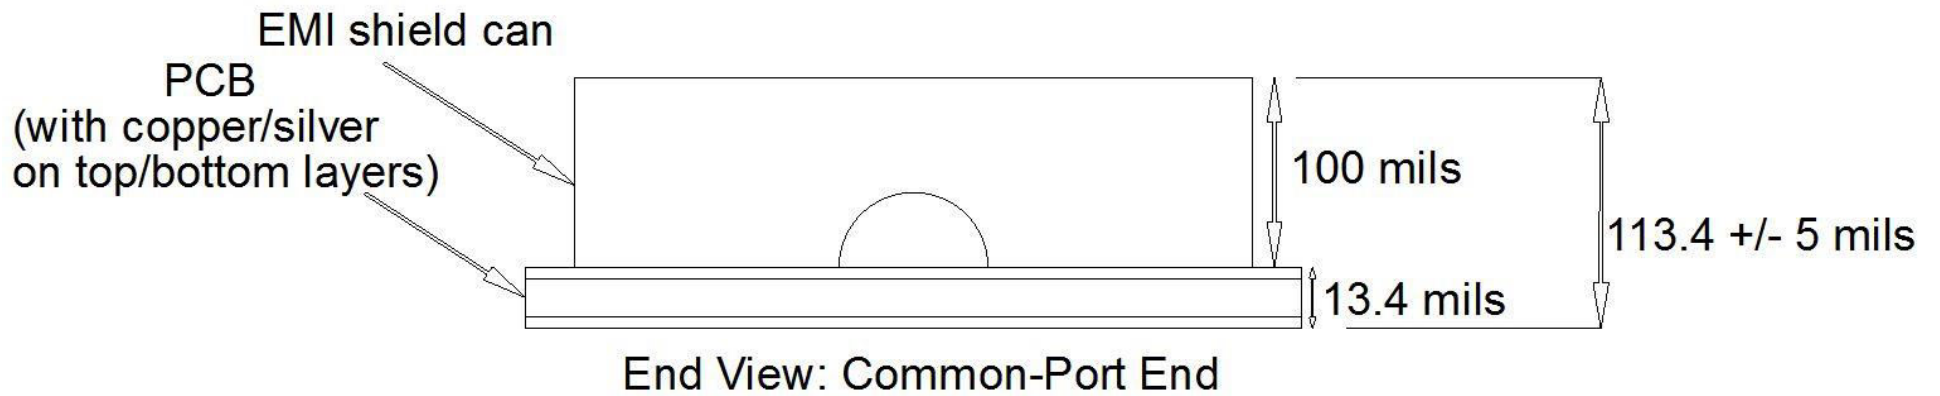


Mechanical Dimensions, Two-Port End View (board vias are not shown):

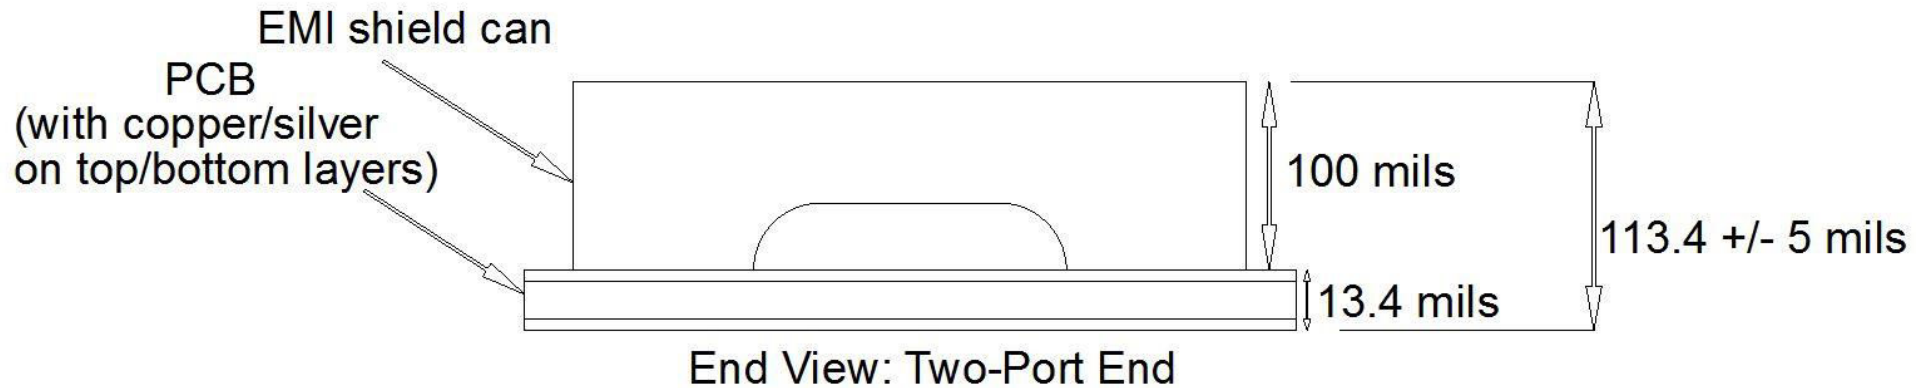

Mechanical Dimensions, Zoom-In On Device Via Details:

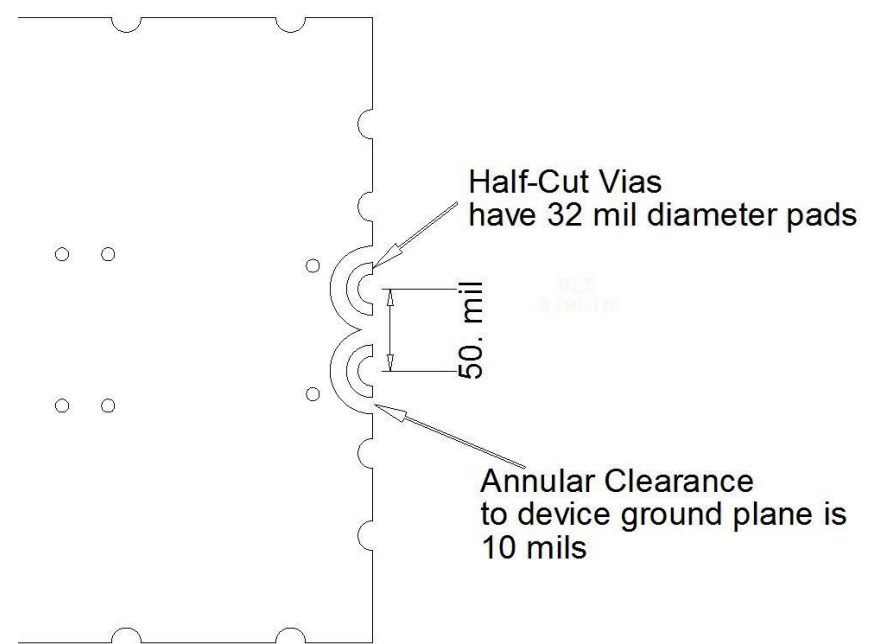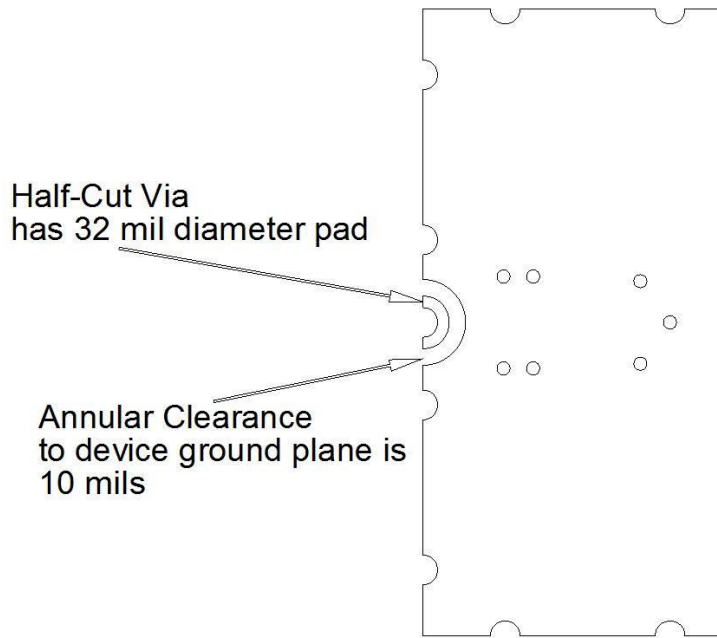

Recommended Board Layout (for a 10 mil thick Rogers 3003 core):

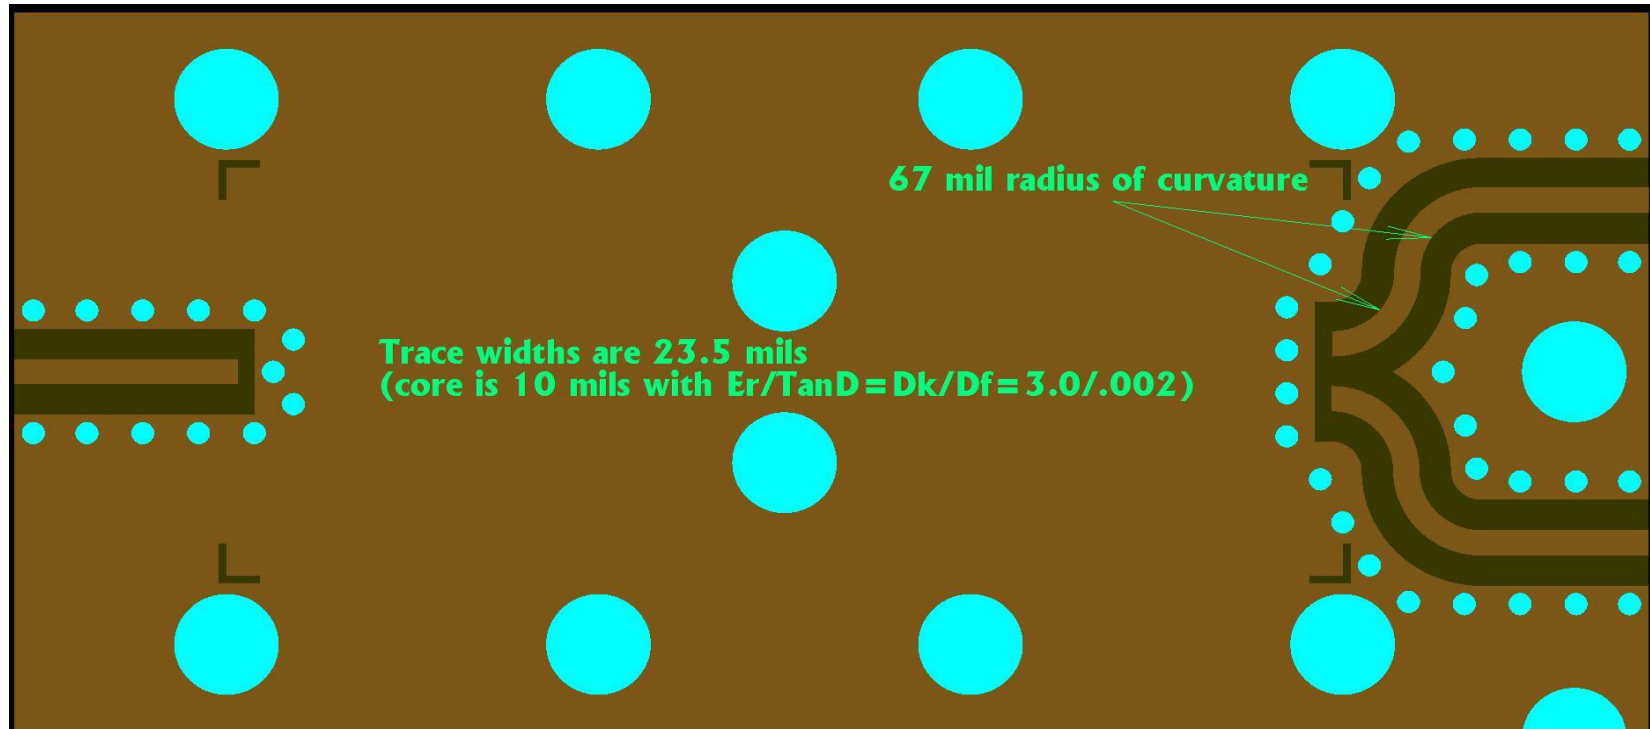

Note: As long as the RF trace width (CPWG or Microstrip) is held between 20 and 32 mils and return loss of the Tlines is better than 26 dB, there is negligible Insertion Loss deviation from what is shown above when considering other dielectric substrates (e.g., if you were to design on a 10 or 20 mil thick Rogers 4350B instead of the 10 mil Rogers 3003 shown above).