

Steel Self Jetting Wellpoints



Self-Jetting Wellpoint w/ PVC Screen

part # 301


Fabricated around a 1.5" galvanized inner pipe, the Complete Wellpoint features a PVC plastic 0.015" slotted filter screen, a jet head with a plastic ball valve for jetting and a saw-toothed tip to penetrate hardpan layers or other tough ground strata. The top coupling threads to standard 1.5" riser pipe.



Self-Jetting Wellpoint w/ SS Screen

part # 301-SS

All the great features of our well known PVC screen steel self-jetting wellpoint, but upgraded with a 0.015" Stainless Steel mesh filter screen. The top coupling threads to standard 1.5" riser pipe.

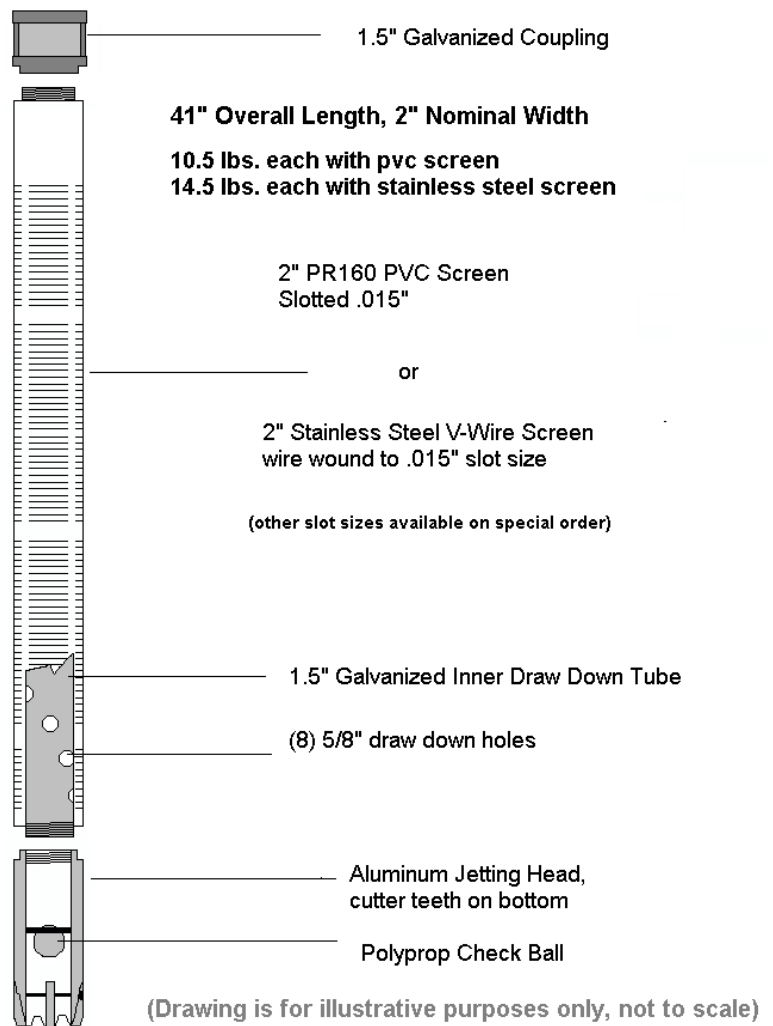

Welltop Adapter

O-ring style part # 302

Grommet style part # 302-GR




The aluminum welltop adapter screws onto the top of your 1.5" steel riser pipe. Our standard welltop has a cup opening that fits our 2" o-ring style swing joint elbow. We also have a welltop that allows you to insert a rubber grommet, for use on 1 1/2" systems with rubber grommet welltop and header inserts. This is also the connection point to attach the jetting adapter.



Jetting Adapter part # 313

Connected to the high pressure jetting hose from the jetting pump, the jetting adapter makes set-up for 'jetting in' the steel wellpoints a simple operation. The O-ring equipped jet fitting pushes into the Complete welltop on the wellpoint/riser



assembly and a spring-secured bracket slips under the welltop to provide a leak-free pressure connection of the wellpoint riser pipe to the jet pump. When the wellpoint is jetted in, the bracket is swung clear and the jet fitting pulled from the welltop, for use on the next wellpoint. No tools are required.



Steel Wellpoint Puller part # 314

This fitting, attached to a crane or other lifting mechanism, makes removal of the installed wellpoint a quick and simple job. The bracket simply slips under the welltop, the locking gate securing pin is positioned, and the wellpoint and riser pipe are then lifted straight out of the ground. The puller releases with a one-hand operation and is ready for use on the next wellpoint.



Swing Joint Assemblies

O-ring style part # 307

Grommet style part # 307-GR



We carry both our proprietary O-ring style swing joint (left) and the grommet fitting swing joint with tapered ends (right).



“The finest dewatering pumps and wellpoint equipment since 1923”