


- Used on pump suction or discharge to allow continuous flow of vehicle traffic in a construction area
- Built to withstand up to 20,000 lbs. per axle
- Low ramp clearance of 4" with angled leading edges
- All steel road ramps are fabricated in our Edgewater, FL facility
- Inspection port and drain for both ends
- Lifting eyes, internal baffle, drain fittings, safety flag holder, and enamel coating all included
- Ramps can be fabricated to our standard designs or per any customer specification

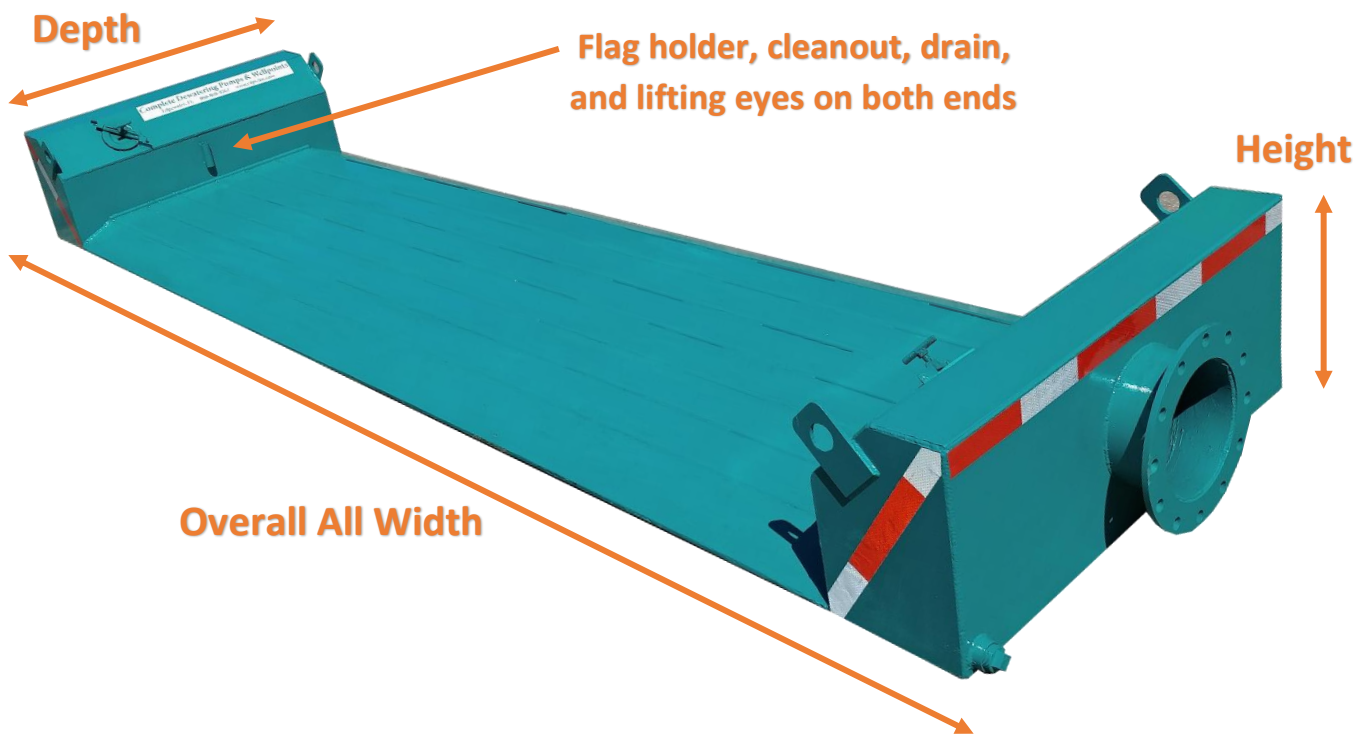

Part Number	Description	Passable (drive) Clearance	Pipe Connections*	Dry Weight, pounds
CROSS-6	Used for flows up to 1,200 GPM 15 ft. OAW x 2 ft. deep x 1.5 ft. high (up to 60psi working pressure)	12' wide	6" straight pipe or flanged	1,200
CROSS-6W	Used for flows up to 1,200 GPM 21 ft. OAW x 2 ft. deep x 1.5 ft. high (up to 60psi working pressure)	18' wide	6" straight pipe or flanged	1,500
CROSS-10	Used for flows up to 4,000 GPM 15.5 ft. OAW x 4.2 ft. deep x 1.5 ft. high (up to 40psi working pressure)	12' wide	10" flange	2,000

\*Bauer or camlock fittings also available, consult factory