


# AutoPrime™ Vacuum Assist Trash Pump 4 inch discharge

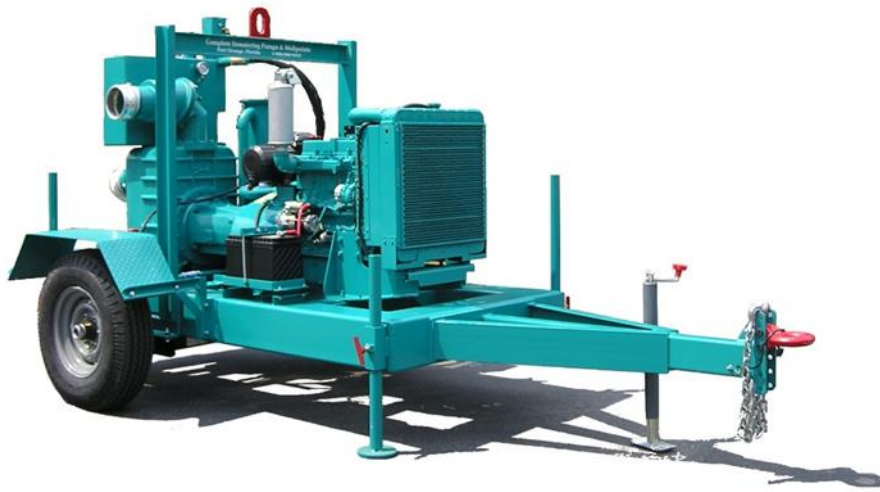

The ideal pump for:

- Construction projects
- Sewage by-pass
- Flood control
- Quarry dewatering
- Emergency drainage
- Open Sumping

### Diesel Configuration:

#### Model 4VATP-Dz3-C3-F(W)

Deutz D2011L03 air/oil cooled diesel engine  
32 cont. hp @ 1800 rpm  
Full instrument panel with safety shutdowns


### Electric Configuration:

#### Model 4VATP-E30-C3-F(W)

30 HP, 1800 rpm, 460 volt, 3 phase TEFC motor  
46.5 FL Amps @ 460 volts, 1.15 SF  
Fusible control panel with external disconnect,  
magnetic contactor, heater strip overloads

### Specifications:

- 800 GPM cast iron centrifugal pump
- 4" Suction x 4" Discharge
- up to 25' suction lift
- C3 vacuum pump, 68 cfm air handling, air cooled
- Closed loop vacuum oil recovery system with intercooler
- Air/water separation tank with peeler valve assembly
- Integral fuel tank / frame, 57-gallon capacity
- Single point lifting bale
- Optional: wheel mount with highway lights, fenders

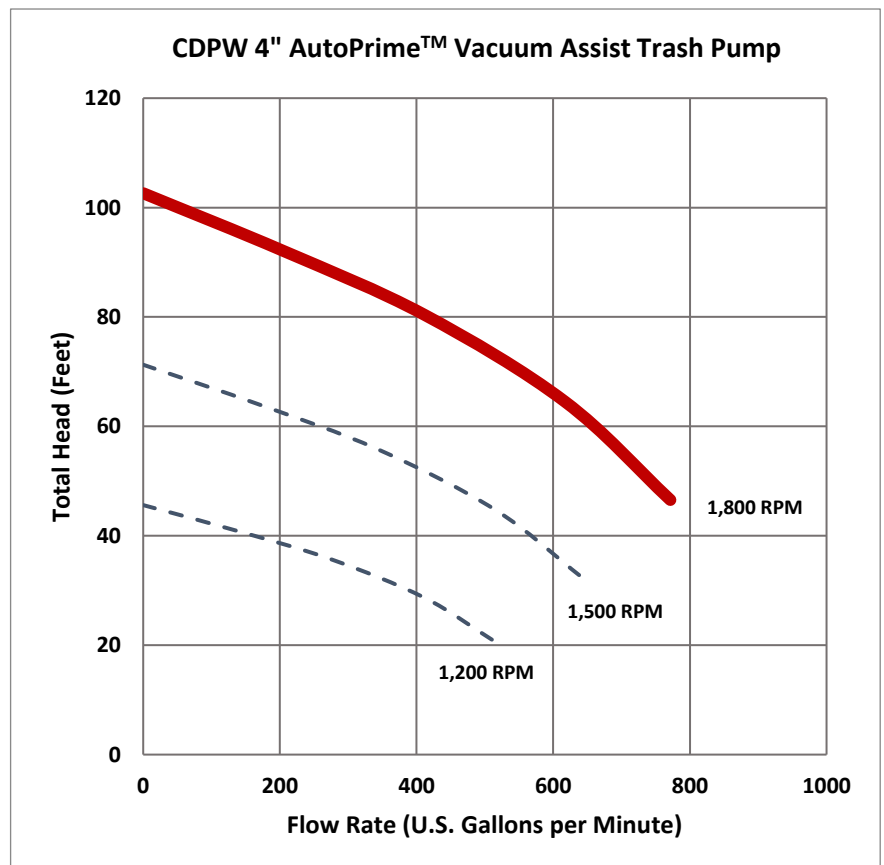

“The finest dewatering pumps and wellpoint equipment since 1923”

# Complete Dewatering 4VATP-Dz3-C3-F(W) 4" AutoPrime™ Vacuum Assisted Trash Pump

## SPECIFICATIONS

(All specifications subject to change without notice)

### Pump Component

Make: ..... Complete Dewatering  
 Model: ..... TP4, 4" self-priming centrifugal, long coupled  
 Casing: ..... Cast Iron  
 Impeller: ..... Semi-open 9.63", 2-vane  
 Seal: ..... Tungsten carbide  
 Coupling: ..... Long coupled, doughnut type elastomeric element  
 Suction, Discharge: ..... 4" x 4" threaded straight pipe, cam-lock or Bauer fittings optional

### Performance:

Pumping Capacity: ..... to 800 gpm (3008 l/m)  
 Head Capacity: ..... to 103' (31.4 m)  
 Suction Lift: ..... to 25' (7.6 m)  
 Solids Capacity: ..... to 3" spherical (7.62 cm)

### Diesel Engine

Make / Model: ..... Deutz D2011L03  
 Isuzu/Hatz/Kohler also available  
 Type: ..... 3-cylinder air/oil cooled diesel, naturally aspirated  
 Horsepower: ..... 32 hp continuous at 1800 rpm  
 Control Panel: ..... Murphy control panel with engine temp, oil pressure, voltage, tachometer, hour meter gauges; safety shutdowns on critical engine conditions.  
 Fuel Filters: ..... Dual fuel filter system with fuel/water separator

### Vacuum System

Vacuum Pump: ..... Complete C3-OF rotary vane, air cooled, oil lubricated  
 Air Handling: ..... 68 cfm  
 (alternate; C5 vacuum pump 130 cfm)  
 Lubrication: ..... Single point oiler w/ closed loop vacuum pump oil recovery system  
 Oil capacity: ..... 18 quarts, SAE 30 non-detergent  
 Vacuum system: ..... Suction priming constant vacuum system with a steel air/water separation tank, stainless steel peeler valve float mechanism to prevent water from entering the vacuum system, vacuum oil recovery tank w/ stainless steel demist element.  
 Separation Tank Access: .. 6" inspection cover accessible without tools

### Frame

Type: ..... Integral fuel cell / frame  
 Material: ..... 8" x ¼" steel box tube, welded and pressure tested  
 Fuel Capacity: ..... 57 gallons (216 liters); approx. 24-32 hours run time between refueling. Can also be used with an auxiliary fuel tank.  
 Clean out ports: ..... (4), one on each corner  
 Fuel filler: ..... 4" filler neck with lockable cap, sediment screen  
 Battery hold-down: ..... External, lockable bar  
 Lifting bale: ..... Single point, balanced  
 Paint: ..... All components are cleaned, then primed with an epoxy primer. Components are then painted with an industrial grade enamel. Custom colors are available.

### Wheel Mount Option

Axle: ..... Single axle, 3500# rated Torflex torsion axle.  
 Tires: ..... 225/75/R15, Highway rated, load range D  
 Fenders: ..... Steel bolt on replaceable  
 Tow Hitch: ..... To match your towing vehicle (ball, pintel, lunette eye) with safety chains  
 Leveling: ..... Drop down posts on all corners of the pump, front wind-down jack stand  
 Brakes (optional): ..... Hydraulic surge or electric with battery backup and charger

### Dimensions

Frame Mount: ..... Length 7.3' (87", 221 cm)  
 Width 4' (50", 127 cm)  
 Height 5.4' (65", 165 cm)  
 Weight 2800 lbs. (1275 kg)  
 Wheel Mount: ..... Length 12.0' (144", 366 cm)  
 Width 6.6' (80", 230 cm)  
 Height 6.8' (82", 208 cm)  
 Weight 3300 lbs. (1500 kg)

### Options

Wheel mounts and trailer options  
 Increased fuel capacity  
 Vacuum pump upgrade  
 "Whisper Pack" full or partial enclosures

### Warranty

CDPW Inc. warranties the entire unit for one year parts and labor against defects in product or workmanship. Engine warranties are carried by the manufacturer and may exceed one year.