


The Complete AutoPrime™ Wellpoint Pump has been the industry standard for wellpoint and sock underdrain dewatering since 1923. The VAWP series integrates our unique vacuum system with high performance centrifugal pumps for maximum

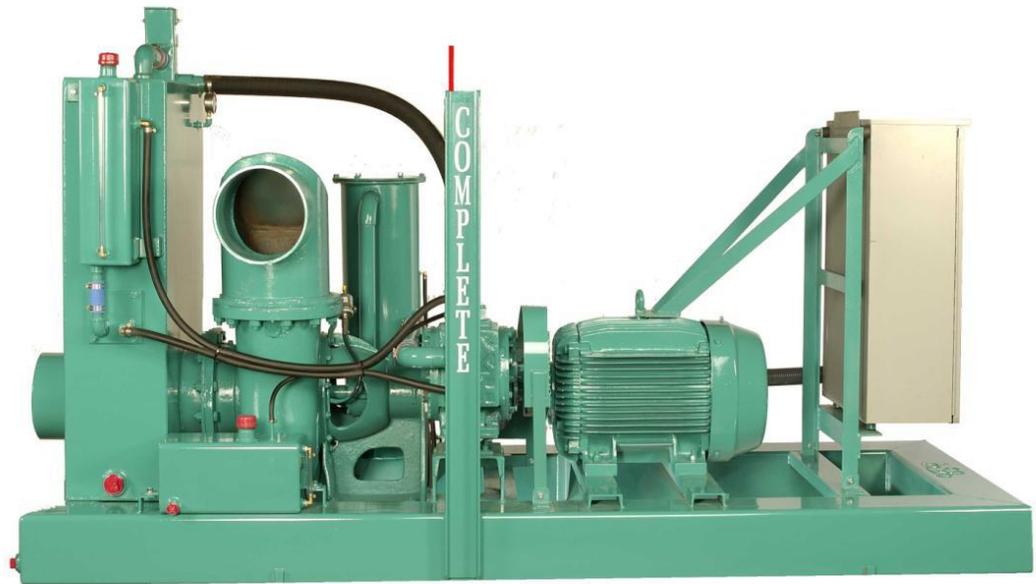

performance in air handling and water volume. The rotary vane vacuum system is independent of the centrifugal pump, with no cross contamination to wear on vacuum pump tolerances. Available in sizes from 4" to 10", diesel or electric powered.

Model*	4VAWP	6VAWP	8VAWP	10VAWP
Suction / Discharge	6" x 4"	6" x 6"	8" x 8"	10" x 10"
Max. Flow Rate (GPM)	830	1,400	2,700	4,400
Max. TDH (ft.)	68'	102'	84'	108'
Vacuum Pump model	C3-OF	C5W-OF	C10W-OF	C10W-OF
Vacuum Pump Flow (cfm)	65	130	200	200
Electric Motor (3 phase only)	TEFC 20 Hp 4-pole, 60 Hz	TEFC 40 Hp 4-pole, 60 Hz	TEFC 50 Hp 4-pole, 60 Hz	TEFC 75 Hp 4-pole, 60 Hz
Voltage**	200 / 230 / 460	230 / 460	230 / 460	460
Amps**	52.4 / 47.4 / 23.7	93 / 46.5	114.6 / 57.3	86.4
Size L x W x H (inches)	75 x 40 x 60	98 x 50 x 70	98 x 50 x 70	124 x 50 x 70
Dry Weight (pounds)	2,000	3,000	3,400	4,800

\*Specify model VAWP = Vacuum Assist WellPoint Pump

\*\*other voltages available, consult factory

**“The finest dewatering pumps and wellpoint equipment since 1923”**

## Wellpoint Pumps (VAWP) 4 to 10 inch discharge units



### Standard Features:

- Pumping flow rate to 4,400 GPM; Heads to 108 ft. TDH.
- Complete Vacuum Assist System with a high volume rotary vane liquid cooled vacuum pump (air cooled on the 4VAWP)
- Large steel air / water separation tank with automatic peeler valve assembly
- Closed loop vacuum oil recovery system with cyclonic vacuum oil reclaimer (exhaust filter optional)
- High performance cast iron centrifugal pumps
- Single point lifting bail, Discharge check valve, and Volute drain all standard
- High efficiency Totally Enclosed Fan Cooled motor for reduced cost and noise verses diesel
- Standardized parts across all sizes
- Large, easily accessible NEMA control panel with external disconnect, fuse block, magnetic contactor, and adjustable overload
- Diesel engine (Tier 3 rebuilt or Tier 4 new) or additional Electric motor options available

### Options:

- Vacuum pump upgrade
- "Whisper Pack" full or partial enclosures
- Trailer mounted: Highway wheels / tires, Torsion bar axle, DOT light kit, Highway fenders, Tow hitch, and Brake kit available
- Camlock or Bauer type suction and discharge fittings (please consult CDPW for additional fittings)

