


AutoPrime™ Vacuum Assist Trash Pump 6 inch discharge

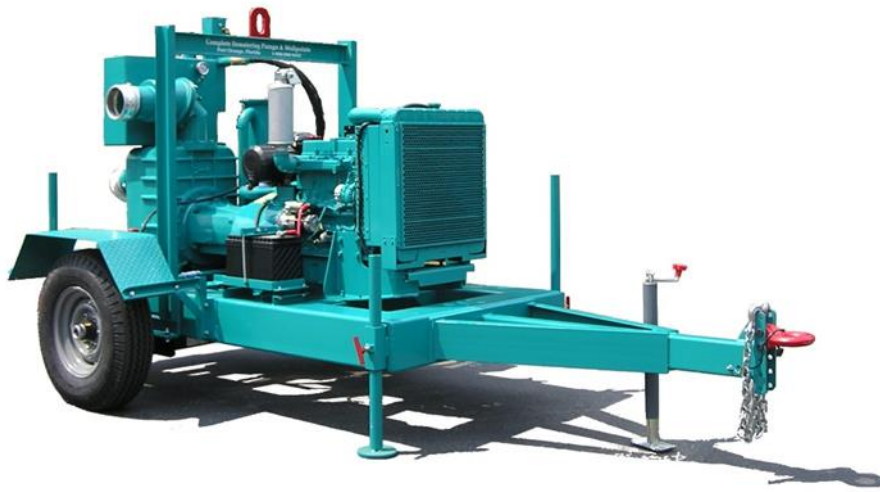

The ideal pump for:

- Construction projects
- Sewage by-pass
- Flood control
- Quarry dewatering
- Emergency drainage
- Open Sumping

Diesel Configuration:

Model 6VATP-1z4T-C3-F(W)

Isuzu 4LE2X turbocharged EPA Final Tier 4 liquid cooled diesel engine, 58 cont. hp @ 2000 rpm
Full instrument panel with safety shutdowns


Electric Configuration:

Model 6VATP-E50-C3-F(W)

50 HP, 1750 rpm, 460 volt, 3 phase TEFC motor
57.3 FL Amps @ 460 volts, 1.15 SF
NEMA control panel with external disconnect, fuse block, magnetic contactor, adjustable overload

Specifications:

- Heavy duty cast iron centrifugal pump
- 6" Suction x 6" Discharge
- up to 25' suction lift
- C3 vacuum pump, 65 cfm air handling, air cooled
- Closed loop vacuum oil recovery system with intercooler
- Air / water separation tank with peeler valve assembly
- Integral fuel tank / frame, 62-gallon capacity
- Single point lifting bale
- Optional: wheel mount with highway lights, fenders

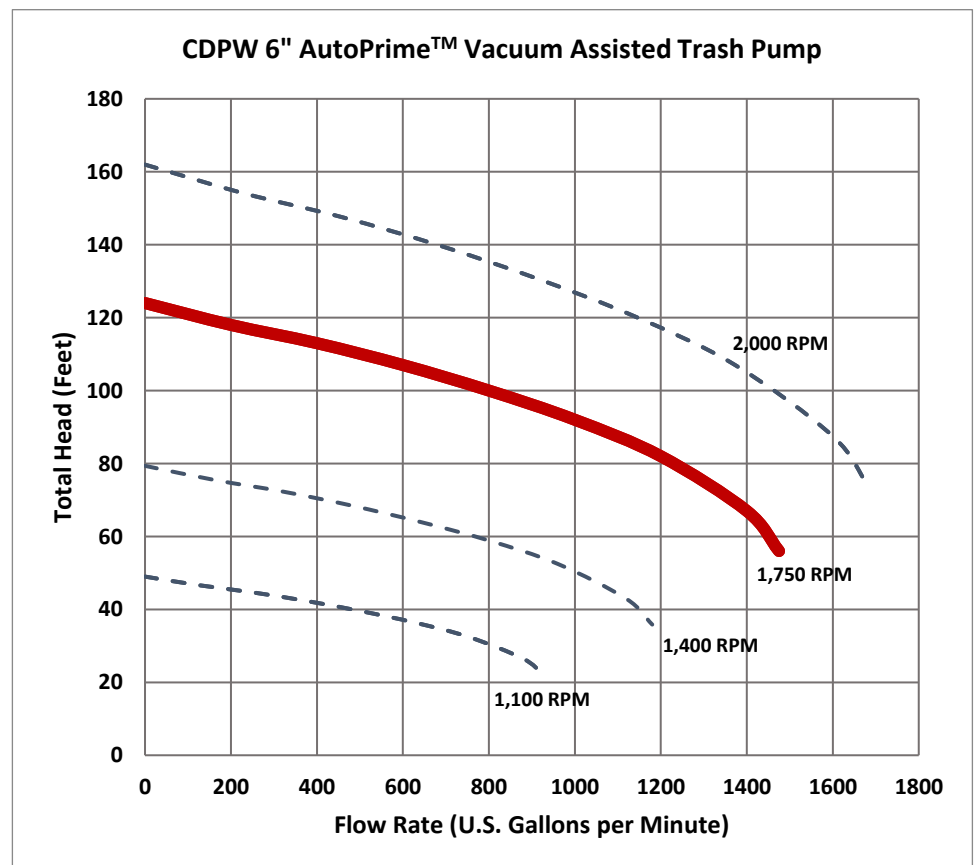

“The finest dewatering pumps and wellpoint equipment since 1923”

Complete Dewatering 6VATP-Iz4T-C3-F(W) 6" AutoPrime™ Vacuum Assist Trash Pump

SPECIFICATIONS

(All specifications subject to change without notice)

Pump Component

Make: Complete Dewatering
 Model: TH6, 6" heavy duty self-priming centrifugal
 Casing: Cast Iron
 Impeller: Semi-open 11.25", 2-vane
 Seal: Tungsten carbide
 Coupling: Long coupled, doughnut type elastomeric element
 Suction, Discharge: 6" x 6" threaded straight pipe; cam-lock or Bauer fittings optional

Performance

Pumping Capacity: to 1600 gpm (7280 l/m)
 Head Capacity: to 160' (48.8 m)
 Suction Lift: to 25' (7.6 m)
 Solids Capacity: to 3" spherical (7.62 cm)

Diesel Engine

Make / Model: Isuzu 4LE2X
 John Deere/Hatz/Kohler/Yanmar also available
 Emissions: EPA Final Tier 4
 Type: 4-cylinder liquid cooled diesel, turbocharged
 Horsepower: 58hp continuous at 2000 rpm
 Control Panel: Murphy digital control panel with engine rpm, oil pressure, coolant temperature, voltage, hour meter, and electronic throttle control; safety shutdowns on critical engine conditions.
 Fuel Filters: Dual fuel filter system with fuel/water separator

Vacuum System

Vacuum Pump: Complete C3-OF rotary vane, air cooled, oil lubricated
 Air Handling: 65 cfm
 (alternate; C5 vacuum pump 130 cfm)
 Lubrication: Single point oiler w/ closed loop vacuum pump oil recovery system
 Oil capacity: 18 quarts, SAE 30 non-detergent
 Vacuum system: Suction priming constant vacuum system with a steel air/water separation tank, peeler valve float mechanism to prevent water from entering the vacuum system, vacuum oil recovery tank w/ stainless steel demist element.
 Maintenance access: Inspection cover access without tools to both pump impeller and peeler valve

Frame

Type: Integral fuel cell / frame
 Material: 8" x ¼" steel box tube, welded and pressure tested
 Fuel Capacity: 62 gallons (235 liters); approx. 24 hours run time between refueling. Can also be used with an auxiliary fuel tank.
 Clean out ports: (4), one on each corner
 Fuel Gauge: Mechanical dial
 Fuel filler: 4" filler neck with lockable cap, sediment screen
 Battery hold-down: External, lockable bar
 Lifting bale: Single point, balanced
 Paint: Epoxy primed and painted with an industrial grade enamel. Custom colors are available.

Wheel Mount Option

Axle: Single axle, 6000# rated Torflex torsion axle.
 Tires: 225/75/R15, Highway rated, load range D
 Fenders: Steel bolt on replaceable
 Tow Hitch: To match your towing vehicle (ball, pintel, lunette eye) with safety chains
 Leveling: Drop down posts on all corners of the pump, front wind-down jack stand
 Brakes (optional): Hydraulic surge or electric with battery backup and charger

Dimensions

Frame Mount: Length 8' (98", 250 cm)
 Width 4' (50", 127 cm)
 Height 6' (70", 178 cm)
 Weight 3700 lbs. (1680 kg)
 Wheel Mount: Length 12.5' (150", 380 cm)
 Width 7.5' (90", 230 cm)
 Height 6.8' (82", 208 cm)
 Weight 4200 lbs. (1920 kg)

Options

Automatic start / stop with float switches
 Increased fuel capacity
 Vacuum pump upgrade (130 cfm)
 "Whisper Pack" full or partial enclosures

Warranty

CDPW Inc. warranties the entire unit for one year parts and labor against defects in product or workmanship. Engine warranties are carried by the manufacturer and may exceed one year.