



**Diesel Configuration:**

**Model 2.5JPE-Y4-F(W)**

Yanmar 4TNV88C EPA Final Tier 4 liquid cooled diesel engine  
46 cont. hp @ 2800 rpm, Full instrument panel with safety shutdowns




The ideal pump for:

- Wellpoint hand jetting
- Irrigation for golf courses and agriculture
- Washing of crushed rock and industrial equipment
- Water blasting applications

**Specifications:**

- Up to 290' (125 psi) head pressure
- 600 GPM cast iron centrifugal pump
- 4" Suction x 3" Discharge (discharge bushed to 2-1/2" MNPT)
- Manual hand primer
- Integral fuel tank / frame, 23-gallon capacity
- Single point lifting bale
- Optional: wheel mount with highway lights, fenders

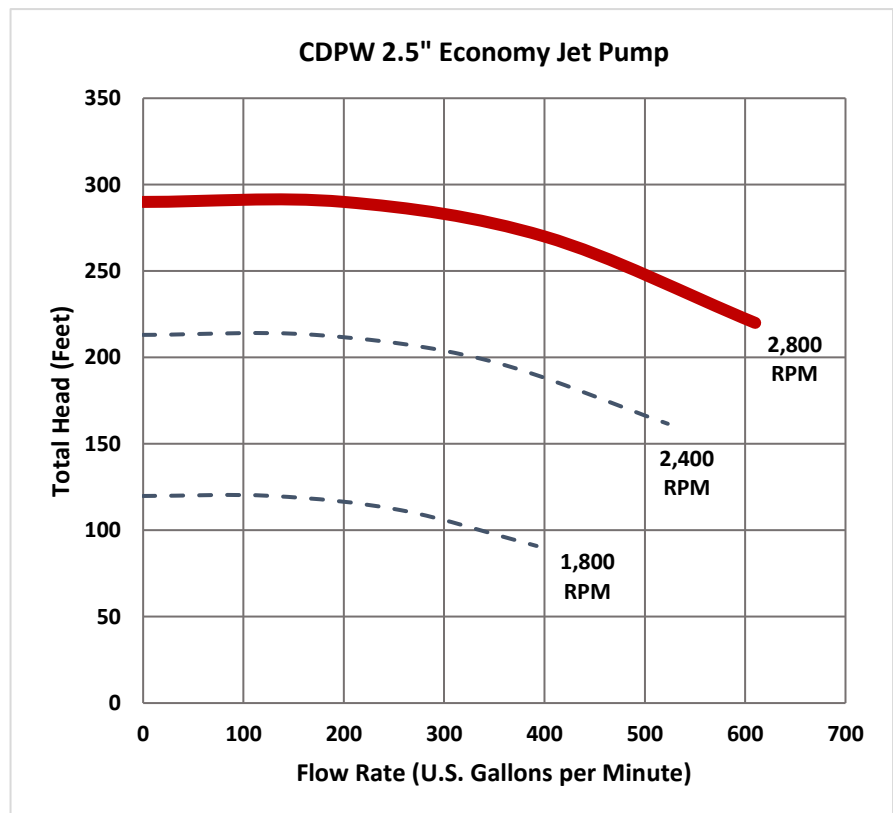

“The finest dewatering pumps and wellpoint equipment since 1923”

# Complete Dewatering 2.5JPE-Y4-F(W) 3" High Pressure Economy Jet Pump

## SPECIFICATIONS

(All specifications subject to change without notice)

### Pump Component

Make: ..... Complete Dewatering  
 Model: ..... Berkeley B-series, end suction centrifugal, SAE coupled  
 Casing: ..... Cast Iron  
 Impeller: ..... Fully enclosed 10.5" dia.  
 Seal: ..... Packing or mechanical seal  
 Coupling: ..... Direct coupled, SAE mount  
 Suction, Discharge: ..... 4" x 3" NPT tread, bushed to 2-1/2" MNPT, cam-lock or Bauer fittings optional

### Performance:

Pumping Capacity: ..... to 600 gpm (2271 l/m)  
 Head Capacity: ..... to 290' (88 m)  
 ..... to 125 psi

### Diesel Engine

Make / Model: ..... Yanmar 4TNV88C  
 Hatz/Isuzu/Kohler also available  
 Emissions: ..... EPA Final Tier 4  
 Type: ..... 4-cylinder liquid cooled diesel, naturally aspirated  
 Horsepower: ..... 46 hp continuous at 2800 rpm  
 Control Panel: ..... Murphy control panel with engine temp, oil pressure, voltage, tachometer, hour meter gauges; safety shutdowns on critical engine conditions.  
 Fuel Filters: ..... Dual fuel filter system with fuel/water separator

### Frame

Type: ..... Integral fuel cell / frame  
 Material: ..... 6" x 1/4" steel box tube, welded and pressure tested  
 Fuel Capacity: ..... 23 gallons (86 liters); approx. 12-18 hours run time between refueling. Can also be used with an auxiliary fuel tank.  
 Clean out ports: ..... (4), one on each corner  
 Fuel Gauge: ..... Mechanical dial  
 Fuel filler: ..... 4" filler neck with lockable cap, sediment screen, mechanical fuel gauge  
 Battery hold-down: ..... External, lockable bar  
 Lifting bale: ..... Single point, balanced  
 Paint: ..... Epoxy primed and painted with an industrial grade enamel. Custom colors are available.

### Priming System

Primer: ..... Complete CP9 hand primer  
 Suction lift: ..... up to 17' (5.2m)  
 Suction hose: ..... up to 25 ft. of 4" diameter hose with foot valve and strainer (order separately)

### Wheel Mount Option

Axle: ..... Single axle, 2200# rated Torflex torsion axle.  
 Tires: ..... 205/70/R14, Highway rated, load range C  
 Fenders: ..... Steel bolt-on replaceable  
 Tow Hitch: ..... To match your towing vehicle (ball, pintel, lunette eye) with safety chains  
 Leveling: ..... Drop down posts on all corners of the pump, front wind-down jack stand  
 Brakes (optional): ..... Hydraulic surge or electric with battery backup and charger

### Dimensions

Frame Mount: ..... Length 5.4' (65", 165 cm)  
 Width 3.5' (42", 107 cm)  
 Height 4.5' (54", 137 cm)  
 Weight 1600 lbs. (730 kg)  
 Wheel Mount: ..... Length 10' (120", 304 cm)  
 Width 6.3' (76", 193 cm)  
 Height 5.5' (66", 168 cm)  
 Weight 2100 lbs. (955 kg)

### Options

Wheel mounts and trailer options  
 Automatic priming system  
 Increased fuel capacity  
 "Whisper Pack" full or partial enclosures

### Warranty

CDPW Inc. warranties the entire unit for one year parts and labor against defects in product or workmanship. Engine warranties are carried by the manufacturer and may exceed one year.