
# Electric submersible dewatering pumps

Medium and large WEDA range (60 Hz)

Sustainable Productivity

Atlas Copco

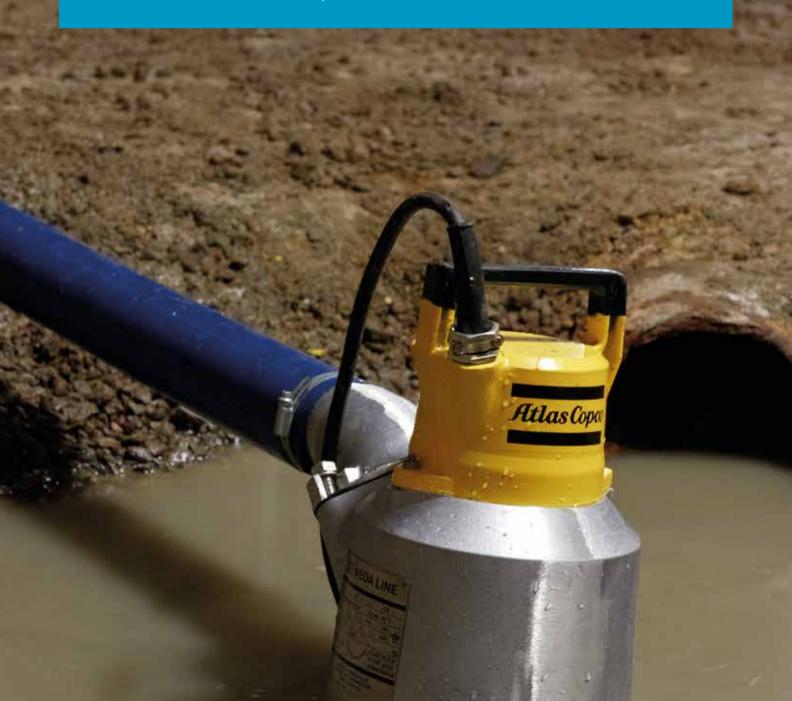

# WEDA dewatering pumps

WEDA pumps and accessories were designed for an extensive range of dewatering applications, across multiple industries. They provide the performance, reliability and ease of use you need. WEDA pumps feature a built-in starter and motor protection system along with optional automatic level control. Adjustable wear resistant rubber diffusors and hardened high chrome impellers ensure durability in tough environments.

WEDA pumps are made for durability. The unique sealing system and modular design make them one of the most flexible pumps on the market. Easy to use and maintain, WEDA pumps promise optimal performance. The WEDA ISP (Instant Service Pack) is the optimum maintenance solution and can be easily fitted at the job site.

With the ability to handle flows up to 6,100 US gpm and a power rating up to 84 Hp, WEDA pumps are the perfect partner for your dewatering needs.



**POWERFUL & PORTABLE** 











# The WEDA+ range

During 2017, we are launching a new WEDA+ range. We are taking the most popular models and giving you even more than before. The WEDA+ range includes all of the characteristics customers have come to expect from existing WEDA pumps; with the addition of new features that have been developed to take performance to the next level. Benefits include higher efficiency, simplified maintenance and increased capacity.

There are five new WEDA+ models being launched. We are especially excited with the new Super High Head WEDA 60+. This model is the smallest and lightest in its class and couples great performance with extreme portability. Across all models, a new feature of the range is rotation control and phase failure protection. This innovation negates the risk of the impeller rotating in the wrong direction and will stop the pump in event of phase failure.

The WEDA range is a plug and play solution but we have taken the WEDA+ models to the next level. This includes the adding of a new cable entry system, allowing the use of a wider range of cable configurations.

WEDA+ models feature a new, improved aluminum alloy with higher corrosion resistance. This increases robustness and lifetime, even when tacking the toughest of applications. We have also improved performance when it comes to solid handling and reduced the risk of clogging.









# WEDA standard features



Atlas Copco

# WEDA+ extended features

 New starter units with rotation control and phase failure protection New cable entry to allow multiple cable types and improved sealing

New motor design with higher efficiency and reduced start current


• New double row bearings with improved lifetime

 New hydrualic ends for higher efficiency and improved LCC


• Improved aluminum alloy with higher corrosion resistance

# Performance curves


## ✓ WEDA 10

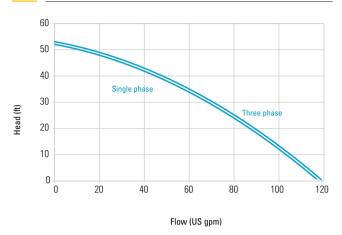


#### **WEDA 30**

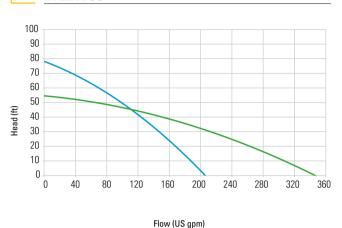


🔀 WEDA 40

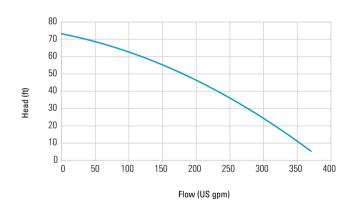


## **₩EDA 50+**

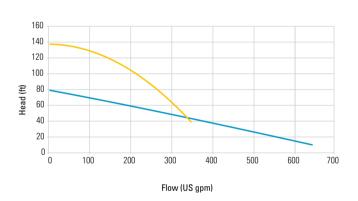

## **₩EDA 60+**

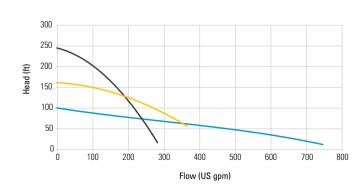


## 🔀 WEDA 70

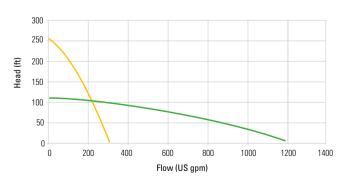






# WEDA 90

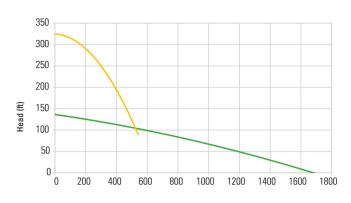


Flow (US gpm)


## ∠ WEDA 100

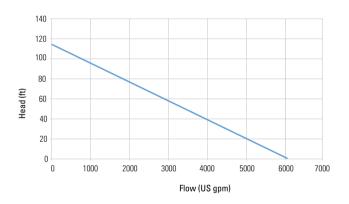

# **WEDA 60S**

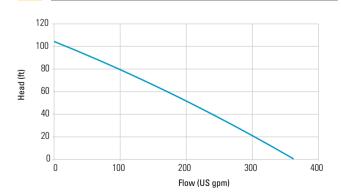



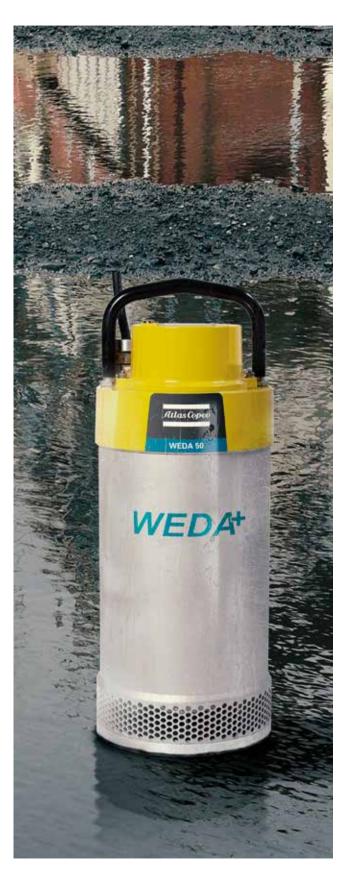

www.atlascopco.us








| ہمہ |      |
|-----|------|
|     | TECH |
|     |      |

| r <u>≏</u> 1            |        |              |             |          |             |             |
|-------------------------|--------|--------------|-------------|----------|-------------|-------------|
| E TECHNICAL DATA        |        | WEDA 10      |             | WEI      | WEDA 40     |             |
| Specifications          |        | Single phase | Three phase | Low head | Normal head | Normal head |
| Max. head               | ft     | 52           | 51          | 54       | 85          | 72          |
| Max. flow               | US gpm | 119          | 117         | 330      | 220         | 370         |
|                         | hp     | 2            | 2           | 4        | 4           | 5           |
| Rated output            | kW     | 1.5          | 1.2         | 2.7      | 2.3         | 4.4         |
| Max. power input        | А      | 13.5         | -           | -        | -           | -           |
| Rated current (110v)    | Α      | 6.1          | 3.6         | 11.5     | 6.7         | 11.3        |
| Rated current (230v)    | А      | -            | -           | -        | -           | -           |
| Rated current (400v)    | А      | -            | 2           | -        | 3.3         | 5.3         |
| Rated current (500v)    | А      | -            | -           | -        | -           | -           |
| Shaft speed             | rpm    | 3550         | 3550        | 3550     | 3550        | 3550        |
| Discharge connection    | inch   | 2"           | 2"          | 3" (4")  | 3" (4")     | 3" (4")     |
| Max solid handling size | in     | 0.16         | 0.16        | 0.27     | 0.27        | 0.27        |
| Weight and dimensions   |        |              |             |          |             |             |
| Weight                  | lbs    | 27.5         | 27.5        | 44       | 44          | 55          |
| Length                  | in     | 17.4         | 14.6        | 19.8     | 18.7        | 19.8        |
| Width                   | in     | 8.7          | 8.7         | 11.2     | 11.2        | 11.2        |
| Circumference           | in     | 7.2          | 7.2         | 8.6      | 8.6         | 8.6         |





# TYPICAL APPLICATIONS

Mining and tunneling















| WE          | DA 50+    | WEDA 60+    |           |                 |  |  |
|-------------|-----------|-------------|-----------|-----------------|--|--|
| Normal head | High head | Normal head | High head | Super high head |  |  |
| 79          | 137       | 101         | 162       | 245             |  |  |
| 638         | 343       | 746         | 366       | 282             |  |  |
| 8.5         | 8.5       | 11.5        | 11.5      | 11.5            |  |  |
| 7.5         | 7.5       | 9.9         | 9.9       | 9.9             |  |  |
| -           | -         | -           | -         | -               |  |  |
| 18.1        | 18.1      | 25.0        | 25.0      | 25.0            |  |  |
| 10.9        | 10.9      | 15.1        | 15.1      | 15.1            |  |  |
| 8.9         | 8.9       | 12.5        | 12.5      | 12.5            |  |  |
| 7.1         | 7.1       | 10.1        | 10.1      | 10.1            |  |  |
| 3460        | 3460      | 3470        | 3470      | 3470            |  |  |
| 4"(3")      | 3"(4")    | 4"(3")      | 3"(4")    | 3"(4")          |  |  |
| 0.32        | 0.32      | 0.32        | 0.32      | 0.32            |  |  |
|             |           |             |           |                 |  |  |
| 115         | 115       | 128         | 128       | 130             |  |  |
| 28.3        | 28.3      | 29.9        | 29.9      | 29.9            |  |  |
| 13          | 11.9      | 13          | 11.9      | 11.9            |  |  |
| 10.9        | 10.9      | 10.9        | 10.9      | 10.9            |  |  |

• Construction



• Industrial



• Emergency



• Maintenance



## Medium and large WEDA range pumps









| SI | ud | qe | P | u | m | p |
|----|----|----|---|---|---|---|
|    |    |    |   |   |   |   |

| E TECHNICAL I           | DATA   | WEDA 70 V |           | WED      | A 90      | WEDA 100    | WEDA 60S    |
|-------------------------|--------|-----------|-----------|----------|-----------|-------------|-------------|
| Specifications          |        | Low head  | High head | Low head | High head | Normal head | Normal head |
| Max. head               | ft     | 110       | 254       | 148      | 325       | 115         | 103         |
| Max. flow               | US gpm | 1200      | 300       | 1790     | 560       | 6100        | 360         |
| Rated output            | hp     | 15        | 15        | 36       | 36        | 84          | 10          |
| Max. power input        | kW     | 13.4      | 16.2      | 28.6     | 31        | 80          | 9           |
| Rated current (460v)    | Α      | 21.3      | 23.2      | 43       | 48        | 127         | 17          |
| Shaft speed             | rpm    | 3550      | 3550      | 3550     | 3550      | 1750        | 3420        |
| Discharge connection    | inch   | 6" (4")   | 4" (6")   | 6" (4")  | 4" (6")   | 10"         | 3" (4")     |
| Max solid handling size | in     | 0.27      | 0.27      | 0.27     | 0.27      | 0.47        | 1.96        |
| Weight and dimensions   |        |           |           |          |           |             |             |
| Weight                  | lbs    | 209       | 209       | 397      | 397       | 1124        | 154         |
| Length                  | in     | 15.5      | 15.5      | 41.6     | 41.6      | 55.5        | 29.5        |
| Width                   | in     | 35.8      | 35.8      | 17.2     | 17.2      | 25.5        | 12.9        |
| Circumference           | in     | 14.1      | 14.1      | 15.7     | 15.7      | 23.6        | 11.4        |



# Designed for you





#### **Pumps for Professionals**

WEDA pumps are made for durability. Unique sealing systems and modular design makes them some of the most cost-effective pumps on the market. They are assembled by skilled mechanics and made from the highest quality materials. Easy to use and maintain, WEDA pumps promise optimal performance.





#### **Modular Design**

Machined slots make it easy to separate the various parts of each pump. All stainless steel bolts and nuts used are the same size. This makes it possible to use one effective tool to complete the entire operation.





#### **Unique Sealing System**

You can change seals, impeller and other parts in minutes. For larger pumps, the WEDA ISP (Instant Service Pack) is the optimum maintenance solution. The ISP contains the seals, bearing oil and oil housing and can easily be changed at the work site.





#### **Light Weight and Compact Design**

The weight and dimensions make the WEDA pumps easy to transport, install and store also in confined areas.

# Portable Energy Solutions Portfolio

#### AIR COMPRESSORS







Diesel and electric options available.

#### **GENERATORS**







\*Multiple configurations available to produce power for any size application.

#### **DEWATERING PUMPS**

#### ELECTRIC SUBMERSIBLE

• up to 6,100 US gpm



#### CENTRIFUGAL DIESEL DRIVEN

• up to 3,655 US gpm



#### **LIGHT TOWERS**









Portfolio and options available can change depending on the market.

## Committed to sustainable productivity

Atlas Copco's Portable Energy division has a forward-thinking philosophy. For us, creating customer value is all about anticipating and exceeding your future needs – while never compromising our environmental principles. Looking ahead and staying ahead is the only way we can ensure we are your long term partner.

www.atlascopco.com

