

CONNECTORS

CONNECTING THE TIP SECTION TO THE BUTT
SECTION

FRICTION FIT BY SANDING

THREADED SCREW

MAGNETS

PIN & SLOTTED TUBE





STOP
BACKCOUNTRY
PERMIT REQUIRED
BEYOND THIS POINT

SOB DRAW

JUL 8 2008



JUL 8 2008



JUL 8 2008



CONNECTORS

FRICTION FIT BY SANDING





BUTT END OF TIP = .200 FLAT TO FLAT

.187 3/16-2"

DEC 18 2009



JAN 27 2010



WARNING: Always wear protection
of face, neck, and head.
AVERTISSEMENT: Do not be

JAN 27 2010



JAN 27 2010



JAN 27 2010



SEP 9 2009

CONNECTORS

THREADED SCREW



 **SmallParts™**

S/S RD TUBE TYPE 304 1/8" OD
.020 WALL 12" LONG

Part # : GPTX-22/02-12



MAR 22 2010



JUN 22 2007

CONNECTORS

MAGNETS





ZD4



K&J MAGNETICS

Neodymium (NdFeB) Magnets

Grade N35

Disc, 3mm x 1.5mm

Qty: 100

www.kjmagnetics.com

DAI #66 8-TIP

MAR 22 2010



MAR 22 2010



AUG 22 2008

CONNECTORS

PIN & SLOTTED TUBE





MAR 22 2010

#76 A

#76 B



.218

.187

.152

OCT 30 2009



OCT 30 2009

.218



.187



.152



OCT 30 2009




.218

.187

.152

OCT 30 2009



218 壳



187 壳



152 壳



OCT 30 2009




218 品

187 品

152 品

OCT 30 2009

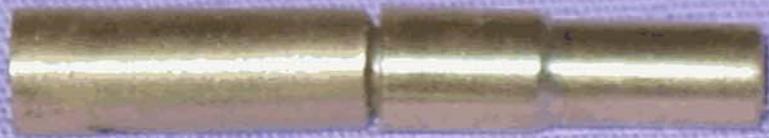

OCT 30 2009



MAR 22 2010

#76 A

#76 B

CONNECTORS

THE END



