


## »»» Airtight Automatic Sliding Door



### Standard specifications

		Single leaf	Double leaves
Application	Door weight	within 160kg <Max.24kg>	within 220kg *2 <Max.220kg>
	Door width	DW=600-1500mm	DW=800-1300mm
	Door range	W=1400-4200mm	W=2300-4200mm
Closing speed		350-650mm/sec	350-650mm/sec*2
Opening speed		350-650mm/sec	350-650mm/sec*2
Opening hours		0.1s-0.9s Adjustable	
Security features		Met an obstacle stops immediately, when the door opening and closing	
Manual door closers		≤ 3.5kg	
Power supply voltage		220V+10%50/60HZ	
Power		75W	
Electronic controller		32 bit microcomputer treatment plant controller	
Motor		DC motors	
Function Selection		Automatic status, Closed lock, Keep opening status, Banned come in status, Manually adjustable open time, Anti-gripping, wind-proof, barrier function	
Door specifications	Width coefficient	1000 1100 1200 1300 1400 1500 1600	
	Height coefficient	2000 2050 2100 2150	

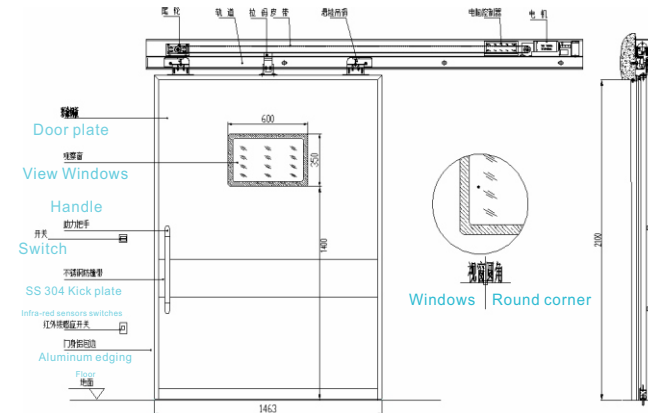