





**Have it your way – AME Planters with options you demand**



### **A-M-E Twin Row Unit- 8”**



A-M-E is pleased to introduce the innovative 8” Twin Row Planter. This unit can be set up on 20” or 30” centers or anywhere in-between. Both Row Units are set on a single parallelogram for strength and simplicity. When unit is used on 20” centers you’re effectively planting 8”-12”-8” pattern. When unit is used on 30” centers you’re effectively planting 8”-22”-8” pattern. Additional and considerable savings are gained by use of a single down pressure system and single row cleaner per twin row. This translates in some cases to over \$35,000 in savings on 60’ toolbars.

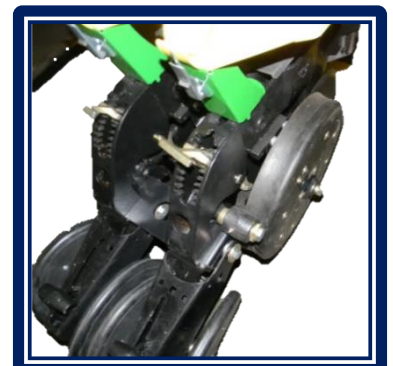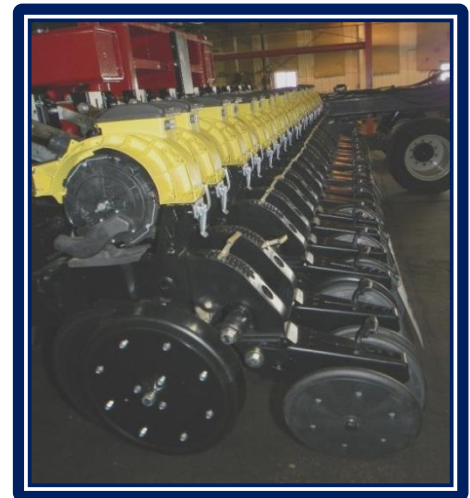



AMERICAN MADE EQUIPMENT 1501 21<sup>ST</sup> ST ELDORA, IOWA-50627 USA  
Phone: +1-515-650-3911 E-mail : [ame@A-M-E.co](mailto:ame@A-M-E.co) Web : [www.A-M-E.co](http://www.A-M-E.co)






## Single Down Force per Twin

Since both 8" twin row meters are carried on the same parallelogram you only need to use one Precision Planting Delta Down Force or Air Force per twin row. This applies for any down pressure system that you may want to choose for your planter.

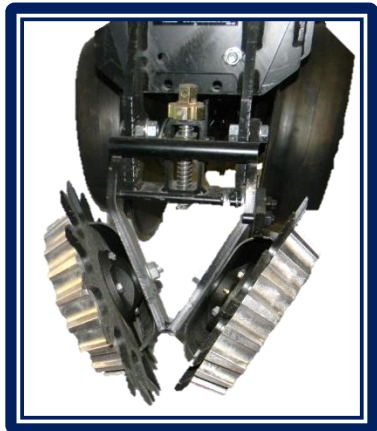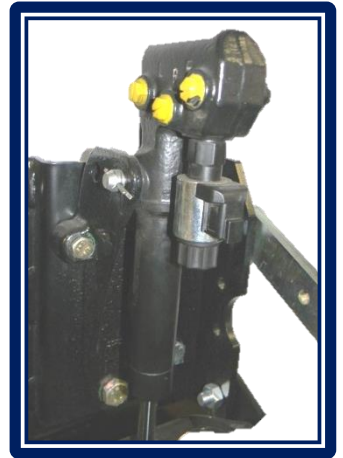

## Single Row Cleaner per Twin

The same principle applies to row cleaners since a single cleaner is utilized for both rows. Our face plate mounting is universal and you can choose a row cleaner of your choice. If you choose clean sweep then only one sweep is required per two rows. Additionally the same principle applies for dry or liquid fertilizer option- one opener per twin row.

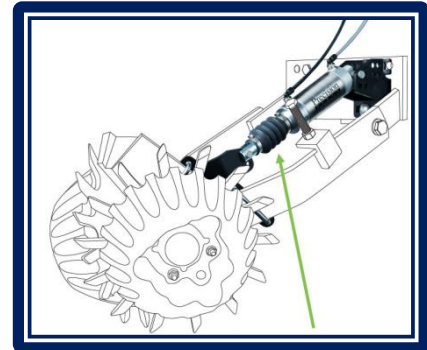

## Electric vSet Drives

We utilize Precision Planting vSet electric drive meters and they only require a single SRM for operation of both units. On 20" centers we recommend using 2.5" depth gauge wheels. On 30" centers standard 4.5" depth gauge wheels can be used. All of our twin row units utilize only outboard depth gauge wheels, therefore allowing plenty of trash clearance in between twin 8" rows.



## Choice of Closing Wheels

Our standard Twin Row units are equipped with four rubber V closing wheels with two inner ones set 3/4 inch lower than outboard closing wheels, allowing us more accurate soil to seed contact. As an option we also have available CNH style twin wide rubber closing wheels especially for sandier or lighter soil conditions.

