

Bare Fiber Reels



Standard Features

Small Reel Packaging
(120mm x 51mm)

Available in 250 μm and 900 μm

Max length of fiber on reel:

250 μm = 4,000 meters



900 μm = 250 meters

**Longer lengths available but come on larger production reels*

Fiber Types:

Single-mode	Multimode
G.652.D	OM1
G.655	OM2
G.657.A1	OM3
	OM4

3C Dynamics Bare Fiber Reels are packaged for people who have a need for quality raw fiber but don't require the quantities necessary to do business with fiber manufacturers. Uses include, testing, training, experimentation, component builds etc.

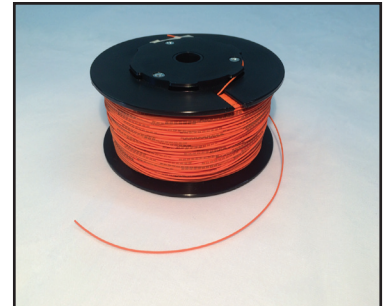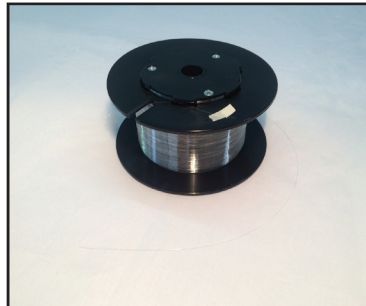

Ordering Information

BFR - □□□□ - □ - □□
 1 **2** **3**

1 Select Total Fiber Length
(100 – 4000) meters

Example:

0100 = 100 meters

3000 = 3000 meters

** 4000 meters (250 μm) and 250 meters (900 μm) maximum length on 120mm x 51mm reel.*

*** Custom quotes available based on fiber length and volume.*

2 Select Fiber Type

Multimode

3 = 62.5 μm (OM1)

4 = 50 μm (OM2)

5 = 50 μm (OM3)

6 = 50 μm (OM4)

Single-mode

S = G.652.D (Standard Single-mode)

N = G.655 (NZDSF)

B = G.657.A1 (Bend Insensitive)

3 Coating Diameter

25 = 250 μm

90 = 900 μm

3C Dynamics - 120 Water Tank Rd. - Statesville, NC 28677

Inquiries: 980-635-1213 - Fax: 980-635-1223

Email: CustomerService@3CDynamics.com - www.3CDynamics.com