


INSTALLING YOUR UNSLINGIT HARNESS



1. Your UnslingIt harness will be most comfortable when mounted on your backpack straps near the height indicated by the line shown in the photo. This location ensures the harness stays on your backpack straps and does not interfere with your shoulders or arms.

NOTE: If this position doesn't work for you, try attaching the harness to the carry handle at the top of the pack. If you choose that position, put the retainer straps (see page 3) near the red line area to keep the harness out of your way.

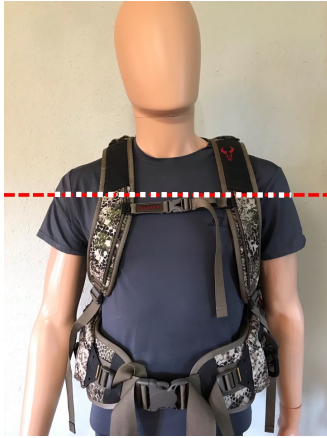

2. To install your harness, place the loop of the harness behind your pack strap and loop the harness through the loop as shown.

After this step, you are going to pull the harness through the loop until it is tightened around the strap and the harness pad is all the way through the loop.

NOTE: This step may require you to pinch or squeeze your strap together to allow the harness to get past the woven pad on the harness (see next photo)



**Woven
Shoulder Pad**

3. You will know that your harness is installed correctly when the woven pad is pulled all the way through the loop. This prevents the harness from loosening on the pack strap.



Now simply do the same thing on the other pack strap and you are ready to go!

Experiment with your rifle and find the carry that works best for you. Barrel up, barrel down, it's all up to you.

INSTALLING FIREARM CONNECTORS



1. Place the firearm connectors over the top of your firearm with the loops going around the sling swivels, then slide the sliding knots towards the swivels to lock it on.. NOTE: Only the rear stock connector has an extra sliding knot to tighten the connector to the stock

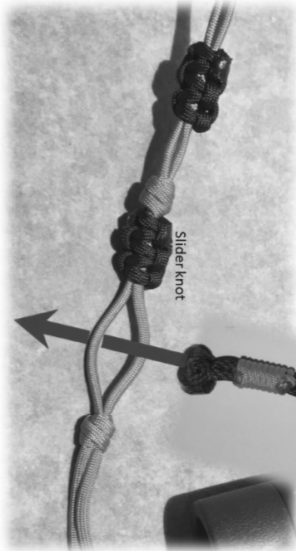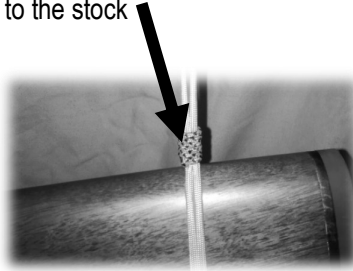

2. Connect to the harness by placing the rifle connector knot over a stationary knot and below a sliding knot. Then simply slide the slider knot down to lock the connector onto the harness.

Bottom of
harness

3. Please note that the above picture shows the connector being attached to the harness without the firearm. This is only done to clearly show how it attaches. You should attach the connector to the firearm as shown in step 1 before attaching to the harness.

USING YOUR HARNESS RETAINERS



1. Your UnslingIt system comes with 2 little do-hickeys that look like the picture. They are shoulder strap retainers and are designed to keep your harness aligned with your pack straps if you need to attach the harness to the packs carry handle (see last picture on this page for example).



2. The retainers are designed with 2 options for tightening around your shoulder strap as shown here.

NOTE: You may not need to use these retainers at all. If you do not want to install them, no problem!



UnslingIt harness attached to carry handle of pack



3. If you want to install the retainer(s), choose a position as high as possible that still keeps the UnslingIt aligned with your packs strap.

NOTE: You may find that you do not need any retainers or you may choose to use only one or both. Total freedom!

USING YOUR UNSLINGIT J-HOOKS



1. Your Unslingit harness with J-Hooks will work best if you have the rear stock J-hook one spot lower than the forestock J-hook as shown in the picture. There are 7 connection points on each side, so you can raise or lower your firearm to suit your preference

NOTE: Placing the rear stock J-hook just behind the trigger guard provides the best balance point for carrying your firearm and placing equal weight on your packs shoulder straps.



Sliding knot

2. To install your J-hooks, put the large knot at the top of the J-hook between the 2 strands of the harness. The J-hook knot should be above a stationary knot and below a slider knot

Stationary knot



3. Once your J-hook is in position, simply slide down the sliding knot as shown and do the same for the other J-hook. They are now locked on and ready to go hunting!