

MINIATURE General Purpose Filters

FD50 Models
Port Sizes: 1/8, 1/4



Model Shown: FD50-2

SPECIFICATIONS

Ambient/Media Temperature:

Plastic bowl: 40° to 125°F (4° to 52°C).

Metal bowl: 40° to 150°F (4° to 66°C).

Body: Aluminum.

Bowl: 2-Ounce (60-ml) capacity polycarbonate plastic; optional aluminum bowl.

Bowl Drain:

Internal automatic drain; optional manual drain.

Filter Element: 5-μm-rated polyethylene; optional 5-μm, 20-μm, or 40-μm sintered bronze.

Fluid Media: Compressed air.

Inlet Pressure:


15 psig (1 bar) minimum with automatic drain.

Plastic bowl: 150 psig (10 bar) maximum.

Metal bowl: 200 psig (14 bar) maximum.



Seals: Nitrile.

FLOW CHART

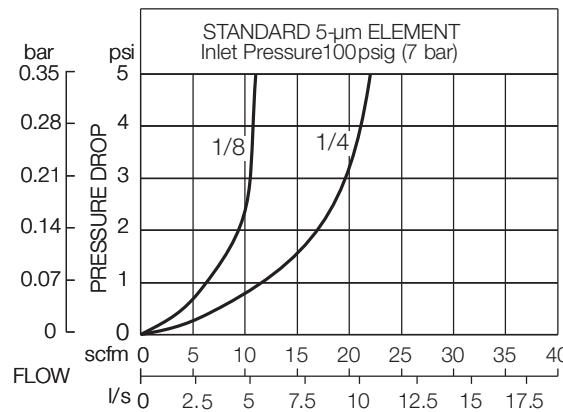

DIMENSIONS inches (mm)

Bowl	Ports	A	B	C	Weight	
					Depth	Ib (kg)
Plastic	1/8, 1/4	1.6 (41)	3.9 (99)	0.4 (9.5)	1.6 (41)	0.33 (0.15)
Metal	1/8, 1/4	1.6 (41)	4.3 (109)	0.4 (9.5)	1.6 (41)	0.35 (0.16)

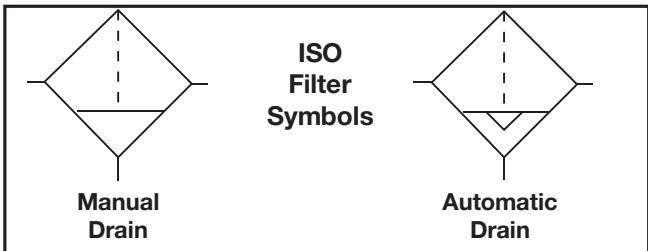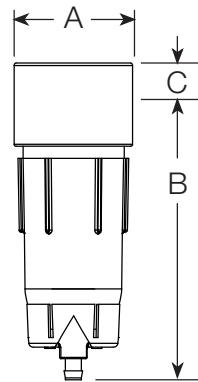

REPLACEMENT FILTER ELEMENT KITS

Element Type	Kit Number
5-µm polyethylene (Std element).....	KA130-27PE5
5-µm bronze	KA130-27E5
20-µm bronze	KA130-27E4
40-µm bronze	KA130-27E3

ORDERING INFORMATION

Change the letters in the sample model number below to specify the filter you want.

BOWL TYPE	B	FD	50 - 2	T
Plastic bowl	Leave Blank			
Metal bowl	B			
BOWL DRAIN				
Internal automatic drain	FD			
Manual drain	F			
PORT SIZE				
1/8 NPTF	1			
1/4 NPTF	2			

Y	W
L	PORT TYPE
As specified in INLET PORT Leave Blank	
BSPP threads on both ports W	
OPTIONS (More than one option can be chosen. Add in alphabetical order.)	
None Leave Blank	
Polyethylene filter element:	
5-µm rating Leave Blank	
Bronze filter element:	
5-µm rating E5	
20-µm rating E4	
40-µm rating E3	
No Drain (<i>lubricator bowl</i>) LDC	
Use manual drain option under BOWL DRAIN SECTION as well.	
Tapped modified head to allow... T	
50-01 bracket assembly.	