


ZGFK Greifzylinder kurz mit externen Schlitten

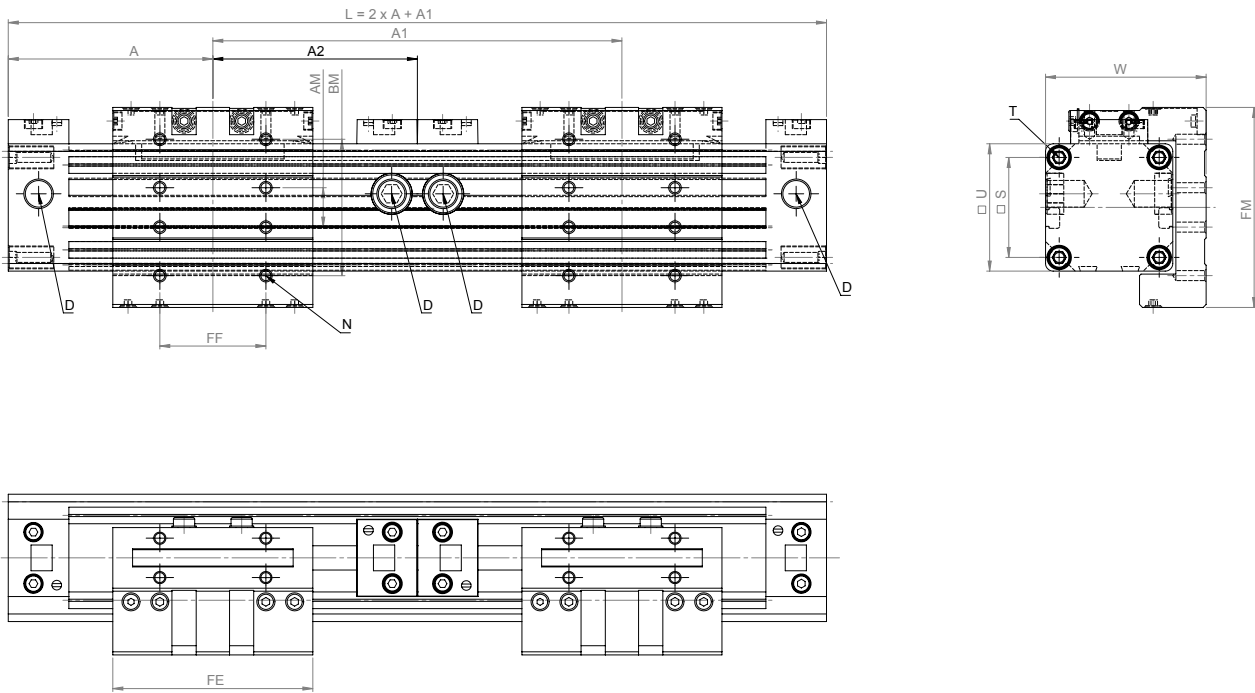

Measurements table

Maßtabelle

Piston-Ø Kolben-Ø	Ø 18 mm	Ø 25 mm	Ø 32 mm	Ø 40 mm	Ø 50 mm	Ø 63 mm
A	57,5	67,5	77,5	95	105	125
A1 at least A1 min.	115	135	155	190	210	250
A2	A2 = A + Stroke Hub					
AM	10	13	16	22	29	40
BM	35	45	55	70	85	105
D x thread depth D x Gewindetiefe	M5 x 6 mm	G1/8" x 8 mm	G1/8" x 8 mm	G1/4" x 12 mm	G1/4" x 12 mm	G3/8" x 12 mm
FE	58	66	86	110	130	153
FF	30	35	55	70	70	100
FM	50	66	80	97	116	136
L	L = 2 x A + A1					
N x thread depth N x Gewindetiefe	M3 x 6 mm	M4 x 7 mm	M5 x 9 mm	M6 x 10 mm	M8 x 12 mm	M8 x 15 mm
S	23,5	33	41	51	63	78
T x thread depth T x Gewindetiefe	M3 x 7 mm	M4 x 9 mm	M5 x 10 mm	M6 x 12 mm	M8 x 12 mm	M8 x 12 mm
U	30	42	52	63	78	93
W	39	53	65	79	96	113,5
Cushioning length Dämpfungsweg	15	18	24	34	40	49

Example for order:  
ZGFK Ø 25 Gripping cylinder short with external carriages  
distance A1 400 mm with stroke 100 mm

Bestellbeispiel:  
ZGFK Ø 25 Greifzylinder kurz mit externen Schlitten  
Abstand A1 400 mm mit Hub 100 mm

Order number Bestellnummer

5	2	5	4	-	0	4	0	0	-	0	1	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---