

## Micro lubricator | BGO



Image shows:  
92500.CC00



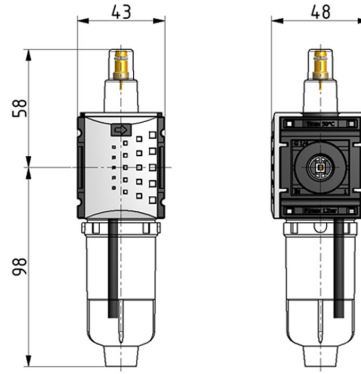


Image shows:  
92500.CC00


### flow characteristic



### lubricator operating limit



### symbol



### technical data

**description:** micro lubricator  
**medium:** compressed air, neutral gases  
**supply pressure P1 max.:** 12 bar  
**temperature range:** -10°C - +50°C  
**bowl:** PC  
**mounting:** vertical  
**bowl volume lubricator:** 35 cm<sup>3</sup>  
**oil type:** CL 32 DIN 51517 - ISO VG 32  
**dome assembly:** PC  
**oil fill in:** cannot be filled with oil during operation

### accessories



mounting bracket:  
[KBW.Q-1225](#)



coupling kit wall mounting:  
[KKOP.QW](#)

type	part-number	description
KLUB-014	92500.CC00	Micro lubricator G1/4 with PC bowl
KLUB-014 M	92500.CC50	Micro lubricator G1/4 with metal bowl

Service 3 unit

Service 2 unit

Filter regulator

Filter

Pressure regulator

Lubricator

System extensions

Accessories

Special products