



Experience the
EZ Grout
Advantage



Mud Hog® Mixers

Since 1998, EZ Grout has been a leading equipment manufacturer to the masonry and concrete construction markets. EZ Grout products, well known for groundbreaking, labor-friendly designs and high quality standards, are in use nationwide and abroad.

Patent #7,165,877

The most durable, best designed mixer on the market! Triple Use: Mortar, Grout, and Concrete

5/16" thick steel rolled drum and 3/8" thick steel drum ends

11 HP Honda engine with electric start (optional diesel engine or electric motor available)

Hydraulic drive, hydraulic dump

Portability – Fork pockets accessible on all sides

Compacts to fit in standard 8 ft. (2.44 m) truck bed

Six reversible mixing paddles to decrease batch time; one-year warranty on rubber blades

Large capacity – 6 to 7 bags or 20 cu. ft. (.57 cu. m). Will mix up to 3/4 cubic yards of concrete aggregate

Adjustable height – loads below waist for reduced fatigue

No wheels to work around or maintain; deters theft



The 20 C.F. Mud Hog Model MH20

UNIQUE OVER CENTER DUMP!

- 3 to 4 bag capacity or 12 cu. ft. (.34 cu. m)
- Will mix up to 1" (2.54 cm) concrete aggregate
- Reversible mixing paddles prevent clogging
- Vertical mixing paddles prevents splashing; cut through material
- Reduced labor fatigue - mixer loads below waist and still dumps high
- Fork Pockets accessible from all sides
- 11 hp Honda® engine with electric start
- Rubber blades with full one year warranty
- Hydraulic dump and drive
- Optional diesel engine or electric motor available



Model MH12

Shown with optional axle kit for towing

The choice of the professional mason

High Rise Mud Hog® Kit

Need to mix mortar on upper floors?

- Mobile mixing station doesn't require forklift to move
- Lower jacks to move to precise location to mix mortar as needed, where needed.
- Eliminates laborers from transporting batches of mortar; saves time and labor costs
- Easily transported through elevators or hook hoist
- Empty weight: 1,800 lbs. (816.5 kg)
- Caster kit easily attaches in the field or comes factory installed



Model MH12 shown with optional HMA-A-1 High Rise Conversion Kit

CONTROL JOBSITE DUST!

Optional solid grate (for 12 and 20 cu. ft. models) eliminates dust



The Mud Hog® that's ideal for small jobs!

- 2 to 3 bag capacity or 9 cu. ft. (.25 cu. m)
- Will mix up to 1" (2.54 cm) aggregate
- Hydraulic dump and drive
- Reversible mixing paddles prevent clogging
- Loads below waist level and dumps high to lessen backaches
- Highway tires and torsion axle for smoother suspension; tow package is designed to pull from the side so that wheels are out of the way of wheelbarrow or the forks on a forklift
- Easier to back into sand pile
- 8 HP Honda engine
- Empty weight 1325 lbs. (601.01 kg)
- Optional brake and light kit



The 9 C.F. Mud Hog Model MH9

EZG7 • EZG9 • EZG12

EZG9

Shown Here



- 4" x 6" Rectangular Structural Tubing
- 10 Gauge Steel Hood
- 1/4" Paddles with 1" Solid Square Bar
- 2" Schedule 80 Tongue
- 1 1/4" Solid Steel Shaft
- 1/2" Round Rod Grating
- 13" 6 Ply Tires
- 2" Removable Axle



EZG7



EZG9



EZG12


Shown Here

Product Specifications

Model	EZG7	EZG9	EZG12
Capacity - ft ³ (L)	7.0	9.0	12.0
Capacity - Bags	1 1/2 to 2	2 to 3	3 to 4
Power Source*	Honda GX240 7.9HP(5.6kw)	Honda GX240 7.9HP(5.6kw)	Honda GX390 11.7HP(8.7kw)
Engine Starting	Manual Recoil	Manual Recoil	Manual Recoil
Drum Thickness	3/16"	1/4"	1/4"
Forklift Pockets	Standard	Standard	Standard
Discharge Height	22"	20"	20"
Load Height	49"	56"	56"
Dump Action	Manual	Manual	Manual
Drive System	Chain	Chain	Chain
Dimensions	70" L x 47" W x 60" H 104" L w/tongue 70" H w/dump handle	73" L x 47" W x 67" H 107" L w/tongue 77" H w/dump handle	76" L x 47" W x 67" H 110" L w/tongue 77" H w/dump handle
Weight	750lbs (340.9kg)	1000lbs (453.6kg)	1231lbs (550.2kg)

Mud Hog®

Refractory/Dry Cast Mixers

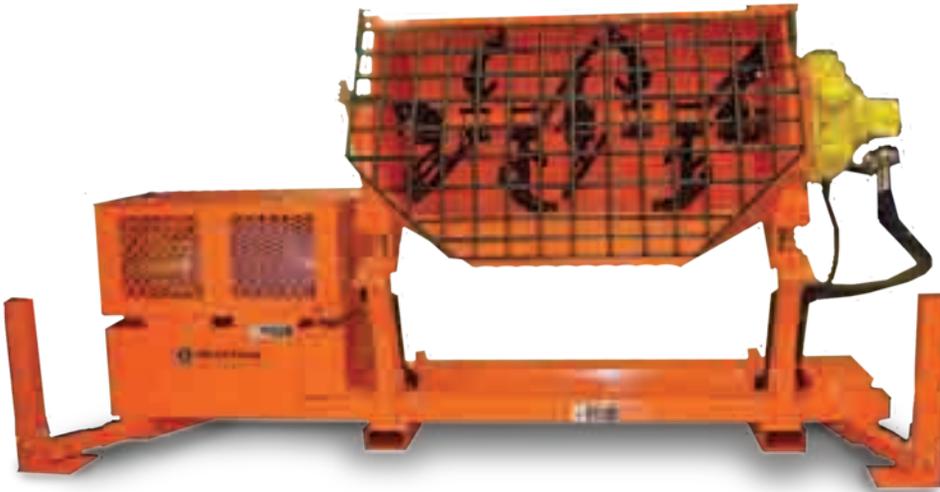

RMH 29

- Capacity: 2000 lbs. refractory
- 40 HP 3-phase electric motor.
- 35 gallon hydraulic reservoir.
- Hydraulic drive and dump.
- Adjustable height.
- High dump; can be set up to dump into pump.
- Great for bulk bags.
- Patented rubber blades provide longer wear.
- Portability; fork pockets accessible on all sides.

RMH 20

- Capacity: 1000 lbs. refractory
- 20 HP 3-phase electric motor.
- Adjustable height.
- 30 gallon hydraulic reservoir.
- 6 mixing blades to decrease batch time.
- Hydraulic drive and dump.



All mixers come standard with variable speed control for paddles and hardened steel wear liners for drums!



RMH 12

- Capacity: 500 lbs. refractory
- Loads below waist and dumps high.
- 10 HP single or 3-phase electric or GX390 Honda motor.
- Mix up to 3/4" aggregate.
- Hydraulic drive and dump.
- Optional wheel kit available.
- Steel paddle blades are available.

**RMH36 3000 lb. mixer
also available**

EZGR Refractory Mixer/Pump



Specifications

Maximum face pressure (psi)	1800
Pump cylinder stroke (Inches)	18"
Minimum concrete slump range (Inches)	2"
S-Tube discharge diameter (Inches)	3"
Theoretical concrete output (C.Y.P.H.)	6 – 10
Maximum Aggregate	½' minus
Mixer Capacity Volume	14 c.f.
Refractory Mixer Capacity	1000 lbs.
Agitator Hopper capacity (Cu. Ft.)	8 c.f.
Hopper height (Inches)	41"
Fuel capacity (Gal.)	20
Mitsubishi Diesel Engine (HP)	80
Axels	2
Tire Size	15"
Length	125"
Width	70"
Height (Top of hood)	58"
Weight (lbs)	5500

The specifications contained herein were in effect at the time of printing. In keeping with a policy of continual improvement, EZG Manufacturing reserves the right to change and modify the design, price or specifications of the equipment above, without notice and without incurring obligations.

EZ Grout Pump



The ultimate mix of power, strength, and dependability to make the best grout pump on the market. The safety of an S-valve (fully reversible), designed to clean easily after you pump grout, pearock, 3/4" structural material, or shotcrete. A 30 hp deisel engine that cranks out 20 yd³/hour. The Hog Logo that tells you its built tough enough to last.

Specifications

Volume	20 yd ³ /hr
Max. Aggregate Size	3/4"
Piston Face PSI	650
Bore	4"
Stroke	30"
Slump Range - Minimum	2"
S-Tube Inlet & Discharge	4"
Hopper Capacity	8ft ³
Verticle Pumping Distance*	200'
Horizontal Pumping Distance*	400'
Fuel Capacity	20 gallons
Dielsel - HP	30
L x W	150" x 64"
Weight	3000 lbs

**Distances serve as a guide only*

Material Delivery Systems

Uphill Grout Hog with new extended auger tube



Model UGPH75

- Makes grouting from the scaffold side of the wall easier.
- Will handle up to 1/2" (1.27 cm) aggregate with virtually no plugging.
- Unloads 3/4 cubic yards in 2 1/2 minutes
- Removable auger and hopper tilt allows for 15 minute clean up.
- Extended auger tube saves several feet of boom extension on your forklift.
- Decreased head height allows pouring up close to bar joist on interior walls.
- Unique swivel base allows grouting from all angles while eliminating extra forklift moves.
- Remote cable control operation (forward and reverse); optional wirelss remote

Patent #6,112,955
#6,206,249, #RE37,911E,
#6,499,718 and #7,152,762



Model UGPHC75
Shown here with optional gas
power and crane bail.



Extended auger tube saves several
feet of boom extension



Hopper tilt allows for easy cleanup

Hydraulic Powered Grout Hog®

- Hooks to auxiliary hydraulics of forklift
- Unloads 3/4 cu. yd. (.57 cu. m) in approx. 2 1/2 minutes
- Also delivers sand and dry materials
- Unique swivel-base system allows workers to reach 17 ft. (5.2 m) of wall quickly without moving forklift
- 8' (2.44 m) reinforced, collapsible dispensing hose standard; 4' (1.22 m) hose also available
- Empty weight: 985 lbs. (447 kg)

Patent #6,112,955
#6,206,249, #RE37,911E,
#6,499,718 and #7,152,762



**Model
GH75**

Ergonomic Design –
labor doesn't lift or
support weight of grout

Gas Powered Grout Hog®

with Crane Bail

- Built for use with crane or forklift
- 3/4 cu. yd. (.57 cu. m) capacity
- Unloads 3/4 yard in 2 1/2 minutes
- Can be operated with one man on scaffold and one crane operator
- Ideal for steps, interior walls, high rise construction, piers, columns, and small concrete pours
- Remote cable control operation (forward and reverse); optional wireless remote
- Honda® 11 hp engine
- 10 gpm, 1350 psi hydraulic pump and motor drive
- Empty weight: 1436 lbs. (651.4 kg) (Weight with crane bail: 1525 lbs. (691.7 kg))



Model GPHC75


Hog Crusher Job Site Material Recycler

The affordable way to keep your job site cleaner, safer and environmentally friendly.

The new Hog Crusher Job Site Material Recycler easily attaches to your skid steer loader or forklift to become an on-the-spot recycling center at your job site. It can recycle most materials – brick, block, stone, rock, asphalt, non-reinforced concrete up to four inches thick and more.

- Crushes material down to two inches or smaller
- Up to ten tons per hour discharge rate
- Replaceable carbide bits, hardened breaker, cleaner and cheek plates – easy on-site maintenance
- Heavy plate reinforced construction
- One-half yard hopper capacity
- 24" long crushing rotor
- Built-in forklift pockets

LxWxH	64 1/2" x 30 1/4" x 42"
Empty Weight	1,600 lb.
Hydraulic	Min: 15 gal @ 3,000 psi Max: 25 gal @ 3,500 psi

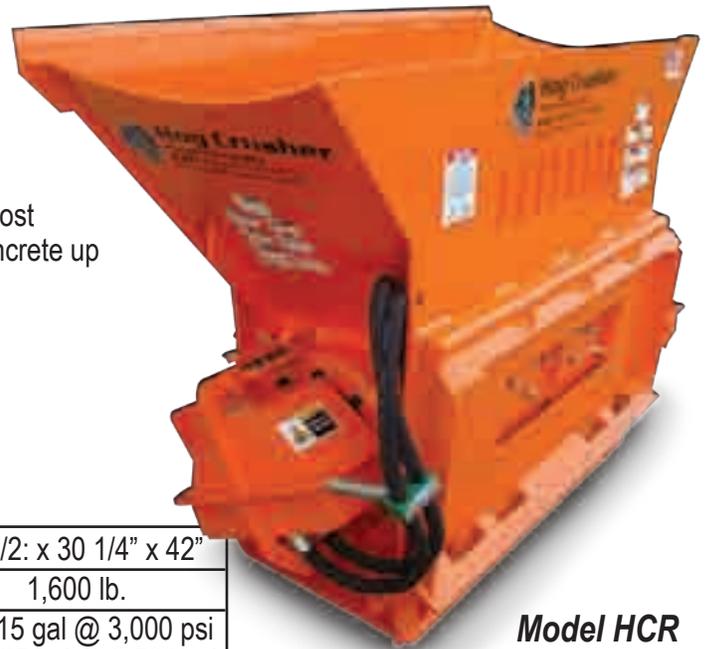

Model HCR



Scoop up recyclable material.



Level Hog Crusher and start recycle process.



Powerful Hog Crusher pulverizes debris in minutes.



Stop paying to have recyclable debris removed from job site.

The Prec

for precision placement



Electric Powered



*Shown in use at Tankersley Concrete Co.
Lewisburg, Tennessee.*



*Shown in use at DiCicco Concrete Co.
Chicago Heights, Illinois.*

- Drastically cuts Vibrating and placement time
- Less raking and shoveling
- 4 to 5 slump - no problem
- Sizes up to 3 cubic yards
- Easily work around rebar and outlets
- Removable auger - easy cleanup
- Moves easily from point to point
- Labor savings and increased production
- Available with forklift pockets and/or crane bail
- Less mess and less waste = MORE PROFIT

Precast Hog™

Control and flow control.

"Anyone knows when you open up a pouring bucket you cant always get it closed. That's no problem with the Precast Hog. Controlling the flow of concrete is one of the Precast Hog's best features.. I would recommend this product to anyone and HAVE recommended it to other precasters. I'm planning on purchasing another one! Kirby O' Malley - Garden State Precast



Hydraulic Powered



3 Yard Gas Powered



PUGH75 w/10HP Power Supply

Hog Leg® Wall Brace System

- Works on any type block
- Adjusts to any height wall
- Lightweight – heaviest piece weighs only 38 lbs. (17.24 kg)
- Kicker extension can be used for extra stability
- Makes your jobsite safer and more productive
- Fastens through the head joints (no cutting of block required or anchor bolts to purchase)
- Includes convenient lockable storage rack to store all materials; fits in 8 ft. (2.438 m) bed; avoids theft



HL400KIT Hog Leg Brace Kit



Installs easily through head joint



Same brackets attach at anchor location



Hog Leg® without kicker



Hog Leg® with kicker



HL14 Ext. Kit

Range of Brace Height	Range of Brace Length	No. of 7' Hog Leg extensions used	No. of 14' Hog Leg extensions used	No. of Braces	Linear Ft. of Wall
HL400 Hog Leg Brace Kit Only					
5'-10" to 10'-4"	7'-2" to 12'-8"	2	N/A	32	400 ft.
11'-0" to 19'-8"	13'-6" to 18'-9"	3	N/A	21	250 ft.
11'-5" to 20'-3"	14'-0" to 24'-9"	4	N/A	16	200 ft.
16'-5" to 25'-3"	19'-6" to 30'-10"	5	N/A	12	150 ft.
HL400 Hog Leg Kit and (1) HL14 Ext. Kit					
11'-11" to 16'-6"	14'-11" to 20'-8"	1	1	32	400 ft.
12'-4" to 21'-4"	15'-5" to 26'-9"	2	1	32	400 ft.
HL400 Hog Leg Kit and (2) HL14 Ext. Kit					
17'-1" to 26'-11"	21'-4" to 33'-8"	1	2	32	400 ft.
23'-6" to 31'-9"	29'-4" to 39'-9"	2	2	32	400 ft.

"Now that we have the Hog Leg braces, we are more confident and feel more secure that we will be able to bid and build higher work. With its ease of installation, I was able to train my crews in about 15 minutes on how to use it and also train the foreman on the instruction manual in about 30 minutes."

Brian Tibbetts,
Illinois Masonry
Corporation
Lake Zurich, Illinois

No more heavy, time consuming wall braces!

Masonry Accessories

Poly Hog Trough®

- 10 cu. ft. (.28 cu. m) capacity
- Made of tough nonstick polyethylene – resists dents or damage; can be cleaned in minutes
- Will not crack in cold weather
- Steel legs for use without pallets; casters and crane hoist options available
- One year warranty
- Lightweight, only 60 lbs. (27.2 kg); weight with wheels - 82 lbs. (37.2 kg); weight with crane options - 110 lbs. (49.8 kg)



Model HTP10



Model HTP10W

Shown here with optional wheels



Large 10 cu. ft. capacity

Steel legs, no pallets needed



Shown with optional HTP10C-A-1 Crane Bail Assembly with Clevis (straps not included)

Hog Cart™

Easy movement of block or grout



Model HTP10
Hog Trough



Model HC

- Use with Hog Trough (sold separately) or for transporting masonry block
- Eliminates the need for wheels on your mudpan
- No more broken wheels on your mud pans
- Forklift pockets
- 3,000 lb (1,361 kg) capacity
- Safety brakes
- Constructed with durable, high quality wheels
- Built to withstand the rugged jobsite
- Corner pockets allow 2" x 4" (5.08 cm x 10.16 cm) handles to be used


Efficiency goes one step further!

Booger Hog®

Masonry Wall Scrubber



Model BOHO

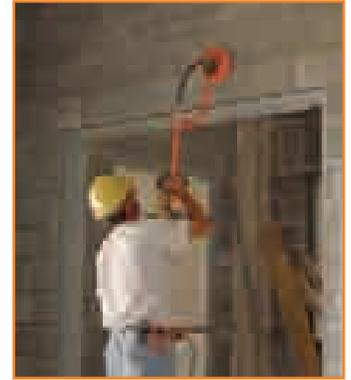

- Booger Hog® can do the work of 4 to 5 men – save money on decreased punch out time with less labor
- Quicker, easier wall cleanup
- Disc Guard allows better cleaning around corners and door frames
- Includes 5.5A Milwaukee Drill
- Weighs just 22 lb. (10 kg) including disc
- 5/16" (.79 cm) diameter steel drive shaft
- Tight fitting aluminum disc guard allows better cleaning around corners and door frames
- Durable – pivot on head with self-lubricating bronze bushings and a felt seal; swivel has a grease fitting for lubrication and rubber lip seal.
- Easy to service – two grease fittings; drill motor is easily replaced if required. Motor brushes on drill are accessible without disassembly.



Hog Slopper™

Metering System Attachment

PREMEASURES YOUR MATERIAL FOR CONSISTENT MIX DESIGN



Eliminates guessing based on shovel size or miscounts



Save thousands on labor by no shoveling

- Premeasures the amount of sand to put in mortar mix
- Premeasures the amount of peagravel and sand if you are mixing grout
- Delivers 69 shovels in seconds – enough sand for 3 bags of mortar or cement
- Insures consistency of workable mortar for improved production
- Eliminates guessing volume of sand based on shovel size or miscounts
- Helps avoid back strain
- Improves batch time – while mortar is mixing, Hog Slopper™ is filled and ready for next batch
- Keeps sand pile away from mixer
- Adjustable from 6 3/4 cu. ft. (.19 cu. m) to 9 cu. ft. (.25 cu. m) of sand
- Available with fork pockets or universal skid steer mount

Specifications

Model	SHB	SHF
Description	Sand Hog Bucket (Bobcat)	Sand Hog Bucket (Forklift)
Dimensions LxWxH in.	41 x 36 x 24	29 x 32 x 21
Weight lb. (kg)	260 (117.9)	28 (126.9)

Hoist Hog™

Material Containment Cage



**Available
for brick
or block**

63" length x 36" width x 62" height

Lifting Material just got easier! No worry....No Falling Debris



Lower cage over materials



Install support bars



Lift to your location



Open gate & wheel out materials

Product - Specifications

Mud Hog Mixers

Model	MH9	MH9F	MH12	MH12DIESEL	MH20	MH20DIESEL
Capacity – ft ³ (L)	9.0	9.0	12	12	20	20
Capacity – Bags	2 to 3	2 to 3	3 to 4	3 to 4	6 to 7	6 to 7
Power Source*	Honda GX270 8.5 HP (6.3kw)	Honda GX270 8.5 HP (6.3kw)	Honda GX390 11.7 HP (8.7kw)	Kubota OC95 9.5 HP (7.0kw)	Honda GX390 11.7 HP (8.7kw)	Kubota OC95 9.5 HP (7.0kw)
Engine Starting	Manual Recoil	Manual Recoil	Recoil/Electric	Recoil/Electric	Recoil/Electric	Recoil/Electric
Aggregate Size in. (cm)	1 (2.54)	1 (2.54)	1 (2.54)	1 (2.54)	1 (2.54)	1 (2.54)
Drum Thickness in.	1/4	1/4	End 3/8; Wrap 1/4	End 3/8; Wrap 1/4	End 3/8; Wrap 5/16	End 3/8; Wrap 5/16
Skid Mount	N/A	Standard	Standard (Optional Axle)	Standard (Optional Axle)	Standard	Standard
Forklift Pockets	N/A	Standard	Standard	Standard	Standard	Standard
Dimensions L x W x H in.	94 x 33.5 x 43.5	76x 33.5 x 43.5	82 x 42 x 49.5	82 x 42 x 49.5	96 x 44 x 53	96 x 44 x 53
Adjustable Discharge Height in.	Up to 26	Up to 26	Up to 49	Up to 49	Up to 51	Up to 51
Drive System	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Dump Action	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Empty Weight lb. (kg)	1325 (601)	1225 (556)	1695 (768.8)	1795 (815.9)	2295 (1041)	2395 (1088)
Gross Weight lb. (kg)	2675 (1213.4)	2575 (1170.4)	3495 (1588)	3595 (1634)	5295 (2406)	5395 (2447)

Mobile Mud Hog Mixers

Model	MMH4	MMH9	MMH12
Capacity – ft ³ (L)	4.0	9.0	12
Capacity – Bags	1 to 1.5	2 to 3	3 to 4
Power Source	Auxillary	Auxillary	Auxillary
Aggregate Size in. (cm)	1 (2.54)	1 (2.54)	1 (2.54)
Drum Thickness in.	3/16	1/4	1/4
Skid Mount	Standard	Standard	Standard
Forklift Pockets	Standard	Standard	Standard
Dimensions L x W x H in.	29 x 44 x 29	55 x 33 x 42	66 x 40 x 44.5
Drive System	Hydraulic	Hydraulic	Hydraulic
Dump Action	Manual Gate	Manual Gate	Hydraulic Gate
Empty Weight lb. (kg)	350 (159)	600 (272)	1000 (454)
Gross Weight lb. (kg)	950 (431)	1950 (885)	2880 (1306)
Hydraulic Flow Rate Min.	4 gpm @ 2000 psi.	4 gpm @ 2000 psi.	4 gpm @ 2000 psi.
Hydraulic Flow Rate Max.	16 gpm @ 3000 psi.	26 gpm @ 3000 psi.	40 gpm @ 3000 psi.
Material Discharge yd. ³ /min.	1/2	1/2	1/2

Mixer Optional Accessories

Model	Description
MH9LIGHTKIT	Tail Light Kit, Model MH9
MHLIGHTKIT	Tail Light Kit, Models MH12 & MH20
MH12AXLE	Axle Installation Kit, Model MH12
FH-A-9	Backing Plate Universal Skid Steer Model MMH9 and MMH4
FHW-A-9	Backing Plate Walk Behind Skid Steer Model MMH9 and MMH4
FHW-A-10	Backing Plate Bobcat MT Series Skid Steer Model MMH9 and MMH4
MH12-A-1	Dust Cover, solid grate, MH12
MH-A-69	Dust Cover, solid grate, MH20
HMH-A-1	High Rise Conversion Kit, MH12

* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. EZ Grout Corp. and its subsidiary companies make no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

All features and specifications are subject to change without notice.
EZG488 Rev. B (05-10)

Product - Specifications

Booger Hog Masonry Wall Scrubber

Model	BOHO
Machine Weight	22 lb. (10 kg) (Shipping weight: 25 lb. (11.3 kg))
Dimensions LxWxH in. (cm)	63.5 x 15 x 13 (161 x 38 x 33)
Power	110V, 1Ø, 5.5 amp
Grinding Disc	7 inch diameter, diamond

Poly Hog Trough *Optional Attachment: HTP10C-A-1 – Crane Bail Assembly with Clevis (fitting straps not included)*

Model	HTP10	HTP10W	HTP10C
Description	Poly Hog Trough	Poly Hog Trough with Wheels	Poly Hog Trough with Crane Bail
Capacity	10	10	10
Max. Weight Capacity lb.	3000	3000	3000
Dimensions LxWxH in.	57 x 28 x 24	57 x 28 x 29	62 x 28 x 24
Weight lb. (kg)	60 (27.2)	82 (37.2)	110 (49.8)

Hog Cart

Model	HC
Max. Weight Capacity lb.	3000
Dimensions LxWxH in. (cm)	61 x 26.5 x 13
Weight	230 (104.3)

Hog Slopper

Model	SHB	SHF
Application	Skid Steer	Forklift
Capacity Range – Sand ft. ³ (m ³)	Adjustable from 6 3/4 to 9 (0.19 to 0.25)	Adjustable from 6 3/4 to 9 (0.19 to 0.25)
Dimensions LxWxH in.	41 x 36 x 24	29 x 32 x 21
Weight lb. (kg)	260 (117.9)	280 (126.9)

Grout Hog Material Delivery System

Model	GH75	GPH75	GPHC75	UGH75	UGPH75	UGPHC75
Machine Type	Horizontal Auger	Horizontal Auger	Horizontal Auger	Uphill Auger	Uphill Auger	Uphill Auger
Lifting Bale	N/A	N/A	Standard	N/A	N/A	Standard
Capacity – yd. ³ (m ³)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)
Material Discharge	3/4 yd. ³ in 2 1/2 minutes					
Power Source	Auxillary	Honda GX390 11.7 HP (8.7kw)	Honda GX390 11.7 HP (8.7kw)	Auxillary	Honda GX390 11.7 HP (8.7kw)	Honda GX390 11.7 HP (8.7kw)
Aggregate Size in. (cm)	3/4 (1.91)	3/4 (1.91)	3/4 (1.91)	1/2 (1.27)	1/2 (1.27)	1/2 (1.27)
Hyd. Flow Rate gpm@2000psi	10	10	10	10	10	10
Empty Weight lb. (kg)	985 (446.7)	1436 (651.3)	1525 (691.7)	1055 (478.5)	1475 (669)	1565 (709.8)
Gross Weight lb. (kg)	3885 (1807.5)	4436 (2012.1)	4526 (2056.5)	4055 (1839.3)	4475 (2029.8)	4565 (2070.6)
Dimensions L x W x H in.	92 x 41.5 x 49	92 x 41.5 x 49	92 x 41.5 x 62.5	100 x 37 x 50.5	113 x 47 x 50.5	113 x 47 x 50.5



EZ Grout Fence Hog®

Model FH 08-24 (24" Diameter) - handles up to 50 ft. roll of chain link or 330 ft. roll of woven wire.
or FH 08-36 (36" Diameter) - handles up to 100 ft. roll of chain link or 330 ft. roll of woven wire.

Developed with the assistance of Professional Fence Builders, the patented Fence Hog® unit was designed to satisfy customer request for a machine that picks up and dispenses cumbersome rolls of chain link fence easily with no physical effort.

Powered by hydraulics of the skid-steer Loader, the uniquely designed cage mechanism opens and tilts to retrieve the roll of fence from the ground. For the Fence Contractor, this means no more unrolling fence by hand and using extra men to stand it up. With the standard features of the Fence Hog®, this machine allows optimum efficiency for the fence contractor to install fabric quickly, easily, and professionally using only two people.

- No heavy lifting
- Affordable and easy to use
- Dispenses and stretches fence
- For use with a skid-steer loader
- Up to 36" diameter roll capacity
- Removable center post to hold woven wire in center of cage
- Sealed with powder coat paint
- Extension available for dispensing 10 to 12 ft. fence, max. 16 ft.
- Rotating turntable to smoothly dispense fabric
- Works with various fencing material such as chain link, woven wire, vinyl coated fabric, snow fence, etc.
- Attaches directly to skidsteer loader with a universal skidsteer attachment plate
- "Tilt" Full dispense swivel option for uneven terrain
- Optional Hog Hangers

The Fence Hog® can easily handle 100 ft. rolls of chainlink and 330 ft. rolls of woven wire fence. The operation is simple: the loader picks up the roll of fence with the cage and tilts the cage to vertical position. Also with the Fence Hog®, the wire can be lifted for easy installation of backstops or other high installation projects. This patented design is low maintenance, built of durable heavy-gauge steel construction, and best of all, your labor doesn't lift or carry the fence to dispense.

The Hog Hanger holds the fence in a temporary position from the top rail until the fence is stretched and secured to the post. Then simply remove the Hog Hanger and use on the next run of fence. For high fencing jobs, a Hog Hanger assists in placing the Hog Hangers on the top rail.



U.S. Patent #5,806,779

Turntable dispenses fence smoothly.



2 ft. & 4 ft. Extensions Available



Tilt



Hog Hangers®

Hog Hanger Helpers™



Hog Stringer®



EZ Grout Fence Hog® Product in Action

Nothing is more convincing to contractors than seeing the product in action...



Fast job setup! The Fence Hog picks up a roll of chain link and within minutes you're ready to stretch it to the posts.



The Hog Stringer dispenses bottom tension wire with ease, while the Hog Hangers slide easily on the top rail to temporarily hold the fence.

The optional Woven Wire Stretcher provides the necessary tension for speedy installation.



No job is too big for the Fence Hog...

...or too high...

It's all in a day's work.

"We at Dale W. Carter Fencing used the special designed fence hog on a 25,000 foot airport fence job in Red Bluff, CA and couldn't have done the job in a timely manner without it. We also use it on baseball backstops. Before the job had started I had flown to Seattle, WA to see the fence hog in action and liked what I had seen. I had talked to Damian and Greg at the factory and asked them about making some minor modifications for our needs, they did and it made a big difference. Thank You Fence Hog."

Dale Carter, Owner, Dale W. Carter Fencing, Redding, CA

Specifications

Model	Width	Empty Weight	Weight with 2 ft. Extension	Weight with 4 ft. Extension	Dimensions without Extensions DxWxH	Hydraulic Flow Rate
FH08-24	24"	1,195 lb. (543 kg)	1,350 lb. (614 kg)	1,595 lb. (702 kg)	33 3/8" x 74 11/16" x 106 15/16"	10 gal. @ 2,000 psi min.
FH08-36	36"	1,465 lb. (655 kg)	1,665 lb. (757 kg)	1,890 lb. (859 kg)	46 3/8" x 78 3/8" x 107"	35 gal. @ 3,000 psi max.
FHW	24"	530 lb. (240 kg)	N/A	N/A	31 1/4" x 36" x 57 3/4"	



EZ Grout Mini Fence Hog™

Just like its larger sibling, the Mini Fence Hog lifts, rolls and dispenses, but it's more compact. Ideal for residential chainlink and woven fence. Designed for use with a walk-behind.



- **Weight: 625 lb.**
- **No heavy lifting**
- **Affordable and easy to use**
- **Dispenses and stretches fence**
- **For use with a mini skid-steer loader**
- **Up to 24" diameter roll capacity**
- **Sealed with powder coat paint**
- **Rotating turntable** to smoothly dispense fabric
- **Works with various fencing material** such as chain link, woven wire, vinyl coated fabric, snow fence, etc.
- **Attaches directly to skidsteer loader** with optional FH-A-9 universal skid steer attachment plate (80 lbs.; 36 kg) or FHW-A MT-series Bobcat® walk-behind attachment plate (44 lbs.; 20 kg)



All the great features from the original Fence Hog, but in a compact size.



"By using the Mini Fence Hog, we cut two weeks off the job and saved 160 man hours. The machine paid for itself the first time we used it. And, it's definitely going to help those of us with back problems because it does the lifting for us. In today's market, it's a big mistake not doing business with these guys!"

Kenneth Crumpton, President/CEO, Crumpton Fence Co., LLC, Winfield, AL





EZ Grout Stretch-n-Go Hog™

Woven Wire Dispenser — Stretches as it dispenses!

Available in 6 ft. model

U.S. Patent #7,195,193,B2



The Stretch-n-Go Hog® fence dispenser can stretch up to 1/4 mile of woven wire in one load while it dispenses — that is **four 330 ft. rolls or two 660 ft. rolls**. The Stretch-n-Go Hog® dispenses at the rate of 2 mph and can more than double the amount of fence that a fence builder can put up in one day with only two laborers.

Woven wire is loaded by a skid steer and while dispensing, the Stretch-n-Go Hog® holds the fabric upright and guides the material along the fence line. Coated tension rolls protect wire during stretching while an adjustable brake system provides individual tension preferences. Fence can be nailed directly behind the skid steer, making for faster, more efficient work. The Stretch-n-Go Hog features fork pockets on both sides to allow the operator to easily switch from side to side.

- **Weights 1210 lb. (549 kg);
Max. gross weight: 5,210 lb.(2363 kg)**
- **Capacity: four rolls of 330 ft.
or 2 rolls of 660 ft. of wire**
- **Sealed with powder coat paint**
- **Load with skid steer**
- **Adjustable braking system for desired tension**
- **Optional barb wire attachment (up to 6 rolls)**
- **Dimensions (DxWxH): 48" x 86" x 661/8"**

Barb Wire Dispenser

Model SNGBARB

The optional Barb Wire Hog® mounts to the Stretch-n-Go Hog™, allowing six rolls of barb wire to be dispensed and stretched concurrently.





The Mobile Mud Hog®



Mixes and dispenses!

After several requests from Fence Contractors, EZ Grout adds to its line of quality fence products with the Mobile Mud Hog® to thoroughly and quickly mix materials and deliver those materials directly to the post-hole. The Mobile Mud Hog® comes standard-equipped with six patented rubber blades that wipe the sides of the drum and continually roll the mix to the center of the drum to allow for the best mixing process.

With the Mobile Mud Hog®, the contractor simply adds water and materials, starts the paddle rotation, and mixes. The skid steer operator simply drives along the fence line or pouring area while the material continues to mix as it is dispensed through the side discharge snout. The Mobile Mud Hog® mixes and dispenses quickly. In fact, Matt Thompson of Fence Solutions, Lancaster, Ohio, stated, "We filled 80 post holes in 30 minutes!"

The hydraulic powered Mobile Mud Hog® comes standard with Bobcat® attachment plates and forklift pockets to allow even more versatility. Or, units can be built to the contractor's specifications. With a load capacity of nearly one-half cubic yard, the Mobile Mud Hog® improves your jobsite efficiency.

Model MMH-12 Hydraulic Powered

- Empty weight, 1,000 lbs.
- Modified unit for use with a skid-steer loader or small fork lift
- 1/2 cubic yard maximum capacity per load
- Hooks to auxiliary hydraulics on your loader or forklift
- Mixes and delivers up to 1" aggregate
- Unloads 1/2 cubic yard in 1 minute

Specifications

Model	MMH12	MMH20
Empty Weight	1,000 lb. (454 kg)	1,350 lb. (614 kg)
Max. Gross Wt.	2,800 lb. (1270 kg)	4,350 lb. (1977 kg)
Discharge	1/2 cu.yd./min.	1/2 cu. yd./min.
Aggregate Size	1"	1"
Hydraulic Flow Rate	10 gal. @ 2,000 psi min. 20 gal. @ 3,000 psi max.	10 gal. @ 2,000 psi min. 35 gal. @ 3,000 psi max.
Dimensions DxWxH	40x45x58"	45 1/2 x 79 3/8 x 52 1/2"

"A+ Quality Fence and Deck, Inc. originally purchased the Mobile Mud Hog from EZ Grout to help install approximately 5,000 linear feet of 8 ft. tall pre-cast concrete fence, which we contracted to install at Maxwell Gunter AFB in Montgomery, Alabama.

The pre-cast concrete fence requires setting a post every five feet, requiring a footing consisting of almost 4 cubic feet of concrete. This fence is being installed in a sodded area and a redi-mix concrete truck would do extensive damage to the landscape, which would have to be repaired at our expense. Using the Mobile Mud Hog enabled us to keep our skid steer right against the fence line, resulting in very little turf damage and minimal repair expense.

The Mobile Mud Hog performed flawlessly, having mixed approximately 130 cubic yards of concrete...more than paying for itself by saving A+ Quality Fence and Deck, Inc. money in three ways:

Saving the expense of paying hourly rates to Redi-Mix companies to have their drivers wait for us. Saving the cost of payroll to have employees wait for Redi-Mix trucks. Substantially saving on labor hours to hand-mix concrete.

We looked at 3 to 4 other brands before purchasing the Mobile Mud Hog and concluded that the Mobile Mud Hog would best suit our needs. After mixing and dispensing the concrete with the Mobile Mud Hog, we now know it was the perfect choice!"

Craig Myers, President
A+ Quality Fence and Deck, Inc., Montgomery, Alabama





Mini Mobile Mud Hog®


The Mini Mobile Mud Hog® – just like its sibling – mixes and dispenses on-site using a Mini Skid Steer. The Mini Mobile Mud Hog comes standard with rubber blades that wipe the sides of the drum to allow for the best mixing process. Simply add water and materials, start the paddle rotation, and mix. Drive along the fence line or pouring area while the material continues to mix as it dispenses through the side discharge chute.

- **Mixing Paddles powered by hydraulics**
- **Manual slide gate** for dispensing aggregate
- **MMH4 attaches directly to Mini Skid Steer** with additional attachment plates
- **MMH9 attaches directly to Mini or Full size loader** with additional attachment plates



Model MMH4

Model MMH4 shown with optional FHW-A-9 attachment plate

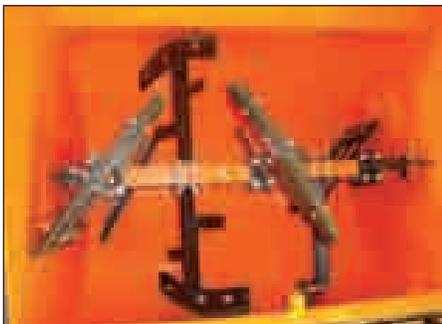

Heavy-duty paddles



Model MMH9

Specifications

Model	Dimensions WxLxH	Empty Weight	Gross Weight	Maximum Aggregate Size
MMH4	29 x 44 x 29" (74 x 112 x 74 cm)	350 lb. (159 kg)	950 lb. (431 kg)	3/4" (702 kg)
MMH9	36 x 53 x 36" (91 x 135 x 91 cm)	600 lb. (272 kg)	1,950 lb. (885 kg)	3/4" (859 kg)



EZ Grout Fencer's Cement Hog™

A cement delivery system that's perfect for postholes!

The Fencer's Cement Hog™ is a cement delivery system. Simply pour the cement from a ready mix truck into the hopper and drive along the fence line while dispensing just the right amount of cement needed in minute....instead of hours of shoveling.

The Fencer's Cement Hog™ was designed to mount on either side of a skid steer, allowing the operator to dispense from both the left or the right on either side of the fence.

- **Modified unit for use with a skid steer loader or small forklift**
- **One-half cubic yard maximum capacity.**
Also available up to 1 cubic yard
- **Hooks to auxiliary hydraulics on your loader or forklift; delivers up to one-inch aggregate**
- **Unloads one-half cubic yard in two minutes**
- **Delivers wet or dry materials – even dry sand**
- **10" discharge tube with 7½" auger**



Model
FCH50
FCH100



Drive along the fence line...
No shoveling.



Large, one-half cubic yard
hopper.

Specifications

Model	Dimensions DxWxH	Weight Empty lb. (kg)	Weight Gross lb. (kg)	Variable Pitch Auger	OD Discharge with 8 ft. Flexible Hose	Auger Tube	Hydraulic Requirement
FCH50	33¾ x 75⅝ x 40¾	790 (360)	2,790 (1268)	7½"	6"	10"	8 gpm @ 2,000 psi min.
FCH100	34½ x 76⅝ x 48½	1,050 (477)	5,050 (2295)	7½"	6"	10"	8 gpm @ 2,000 psi min.

Since its inception in 1998, EZ Grout has rapidly become a leading equipment manufacturer to the masonry, concrete construction market, and fencing industry. With roots firmly fixed in the masonry industry, owner Damian Lang, an innovative mason contractor based in southeastern Ohio, started EZ Grout to improve efficiency on the masonry jobsite. Lang — along with his team of masonry professionals, co-workers, and industry contacts — developed easier-to-use mortar mixers, bracing systems and other labor saving equipment for the masonry industry.

Subsequent to the introduction of his masonry equipment, Mr. Lang was approached by fencers about designing equipment to satisfy requests for a machine that picks up and dispenses rolls of chain link fence easily with no effort. EZ Grout took on the challenge!

Developed with the assistance of Professional Fence Builders and after several prototype models and extensive field-testing, Lang introduced the patented Fence Hog® Fence Dispenser in early 2001. Before long, other labor saving fencing equipment followed.

EZ Grout Corporation continues to gain thousands of customers who use their equipment everyday on jobsites across the country. Damian Lang stands behind each innovation and remains committed to revolutionizing the industry for the betterment of the mason and fencing contractors throughout the nation and abroad.



Manufacturing

EZG Manufacturing is a state of the art fabrication and design shop located in Southeastern Ohio. With cutting edge technology and over ten years experience in the manufacturing industry, EZG specializes in fabrication, design, and development of parts and machinery from a variety of materials including carbon steel, stainless steel, alloy steel, hastalloys, aluminums, and industrial plastic. Whether you need a single part built from a blueprint, or assistance all the way from prototype development to a full production run, EZG has a knowledgeable and experienced team that will get your job done on time and to your specifications. Call or email today for a quote, Project Estimator: 1-888-344-7688 • services@ezgrout.com.



Breakout Wrenches



Hydraulic Manifolds



Custom Engine Frames



Aluminum Stairs



Custom Stainless Steel



Part Fabrication



EZG Manufacturing
has been proudly serving
the construction, oil and gas,
industrial parts cleaning and
degreasing, material handling,
plant maintenance and repair,
trailer manufacturing, and other
various industries since 1999.



Equipment Specifications

Clousing Multi Turn 2000 (CNC Lathe)

- 16" OD x 50" between centers
- 8 Tool Turret for increased low cost production
- Wide range of carbide insert tooling

Robotic Welding Cell

- Fanuc 120ic Robot with 74" of reach
- Twin rotaries capable of 120" long x 60" wide tooling to better reach all welds
- Ideal for repetitive parts in higher quantity 100+ pieces per year / 10+ pieces per shipment
- Ideal for parts with multiple small welds or long continuous welds that force a lot of repositioning when done manually
- Tooling designed in house for decreased time in production run

Mazak 510cVCM (CNC Vertical Machining Center)

- 40" x 20" Cutting table
- 25HP spindle for deeper/faster cutting speeds
- 30 tool automatic tool changer
- Wide range of carbide insert tooling
- 4th axis for vertical or horizontal rotary milling
- Tooling for most SAE O-ring ports and common hydraulic cartridge cavities

Trumpf L4030 2D Laser with 4kW resonator

- 4000 W resonator allows cutting to 3/4" mild steel, 5/8" stainless steel, and 1/2" aluminum
- 80" wide x 160" long cutting bed for large parts
- 0.005" OD tolerance and 0.002" hole to hole accuracy
- Automated load/unload with 11 shelf storage rack for increased low cost production
- CAM software for easy accurate programming of customer parts (DWG or DxF files preferred)
- CAD design to assist in customer part development
- Single part to multi-piece production runs

Powder Coat Painting

- Paint booth capacity 7' high x 7' wide x 19' long (batch oven)

Metal Rolls (CNC Controlled Capacity)

- 6' long up to 1/4" plate, 5' long up to 5/16" plate
- Minimum diameter 7"
- Also equipped with cone rolls

Bystronic Xpert 150/310

- 150 ton CNC pressbrake
- 123" bed capability
- All relevant bend-technological data at the push of a button
- Bend angle control using pressure reference eliminates errors
- Highest repeatability accuracy on the market

Marvel 2125PC Band Saw (CNC Feed)

- 60 degree tilt head, 21" x 25" throat

Since its inception in 1998, EZ Grout has rapidly become a leading equipment manufacturer to the masonry and concrete construction markets. With roots firmly fixed in the masonry industry, owner Damian Lang, an innovative mason contractor based in southeastern Ohio, started EZ Grout to improve efficiency on the masonry jobsite. Prior to the onset of the EZ Grout Corporation, Damian Lang also started Lang Masonry Contractors 25 years ago which now does over \$10 million in masonry construction sales annually. For years, Mr. Lang had long recognized the need for a better way to fill masonry block, more commonly known as wall grouting. Conventional approaches such as grout pumps were labor intensive and prone to mechanical failure. Grout bucketing is even more labor intensive and physically exhausting.

After several prototype models and extensive field-testing, Lang introduced the patented Grout Hog® Grout Delivery System in early 1999. Later, Lang along with his team of masonry professionals, co-workers, and industry contacts, developed easier to use mortar mixers, bracing systems and other labor saving equipment for the masonry and fencing jobsites.



Damian Lang
President/Owner of EZ Grout Corporation

Due to considerable labor savings and high quality standards behind each product that EZ Grout equipment provides to their customers, EZ Grout Corporation continues to gain thousands of customers who use their equipment everyday on jobsites across the country. EZ Grout now has customers in every state in the U.S. and several foreign countries and is working to build an even stronger distributor network nationwide. Mr. Lang, President of EZ Grout Corporation and Lang Masonry Contractors, stands behind each innovation and remains committed to revolutionizing the industry for the betterment of the masons and contractors throughout the nation and abroad.

Distributed By:



EZG™
Manufacturing

1-800-417-9272 www.ezgrout.com

EZG is a division of EZ Grout Corporation

All EZ Grout products are backed by our one-year warranty on parts and are now available for order.
405 Watertown Road, Waterford, OH 45786 USA ■ Phone: 740-962-2024 ■ Fax: 740-962-2037 ■ web: www.ezgrout.com