

NC[®] alpha

Overview

The NC Alpha provides the low-clog performance of a field erected splash-fill tower with the convenience and value of the factory assembled NC cooling tower.

Primary Benefits

- Enhanced Low-Clog Performance — for dirty water applications
- Faster Turnaround — up to 50% lead time reduction and quick quotes helps to fit outage schedules
- Lower Installation Costs — up to 80% cost reduction
- Low Maintenance Costs — typical of an NC

Benefit Detail

Low-Clog Performance:


- Splash fill allows for better low-clog performance minimizing fill replacement frequency, downtime costs and other expenses relative to film fill
- Heavy 235 galvanized or stainless steel structures are stronger, lighter and more fire resistant compared to pressure-treated wood towers

Faster Turnaround:

- Shorter quoting time than field erected towers
- Significantly reduced lead times compared to field erected towers
- Improved ability to fit installation into an outage schedule reducing downtime costs

Lower Installation Cost:

- Easy-fit maintenance options for quick installation
- Total installation time reduced by 80%
- Factory assembly provides one shipment with minimal lay down area requirements
- Integral collection basin eliminates the cost for a concrete basin

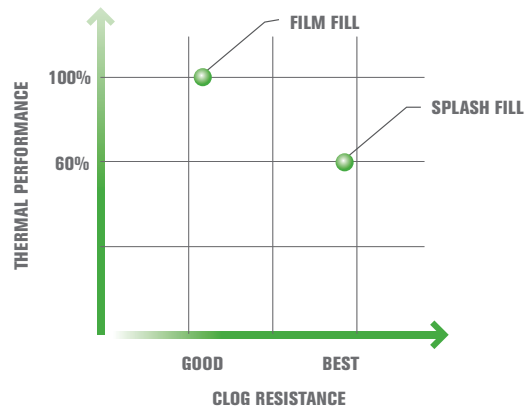

	NC Alpha	field erected
Quoting	1-2 hours	5-7 days
Lead Time	8 weeks*	16 weeks

*starting July 1, 2010

	NC Alpha	field erected
Installation Time	2-3 days	2-3 weeks
Shipments	1	6+
Lay Down Area	1 x Tower	3 x Tower

more

Benefit Detail

Low Maintenance:

- Gear drive standard — 5 year no-hassle operation
- Optional stainless steel cold water basin completely factory welded and leak free
- A full line of Marley controls and VFD options are available for superior energy management and complete tower energy control
- Rigorous structural review to minimize tower vibration, even with use of a VFD
- Assembled with as much as 71% recycled content

No-Hassle System 5 Geareducer®		belt drive
Annual Maintenance	\$624	\$2,380
5 Year Maintenance	\$4,270	\$11,900
example savings	\$7,630	

Common Applications

- Particulate carry over — often found in steel mills and cement plants
- Pulp carry over — typical in the paper industry and food processing where vacuum pumps or barometric condensers are used
- Ethylene glycol content
- Geothermal applications
- Salt water applications
- Petrochemical applications
- Phosphoric acid applications
- Fluorine applications

GPM Range

290 to 2700 GPM per cell

Features

- Highest thermal performance low-clog PVC splash fill offered by Marley
- Crossflow design, vertical air discharge
- Non-corrosive stainless or galvanized steel structure
- Induced draft — single fan per cell
- Factory assembled — easy installation
- Low sound fan, standard
- Marley System 5 Geareducer
- Optional welded stainless steel water collection basin
- VFD — allows maximum efficiency
- Belt drive available on all models up to 60hp
- Marley coupling specifically designed for variable torque VFD applications



SPX COOLING TECHNOLOGIES, INC. | OVERLAND PARK, KS 66213

P: 913 664 7400 F: 913 664 7439 spxcooling@spx.com

spxcooling.com

contact your Marley sales representative at spxcooling.com/en/sales

In the interest of technological progress, all products are subject to design and/or material change without notice. ISSUED 05/2013 IN-NCA-10

COPYRIGHT © 2013 SPX Corporation