

MULTI1NE

PRODUCTS HANDBOOK - R.17.0



GLOSSARY

Tipping load, Max	It's the maximum load that can be lifted just off the ground when the machine is straight, with back-weights and on firm, level ground. Boom not extended. Weight of attachment included, the tipping load is the value indicated minus the weight of the attachment.
Lifting capacity straight	It's the maximum load that can be lifted when the machine is straight on firm level ground, with back-weights and boom not extended. Weight of attachment included, the net lifting load is the value indicated minus the weight of the attachment. It's 80% of tipping load.
Lifting capacity fully articulated	It's the maximum load that can be lifted when the machine is fully articulated on firm level ground, with back-weights and boom not extended. Weight of attachment included, the net lifting load is the value indicated minus the weight of the attachment.
Max lift height	It's the height of the coupling plate pivot point with extended boom.
Breakout force / 50 cm	Rollback force measured at 500 mm from the pivot point, max value.
Pushing force	Calculated (c) pushing force of the machine with 100% efficiency.

Note:

Never exceed the rated lifting or hydraulic capacity of the machine.

When using attachments, know their capacity ratings and machine limitations. Machine specifications can be found in the Operator's Manual.

If not specified, all dimensions have been taken with standard tires.

All products listed in this catalogue may not be available on all markets and countries. Please consult your local MultiOne dealer for availability.

Compatibility table between attachments and loader models are advisory. Please consult your local MultiOne dealer to make sure that the attachment is compatible with your MultiOne mini loader.

INDEX

LOADERS	2	BUCKETS, MATERIAL HANDLING	30
2 SERIES.....	4	BIG BAG LIFTER	36
4 SERIES.....	6	COMBO BUCKET	31
5 SERIES.....	8	GENERAL BUCKET	30
6 SERIES.....	10	GRAPPLE BUCKET	32
7 SERIES.....	12	HIGH TIP BUCKET	33
8 SERIES.....	14	JIB CRANE, ONE-PIECE OR TELESCOPIC	37
9 SERIES.....	16	LIFTING TROLLEY	36
10 SERIES.....	18	LIGHT MATERIAL BUCKET	32
SD SERIES: 6.3SD, 7.3SD, 8.4SD	20	PALLET FORK	34
SD SERIES: 9.5SD	22	PALLET FORK HYDRAULIC CLAMP	35
OPTIONS FOR LOADERS	24	PALLET FORK WITH SIDE SHIFT	35



FARMING	38	HEDGE CUTTER	75
BALE FORK	39	LANDSCAPE POT CLAMP	76
FEED DISPENSER	41	LAWN MOWER	72
HAY BALE GRAPPLE	40	SICKLE BAR MOWER	74
HEAVY DUTY SILAGE FORK	38	SIDE BOOM WITH FLAIL MOWER DZ1	69
HIVE HANDLER	44	SIDE BOOM WITH FLAIL MOWER DZ2	70
HORSE ARENA HARROW	42	SPIKE AERATOR	71
MANURE FORK	39	SPRAYER	76
RUBBER SCRAPER	41	TORNADO LAWN MOWER	73
SILAGE CUTTING BUCKET	43	VINEYARD AND ORCHARD	77
SQUARE BALE CLAMP	43	DUAL BLADE HEDGE TRIMMER	77
DIGGING & CONSTRUCTION	45	INTER-ROW MOWER	78
AUGER	49	SHOOT REMOVER	79
BACKHOE	48	STAINLESS STEEL TIPPING DUMPER	82
CEMENT MIXER	52	TREE SHAKER WITH COLLECTOR	80
COLD PLANER	53	VINEYARD SPRAYER	82
CONCRETE MIXING BUCKET	52	VINEYARD TOOL CARRIER	81
CRUSHER BUCKET	55	LANDSCAPING	83
DEMOLITION JAW	54	HYDROSEEDER	89
DOZER BLADE	45	LEVELER	87
GRADER	51	POWER AUGER FOR TREE PLANTING	88
HYDRAULIC BREAKER	54	POWER HARROW	83
MINI DIGGER	47	POWER PLOW	87
OPTIONS FOR AUGER	50	POWER RAKE	86
PAVER FINISHER	53	RIPPER	86
SCREENING BUCKET	55	ROTARY TILLER	84
TRENCHER	46	STONE BURIER	85
ESTATE & PROPERTY MAINTENANCE	56	STUMP GRINDER	88
AERIAL WORK PLATFORM	64	TREE SPADE	90
DEBRIS AND LEAF BLOWER	65	FORESTRY	91
HIGH PRESSURE WASHER	62	ALUMINIUM RAMPS	96
LEAF VACUUM	58	DUMPER	91
ROTARY BROOM	57	HYDRAULIC BIO SHREDDER	95
SALT AND SAND SPREADER	63	LOG GRAPPLE	93
SNOW BLADE	59	LOG SPLITTER	94
SNOW BLOWER	60	TREE SHEAR	92
SNOW PLOW	61	WINCH	95
STAKE INSTALLER	64	OTHER ATTACHMENTS	96
STREET WASHER	66	OPTIONS FOR ATTACHMENTS	97
SWEEPER	56		
TRAILER	62		
VACUUM SWEEPER	57		
WEED BRUSH	58		
GROUNDS CARE	67		
CORE AERATOR	71		
FLAIL MOWER	68		
FLAIL MOWER WITH SIDE SHIFT	67		



DISTRIBUTION
uniForced

CHENILLES ET
ACCESSOIRES
POUR TOUTES
MARQUES

DISTRIBUTEUR DES PRODUITS

MULTI1NE

1-866-889-1272

www.uniforcedistribution.com



**Une
machine
plus de 170
accessoires**

MULTI1NE


2 SERIES



FEATURES

- 4WD hydrostatic Direct Drive motors, proportional servo control
- DBS (Dynamic Block System)
- Hydraulic oil cooler
- Hydraulic multiconnector
- Self-levelling H-frame boom
- 4-functions joystick
- ROPS-FOPS Level I
- 2 front working light
- Ergonomic seat with armrests and safety belt, adjustable position
- Mechanical parking brake

Model	2.3
Engine	B&S Vanguard 8270
Power (Iso Gross)	25 HP
Fuel	Petrol
Transmission	Hydrostatic
Drive speed (max.)	15 km/h (9.3 mph)
Aux. hydraulics oil flow	42 l/min (11.1 GPM)
Max. lifting height	1,6 m (63 in)
Tipping load, max ⁽¹⁾	530 kg (1168 lbs)
Lifting capacity straight ⁽²⁾	420 kg (926 lbs)
Lifting capacity fully articulated ⁽³⁾	340 kg (750 lbs)
Breakout force / 50 cm (19.7 in)	500 kg (1102 lbs)
Pushing force (c)	800 kgf (800 kp)
Specific ground pressure (w/standard tires)	610 kg/m ² (125 lbs/sqft)
Turning radius: inside/outside	700/1698 mm (27.6/66.9 in)
Standard tires (Tractor profile)	20x8.00-10
Weight	700 kg (1543 lbs)
Product Code	C951027

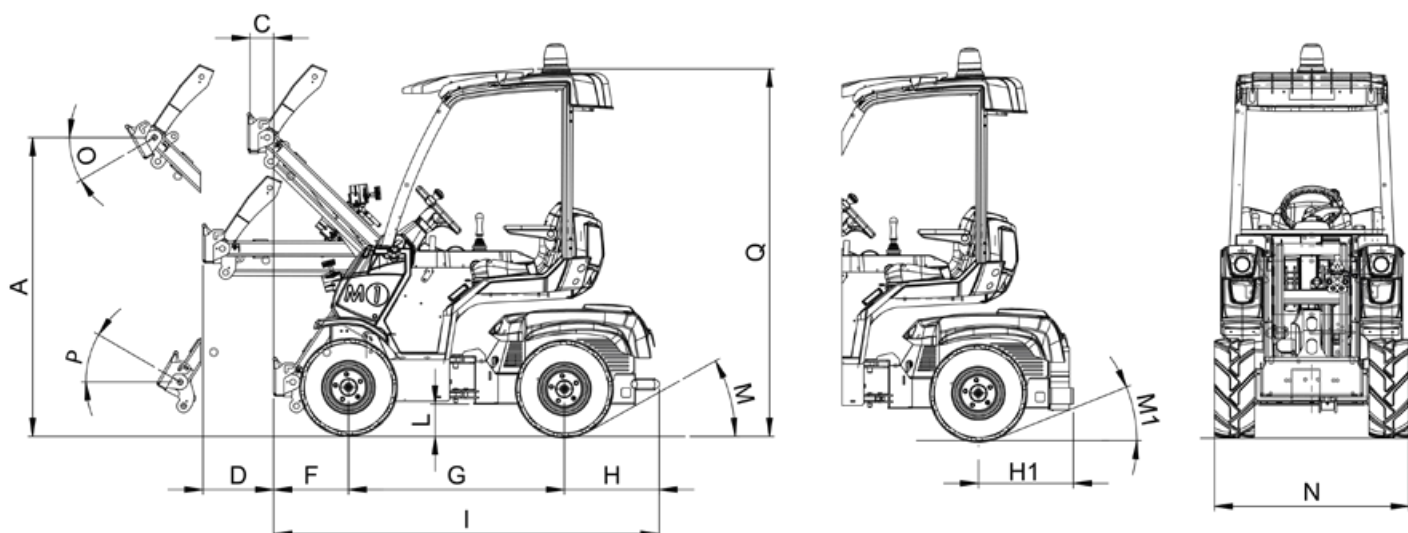

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	1584 / 62.3	I - Machine length	2049 / 80.6
C - Outreach with lifted boom	125 / 4.9	L - Ground clearance	171 / 6.7
D - Outreach with orizontal boom	375 / 14.7	M - Angle of departure	29°
F - Front length	398 / 15.6	M1 - Angle of departure with back-weights	21,5°
G - Wheelbase	1147 / 45.1	O - Dump angle	40°
H - Rear length	504 / 19.8	P - Rollback angle	39°
H1 - Rear length with back-weights	504 / 19.8		

Tires size	Width (N)	Height (Q)
20x8.00-10	1035 mm (40.7 in)	1948 mm (76.7 in)
23x8.50-12	1048 mm (41.2 in)	1986 mm (78.2 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight and with back-weights. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with back-weights. Weight of attachment is included.

4 SERIES



TIPPING LOAD
1020
kg



ENGINE POWER
20
hp



SPEED
14
km/h



FLOW RATE
31
l/min




LIFT HEIGHT
2,75
m

FEATURES

- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulic oil cooler
- Hydraulic multiconnector
- Double-H telescopic boom
- 4-functions joystick
- ROPS-FOPS Level I
- 2 front working light
- High efficiency wheel motors
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- Seat with armrests and safety belt, adjustable position
- Tipping sensor
- Mechanical parking brake

Model	4.2
Engine	Kubota D722
Power (Iso Gross)	20 HP
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.)	14 km/h (8.7 mph)
Aux. hydraulics oil flow	31 l/min (8.2 GPM)
Max. lifting height	2,75 m (108 in)
Tipping load, max ⁽¹⁾	1020 kg (2249 lbs)
Lifting capacity straight ⁽²⁾	820 kg (1808 lbs)
Lifting capacity fully articulated ⁽³⁾	700 kg (1543 lbs)
Breakout force / 50 cm (19.7 in)	800 kg (1764 lbs)
Pushing force (c)	900 kgf (900 kp)
Specific ground pressure (w/standard tires)	815 kg/m ² (167 lbs/sqft)
Turning radius: inside/outside	890/1890 mm (35/74.4 in)
Standard tires (Tractor profile)	23x8.50-12
Weight	940 kg (2072 lbs)
Product Code	C944000

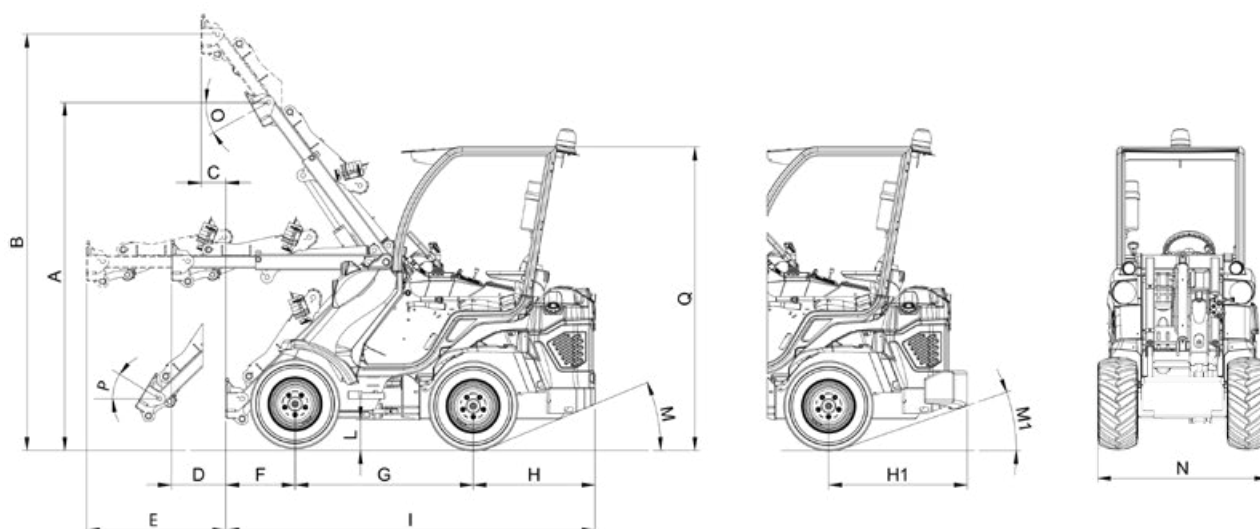

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2250 / 88.6	H1 - Rear length with back-weights	900 / 35.4
B - Pivot point height (extended boom)	2750 / 108.3	I - Machine length	2390 / 94.1
C - Outreach with lifted boom	160 / 6.3	L - Ground clearance	200 / 7.9
D - Outreach with orizontal boom (not extended)	350 / 13.8	M - Angle of departure	19°
E - Outreach with orizontal boom (extended)	900 / 35.4	M1 - Angle of departure with back-weights	19°
F - Front length	450 / 17.7	O - Dump angle	29°
G - Wheelbase	1150 / 45.3	P - Rollback angle	31°
H - Rear length	790 / 31.1		

Tires size	Width (N)	Height (Q)
23x8.50-12	980 mm (38.6 in)	1960 mm (77.2 in)
23x10.50-12	1090 mm (42.9 in)	1960 mm (77.2 in)
27x8.50-15	1000 mm (39.4 in)	2010 mm (79.1 in)
26x12.00-12	1200 mm (47.2 in)	1998 mm (78.6 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.

5 SERIES



TIPPING LOAD
1140*
kg

ENGINE POWER
28*
hp

SPEED
15*
km/h

FLOW RATE
42*
l/min


LIFT HEIGHT
2,75
m

(*) 5.3

FEATURES

- Hi-Flow system (only 5.3)
- 4WD hydrostatic Direct Drive motors, proportional servo control
- Hydraulic oil cooler
- Hydraulic multiconnector
- Self-levelling double-H telescopic boom
- 11-functions joystick (only 5.3)
- ROPS-FOPS Level I
- High efficiency wheel motors
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Seat with armrests and safety belt, adjustable position
- Tipping sensor
- Mechanical parking brake
- Dynamic Block System (DBS)

Model	5.2	5.3
Engine	Kubota D902	Yanmar 3TNV76
Power (Iso Gross)	25 HP	28 HP
Fuel	Diesel	
Transmission	Hydrostatic	
Drive speed (max.)	14 km/h (8.7 mph)	15 km/h (9.3 mph)
Aux. hydraulics oil flow	34 l/min (9 GPM)	42 l/min (11.1 GPM)
Max. lifting height	2,75 m (108 in)	
Tipping load, max ⁽¹⁾	1020 kg (2249 lbs)	1140 kg (2513 lbs)
Lifting capacity straight ⁽²⁾	820 kg (1808 lbs)	900 kg (1984 lbs)
Lifting capacity fully articulated ⁽³⁾	700 kg (1543 lbs)	740 kg (1631 lbs)
Breakout force / 50 cm (19.7 in)	800 kg (1764 lbs)	
Pushing force (c)	900 kgf (900 kp)	
Specific ground pressure (w/standard tires)	833 kg/m ² (171 lbs/sqft)	759 kg/m ² (156 lbs/sqft)
Turning radius: inside/outside	890/1890 mm (35/74.4 in)	800/2000 mm (31.5/78.7 in)
Standard tires (Tractor profile)	23x8.50-12	23x10.50-12
Weight	960 kg (2116 lbs)	1050 kg (2315 lbs)
Product Code	C977016	C977037

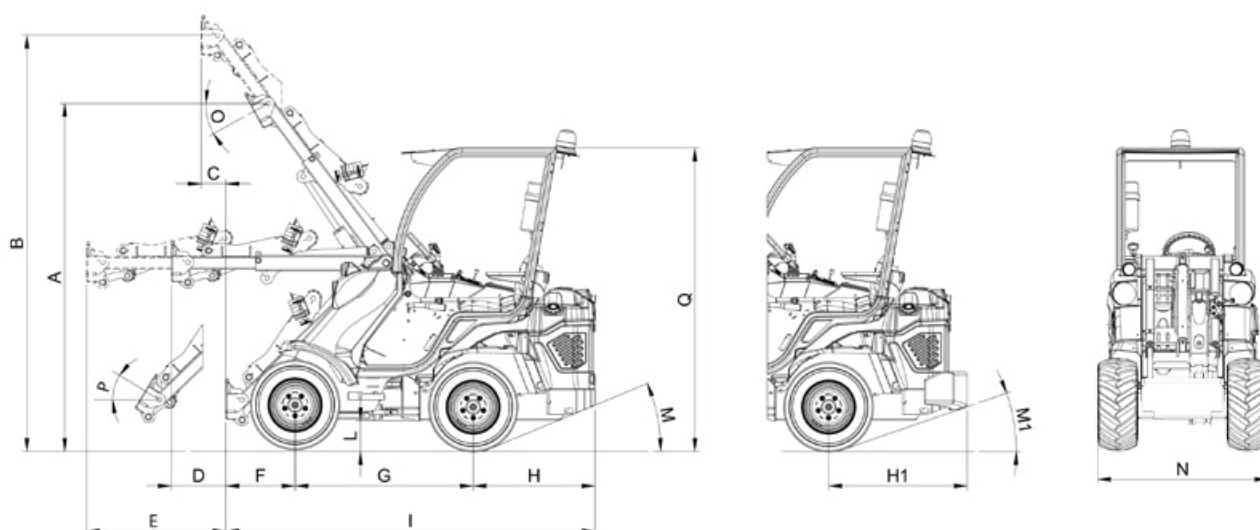

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2250 / 88.6	H1 - Rear length with back-weights	900 / 35.4
B - Pivot point height (extended boom)	2750 / 108.3	I - Machine length	2390 / 94.1
C - Outreach with lifted boom	160 / 6.3	L - Ground clearance	200 / 7.9
D - Outreach with orizontal boom (not extended)	350 / 13.8	M - Angle of departure	19°
E - Outreach with orizontal boom (extended)	900 / 35.4	M1 - Angle of departure with back-weights	19°
F - Front length	450 / 17.7	O - Dump angle	29°
G - Wheelbase	1150 / 45.3	P - Rollback angle	31°
H - Rear length	790 / 31.1		

Tires size	Width (N)	Height (Q)
23x8.50-12	980 mm (38.6 in)	1960 mm (77.2 in)
23x10.50-12	1090 mm (42.9 in)	1960 mm (77.2 in)
27x8.50-15	1000 mm (39.4 in)	2010 mm (79.1 in)
26x12.00-12	1200 mm (47.2 in)	1998 mm (78.6 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.

6 SERIES



TIPPING LOAD
1200
kg

ENGINE POWER
28
hp

SPEED
15*
km/h

FLOW RATE
46
l/min


LIFT HEIGHT
2,92
m

(*) 6.3S

FEATURES

- Hi-Flow system
- 4WD hydrostatic Direct Drive motors, proportional servo control
- DBS (Dynamic Block System)
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake (6.3+ and 6.3S), mechanical parking brake (6.3)
- High efficiency wheel motors (6.3)
- Radial piston high efficiency and heavy duty wheel motors (6.3+ and 6.3S)
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable suspension seat with armrests and safety belt

Model	6.3	6.3+	6.3S
Engine	Yanmar 3TNV76		
Power (Iso Gross)	28 HP		
Fuel	Diesel		
Transmission	Hydrostatic		
Drive speed (max.)	13 km/h (8.1 mph)	11 km/h (6.8 mph)	15 km/h (9.3 mph)
Aux. hydraulics oil flow	46 l/min (12.2 GPM)		
Max. lifting height	2,92 m (115 in)		
Tipping load, max ⁽¹⁾	1200 kg (2646 lbs)		
Lifting capacity straight ⁽²⁾	960 kg (2116 lbs)		
Lifting capacity fully articulated ⁽³⁾	780 kg (1720 lbs)		
Breakout force / 50 cm	1400 kg (3086 lbs)		
Pushing force (c)	900 kgf (900 kp)	1690 kgf (1690 kp)	1160 kgf (1160 kp)
Specific ground pressure (w/standard tires)	1022 kg/m² (209 lbs/sqft)	1044 kg/m² (214 lbs/sqft)	
Turning radius: inside/outside	905/2020 mm (35.6/79.5 in)		
Standard tires (Tractor profile)	23X8.50-12		
Weight	1400 kg (3086 lbs)	1430 kg (3153 lbs)	
Product Code	C961000	C961010	C961005

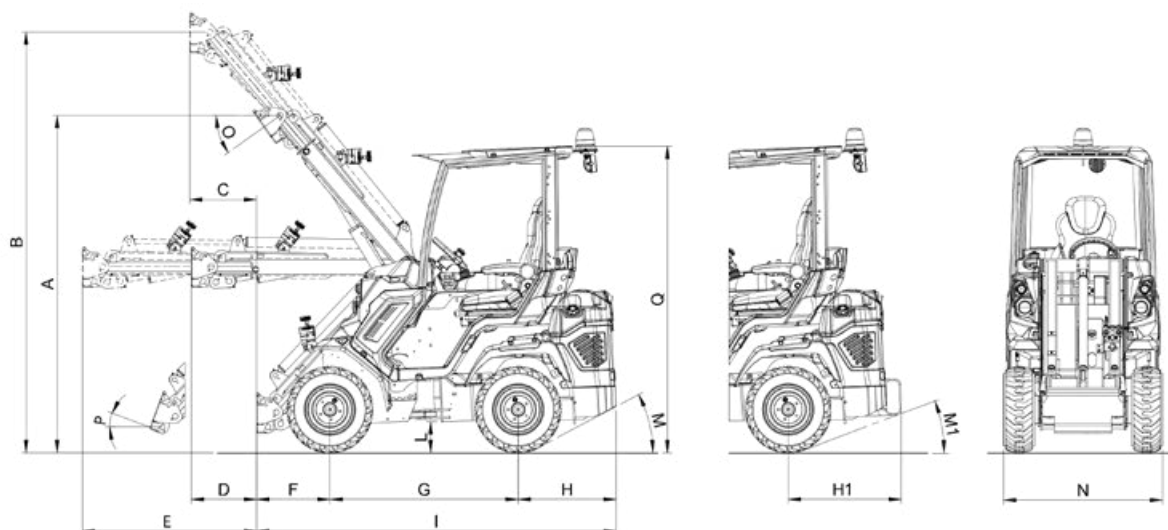

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2290 / 90.1	H1 - Rear length with back-weights	770 / 30.3
B - Pivot point height (extended boom)	2920 / 115	I - Machine length	2445 / 96.3
C - Outreach with lifted boom	455 / 17.9	L - Ground clearance	210 / 8.3
D - Outreach with horizontal boom (not extended)	445 / 17.5	M - Angle of departure	28°
E - Outreach with horizontal boom (extended)	1185 / 46.6	M1 - Angle of departure with back-weights	24°
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	665 / 26.2		

Tires size	Width (N)	Height (Q)
23X8.50-12	1070 mm (42 in)	2020 mm (79.5 in)
23X10.50-12 ⁽⁴⁾	1130 mm (44.5 in)	2020 mm (79.5 in)
26X12.00-12 ⁽⁴⁾	1300 mm (51.2 in)	2040 mm (80.3 in)
27X8.50-15	1070 mm (42 in)	2080 mm (81.9 in)
27X10.50-15 ⁽⁴⁾	1150 mm (45.3 in)	2080 mm (81.9 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.

⁽⁴⁾ Only 6.3+ and 6.3S.


7 SERIES



FEATURES

- Hi-Flow system (not available for 7.2)
- 4WD hydrostatic Direct Drive motors, proportional servo control
- DBS (Dynamic Block System)
- Torque divider (optional on 7.2)
- Self-levelling double-H telescopic boom
- 11-functions joystick (7.3, 7.3+, 7.3S)
- Multi-disk parking brake
- Radial piston high efficiency and heavy duty wheel motors
- Integrated back-weights
- 2 speed (only 7.3S)
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable suspension seat with armrests and safety belt

Model	7.2	7.3	7.3+	7.3S (2 speed)
Engine	Yanmar 3TNV76	Yanmar 3TNV82		
Power (Iso Gross)	28 HP	35 HP		
Fuel	Diesel			
Transmission	Hydrostatic			
Drive speed (max.)	11 km/h (6.8 mph)	15 km/h (9.3 mph)	11 km/h (6.8 mph)	10-20 km/h (6.2-12.4 mph)
Aux. hydraulics oil flow	37 l/min (9,8 GPM)	68 l/min (17.9 GPM)		
Max. lifting height	2,90 m (114 in)			
Tipping load, max ⁽¹⁾	1500 kg (3307 lbs)	1550 kg (3417 lbs)		
Lifting capacity straight ⁽²⁾	1200 kg (2645 lbs)	1240 kg (2734 lbs)		
Lifting capacity fully articulated ⁽³⁾	1020 kg (2249 lbs)	1070 kg (2360 lbs)		
Breakout force / 50 cm	1700 kg (3748 lbs)			
Pushing force (c)	1690 kgf (1690 kp)	1300 kgf (1300 kp)	1690 kgf (1690 kp)	2000 kgf (2000 kp)
Specific ground pressure (w/standard tires)	1113 kg/m ² (228 lbs/sqft)	1154 kg/m ² (236 lbs/sqft)		1168 kg/m ² (239 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)			
Standard tires (Tractor profile)	23X10.50-12			
Weight	1610 kg (3549 lbs)	1670 kg (3682 lbs)		1690 kg (3726 lbs)
Product Code	C962015	C962000	C962005	C962010

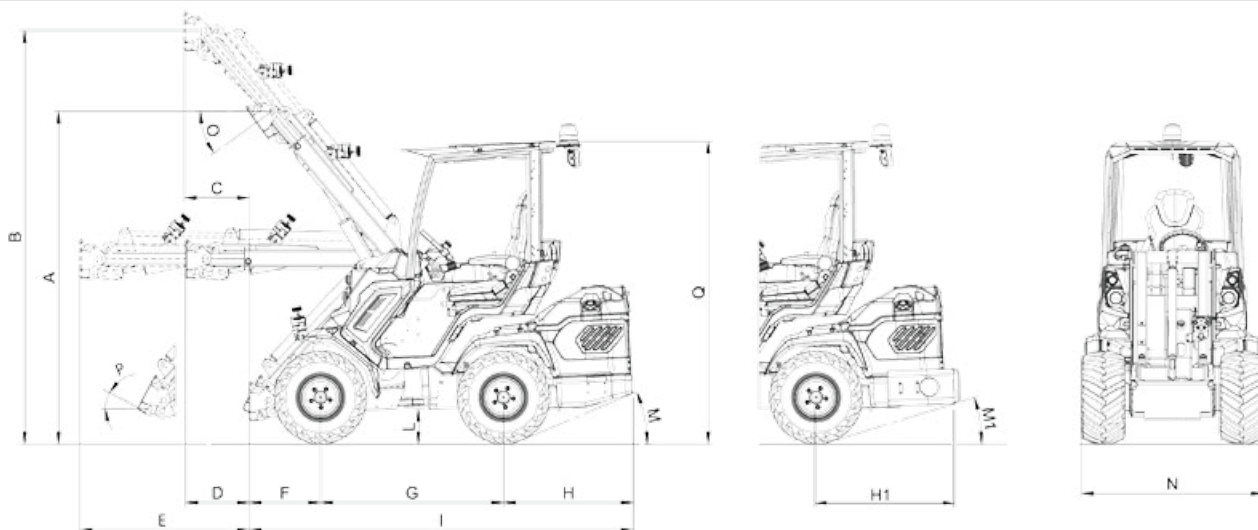

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2280 / 89.7	H1 - Rear length with back-weights	1010 / 39.7
B - Pivot point height (extended boom)	2900 / 114	I - Machine length	2690 / 105.9
C - Outreach with lifted boom	455 / 17.9	L - Ground clearance	210 / 8.3
D - Outreach with orizontal boom (not extended)	445 / 17.5	M - Angle of departure	21°
E - Outreach with orizontal boom (extended)	1185 / 46.6	M1 - Angle of departure with back-weights	20°
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	910 / 35.8		

Tires size	Width (N)	Height (Q)
23X8.50-12	1070 mm (42.2 in)	2020 mm (79.5 in)
23X10.50-12	1130 mm (44.5 in)	2020 mm (79.5 in)
26X12.00-12	1280 mm (50.4 in)	2040 mm (80.3 in)
27X8.50-15	1070 mm (42.1 in)	2080 mm (81.9 in)
27X10.50-15	1150 mm (45.3 in)	2080 mm (81.9 in)






⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.

8 SERIES




				
TIPPING LOAD	ENGINE POWER	SPEED	FLOW RATE	LIFT HEIGHT
1600 kg	40 hp	12-23* km/h	72 l/min	2,98 m

(*) 8.4S

FEATURES

- Hi-Flow system
- 4WD hydrostatic Direct Drive motors, proportional servo control
- DBS (Dynamic Block System)
- Torque divider
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake
- Radial piston high efficiency and heavy duty wheel motors
- Integrated back-weights
- 2 Speed (only 8.4S)
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable suspension seat with armrests and safety belt

Model	8.4+	8.4S (2 speed)
Engine	Yanmar 3TNV88	
Power (Iso Gross)	40 HP	
Fuel	Diesel	
Transmission	Hydrostatic	
Drive speed (max.)	15 km/h (9.3 mph)	12 - 23 km/h (7.5 - 14.3 mph)
Aux. hydraulics oil flow	72 l/min (19 GPM)	
Max. lifting height	2,98 m (117.3 in)	
Tipping load, max ⁽¹⁾	1600 kg (3527 lbs)	
Lifting capacity straight ⁽²⁾	1280 kg (2822 lbs)	
Lifting capacity fully articulated ⁽³⁾	1070 kg (2360 lbs)	
Breakout force / 50 cm	1700 kg (3748 lbs)	
Pushing force (c)	2050 kgf (2050 kp)	
Specific ground pressure (w/standard tires)	1051 kg/m ² (215 lbs/sqft)	1062 kg/m ² (217 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)	
Standard tires (Tractor profile)	26X12.00-12	
Weight	1722 kg (3796 lbs)	1740 kg (3836 lbs)
Product Code	C963000	C963005

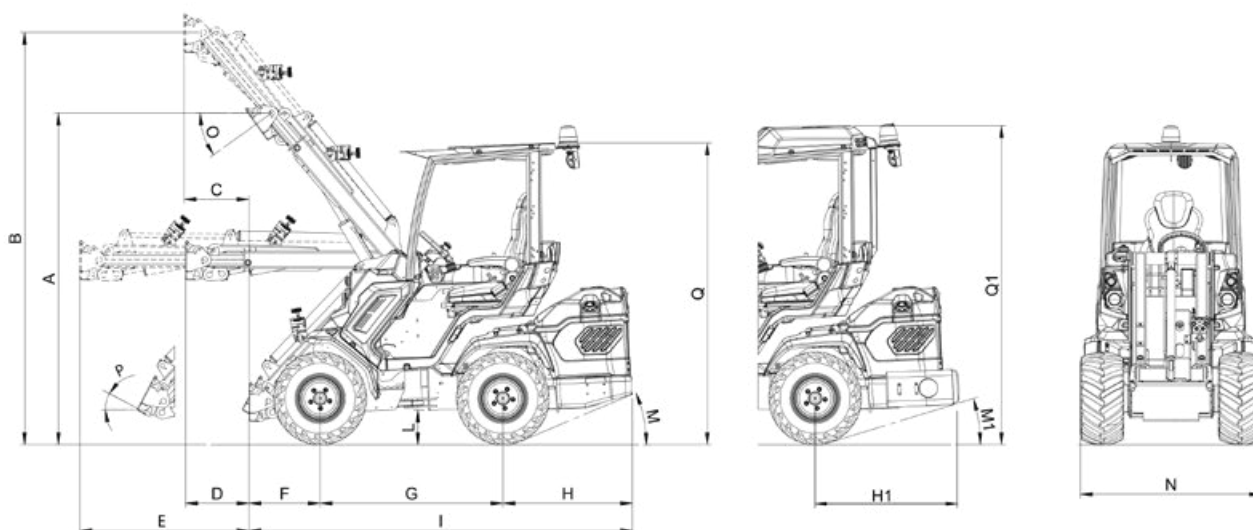

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2320 / 91.3	H1 - Rear length with back-weights	1010 / 39.7
B - Pivot point height (extended boom)	2980 / 117.3	I - Machine length	2690 / 105.9
C - Outreach with lifted boom	455 / 17.9	L - Ground clearance	240 / 9.5
D - Outreach with horizontal boom (not extended)	445 / 17.5	M - Angle of departure	23°
E - Outreach with horizontal boom (extended)	1185 / 46.6	M1 - Angle of departure with back-weights	22°
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	910 / 35.8	Q1 - Height with A/C (with standard tires)	2240 / 88.2





Tires size	Width (N)	Height (Q)
23X8.50-12	1070 mm (42.2 in)	2020 mm (79.5 in)
23X10.50-12	1130 mm (44.5 in)	2020 mm (79.5 in)
26X12.00-12	1280 mm (50.4 in)	2040 mm (80.3 in)
27X8.50-15	1070 mm (42.1 in)	2080 mm (81.9 in)
27X10.50-15	1150 mm (45.3 in)	2080 mm (81.9 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.

9 SERIES

				
TIPPING LOAD	ENGINE POWER	SPEED	FLOW RATE	LIFT HEIGHT
2600 kg	57* hp	30* km/h	95* l/min	3,21 m


(*) 9.6


KOHLER
ENGINES*


FEATURES

- Hi-Flow system
- New Turbo Common Rail Kohler engine (TIER 4 Final) - (9.6 model)
- 4WD hydrostatic Direct Drive motors, proportional servo control
- DBS (Dynamic Block System)
- Torque divider
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake
- 2 Speed
- Radial piston high efficiency and heavy duty wheel motors
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable suspension seat with armrests and safety belt

Model	9.5	9.6
Engine	Yanmar 4TNV88	Kohler 1903 TCR
Power (Iso Gross)	50 HP	57 HP
Fuel	Diesel	
Transmission	Hydrostatic	
Drive speed (max.) - 2 speed	12-25 km/h (7,5-15.5 mph)	15-30 km/h (9.3-18.6 mph)
Aux. hydraulics oil flow	85 l/min (22.5 GPM)	95 l/min (25 GPM)
Max. lifting height	3,21 m (126.4 in)	
Tipping load, max ⁽¹⁾	2600 kg (5732 lbs)	
Lifting capacity straight ⁽²⁾	2080 kg (4585 lbs)	
Lifting capacity fully articulated ⁽³⁾	1600 kg (3527 lbs)	
Breakout force / 50 cm	2200 kg (4850 lbs)	
Pushing force (c)	1750 kgf (1750 kp)	1800 kgf (1800 kp)
Specific ground pressure (w/standard tires)	843 kg/m ² (172 lbs/sqft)	858 kg/m ² (175 lbs/sqft)
Turning radius: inside/outside	1030/2550 mm (40.5/100.4 in)	
Standard tires (Tractor profile)	31X15.50-15 (400/50-15)	
Weight	2025 kg (4464 lbs)	2060 kg (4541 lbs)
Product Code	C965000	C965005

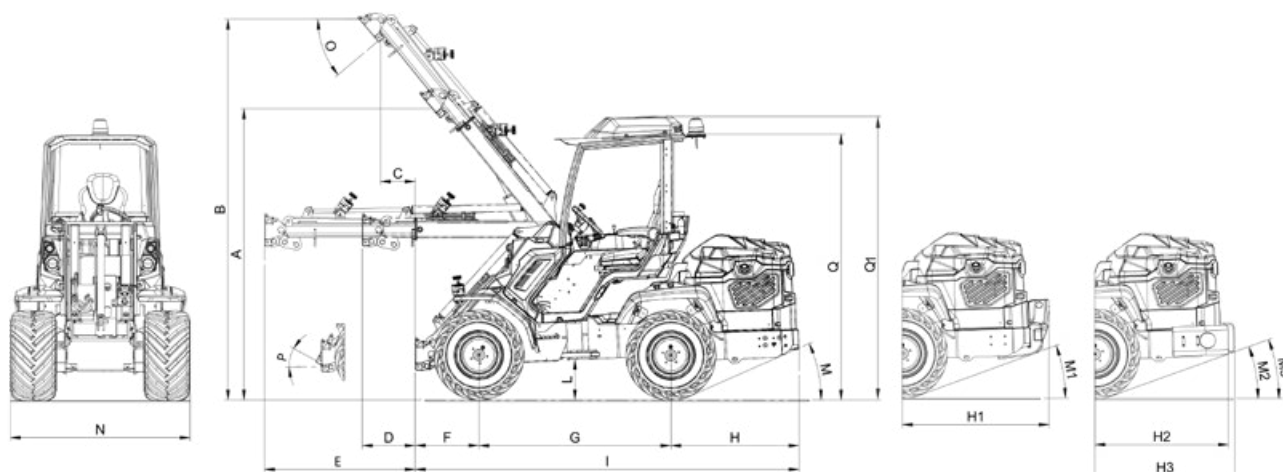

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2530 / 99.6	H3 - Rear length (with 180 kg back-weights - rear)	1170 / 46
B - Pivot point height (extended boom)	3210 / 126.4	I - Machine length (without back-weights)	3200 / 126
C - Outreach with lifted boom (extended boom)	460 / 18	L - Ground clearance	340 / 13.4
D - Outreach with orizontal boom (not extended)	460 / 18	M - Angle of departure (without back-weights)	24°
E - Outreach with orizontal boom (extended)	1256 / 49.5	M1 - Angle of departure (with 440 kg back-weights)	19°
F - Front length	530 / 20.8	M2 - Angle of departure (with 180 kg back-weights - side)	21°
G - Wheelbase	1600 / 63	M3 - Angle of departure (with 180 kg back-weights - rear)	21°
H - Rear length (without back-weights)	1070 / 42	O - Dump angle	31°
H1 - Rear length (with 440 kg back-weights)	1225 / 48.2	P - Rollback angle	29°
H2 - Rear length (with 180 kg back-weights - side)	1115 / 43.9	Q1 - Height with A/C (with standard tires)	2350 / 92.5

Tires size	Width (N)	Height (Q)
31X15.50-15	1500 mm (59 in)	2150 mm (84.6 in)
27X10.50-15	1370 mm (54 in)	2100 mm (83 in)
27X8.50-15	1320 mm (52 in)	2100 mm (83 in)
26X12.00-12	1410 mm (55.5 in)	2090 mm (82.5 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load)


⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.


10 SERIES




TIPPING LOAD
2700
kg


ENGINE POWER
75*
hp


SPEED
32/40
km/h


FLOW RATE
95
l/min


LIFT HEIGHT
3,21
m

(*) 10.9




KOHLER
ENGINES*

FEATURES

- Hi-Flow system
- New Turbo Common Rail Kohler engine (TIER 4 Final) - (10.9 Model)
- 4WD hydrostatic Direct Drive motors, proportional servo control
- DBS (Dynamic Block System)
- Torque divider
- Self-levelling double-H telescopic boom
- 11-functions joystick
- Multi-disk parking brake
- 2 Speed
- Radial piston high efficiency and heavy duty wheel motors
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable suspension seat with armrests and safety belt

Model	10.8	10.9
Engine	Yanmar 4TNV98	Kolher 2504TCR
Power (Iso Gross)	72 HP	75 HP
Fuel	Diesel	
Transmission	Hydrostatic	
Drive speed (max.) - 2 speed	16 - 32 km/h (10 - 20 mph) 20 - 40 km/h (12.4 - 24.8 mph)	
Aux. hydraulics oil flow	95 l/min (25 GPM)	
Max. lifting height	3,21 m (126.4 in)	
Tipping load, max ⁽¹⁾	2700 kg (5952 lbs)	
Lifting capacity straight ⁽²⁾	2160 kg (4762 lbs)	
Lifting capacity fully articulated ⁽³⁾	1700 kg (3748 lbs)	
Breakout force / 50 cm	2600 kg (5732 lbs)	
Pushing force (c)	2650 kgf (2650 kp)	
Specific ground pressure (w/standard tires)	892 kg/m ² (183 lbs/sqft)	874 kg/m ² (179 lbs/sqft)
Turning radius: inside/outside	1030/2550 mm (40.5/100.4 in)	
Standard tires (Tractor profile)	31X15.50-15 (400/50-15)	
Weight	2140 kg (4718 lbs)	2100 kg (4630 lbs)
Product Code	C966000	C966005

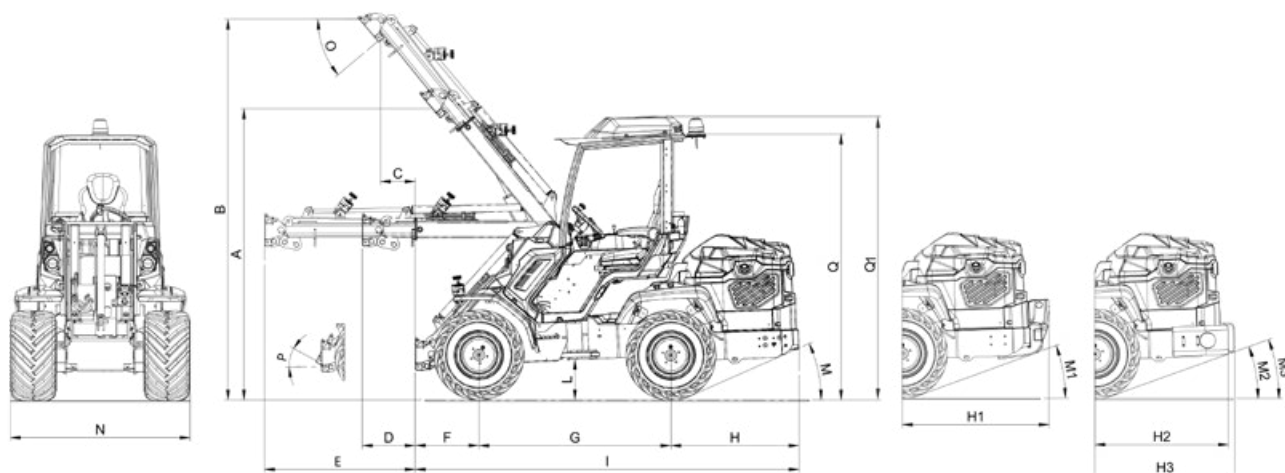

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2530 / 99.6	H3 - Rear length (with 180 kg back-weights - rear)	1170 / 46
B - Pivot point height (extended boom)	3210 / 126.4	I - Machine length (without back-weights)	3200 / 126
C - Outreach with lifted boom (extended boom)	460 / 18	L - Ground clearance	340 / 13.4
D - Outreach with orizontal boom (not extended)	460 / 18	M - Angle of departure (without back-weights)	24°
E - Outreach with orizontal boom (extended)	1256 / 49.5	M1 - Angle of departure (with 440 kg back-weights)	19°
F - Front length	530 / 20.8	M2 - Angle of departure (with 180 kg back-weights - side)	21°
G - Wheelbase	1600 / 63	M3 - Angle of departure (with 180 kg back-weights - rear)	21°
H - Rear length	1070 / 42	O - Dump angle	31°
H1 - Rear length (with 440 kg back-weights)	1225 / 48.2	P - Rollback angle	29°
H2 - Rear length (with 180 kg back-weights - side)	1115 / 43.9	Q1 - Height with A/C (with standard tires)	2350 / 92.5

Tires size	Width (N)	Height (Q)
31X15.50-15	1500 mm (59 in)	2150 mm (84.6 in)
27X10.50-15	1370 mm (54 in)	2100 mm (83 in)
27X8.50-15	1320 mm (52 in)	2100 mm (83 in)
26X12.00-12	1410 mm (55.5 in)	2090 mm (82.5 in)






⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load)

⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.

SD SERIES: 6.3SD, 7.3SD, 8.4SD




 TIPPING LOAD 1610* kg	 ENGINE POWER 40* hp	 SPEED 17* km/h	 FLOW RATE 37* l/min	 LIFT HEIGHT 2,9 m
---	---	--	---	---

(*) 8.4SD

FEATURES

- Self-levelling double-H telescopic boom
- 4WD hydrostatic Direct Drive motors, proportional servo control
- DBS (Dynamic Block System)
- Integrated back-weights
- 4-functions joystick
- Hydraulic oil cooler
- Hydraulic multiconnector
- High efficiency wheel motors
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable spring seat with armrests and safety belt
- Mechanical parking brake

Model	6.3 SD	7.3 SD	8.4 SD
Engine	Yanmar 3TNV76	Yanmar 3TNV82	Yanmar 3TNV88
Power (Iso Gross)	28 HP	35 HP	40 HP
Fuel	Diesel		
Transmission	Hydrostatic		
Drive speed (max.)	14 km/h (8.7 mph)	15 km/h (9.3 mph)	17 km/h (10.5 mph)
Aux. hydraulics oil flow	31 l/min (8.2 GPM)	37 l/min (9.8 GPM)	37 l/min (9.8 GPM)
Max. lifting height	2,90 m (114 in)		
Tipping load, max ⁽¹⁾	1500 kg (3307 lbs)	1580 kg (3483 lbs)	1610 kg (3549 lbs)
Lifting capacity straight ⁽²⁾	1200 kg (2645 lbs)	1260 kg (2778 lbs)	1290 kg (2844 lbs)
Lifting capacity fully articulated ⁽³⁾	900 kg (1984 lbs)	1100 kg (2425 lbs)	1230 kg (2712 lbs)
Breakout force / 50 cm	1400 kg (3086 lbs)	1700 kg (3748 lbs)	
Pushing force (c)	1000 kgf (1000 kp)	1200 kgf (1200 kp)	
Specific ground pressure (w/standard tires)	1113 kg/m ² (228 lbs/sqft)	1175 kg/m ² (240 lbs/sqft)	1230 kg/m ² (252 lbs/sqft)
Turning radius: inside/outside	825/2090 mm (32.5/82.3 in)		
Standard tires (Tractor profile)	23X8.50-12	23X10.50-12	26X12.00-12
Weight	1610 kg (3549 lbs)	1700 kg (3748 lbs)	1780 kg (3924 lbs)
Product Code	C967000	C967100	C967200

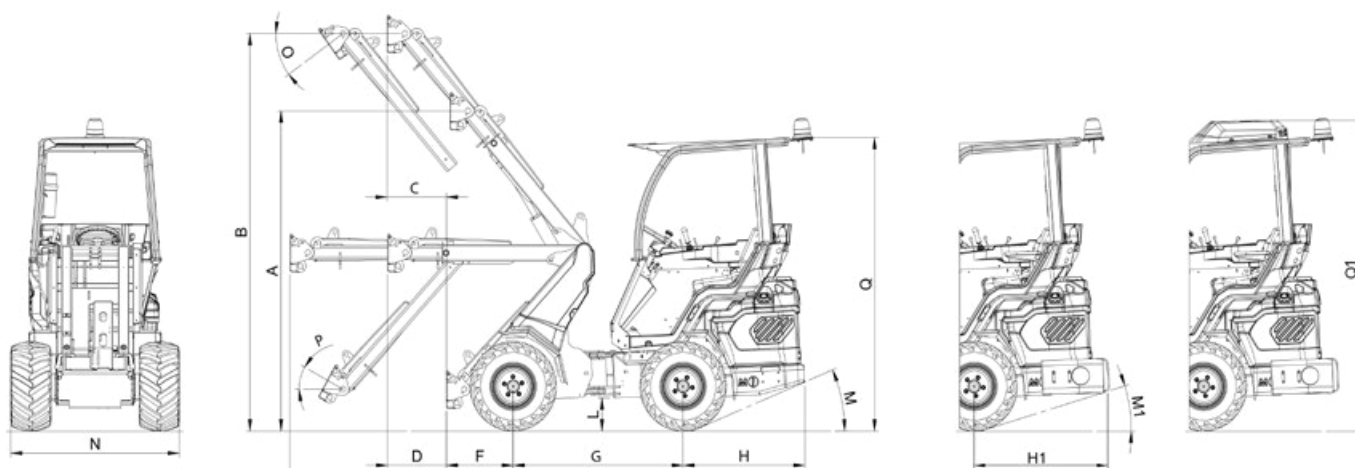

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2290 / 90	H1 - Rear length with back-weights	1010 / 39.7
B - Pivot point height (extended boom)	2900 / 114	I - Machine length (without back-weights)	2690 / 105.9
C - Outreach with lifted boom (extended boom)	455 / 17.9	L - Ground clearance	210 / 8.3
D - Outreach with orizontal boom (not extended)	445 / 17.5	M - Angle of departure (without back-weights)	21°
E - Outreach with orizontal boom (extended)	1185 / 46.6	M1 - Angle of departure (with back-weights)	15°
F - Front length	500 / 19.7	O - Dump angle	36°
G - Wheelbase	1280 / 50.4	P - Rollback angle	29°
H - Rear length	910 / 35.8	Q1 - Height with A/C and standard tires (8.4SD)	2340 / 92.1

Tires size	Width (N)	Height (Q)
26X12.00-12	1300 mm (51.2 in)	2140 mm (84.2 in)
27X10.50-15	1150 mm (45.3 in)	2180 mm (85.8 in)
23X10.50-12	1130 mm (44.5 in)	2100 mm (82.7 in)
27X8.50-15	1070 mm (42.1 in)	2180 mm (85.8 in)
23X8.50-12	1070 mm (42.1 in)	2100 mm (82.7 in)






⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.

SD SERIES: 9.5SD




				
TIPPING LOAD	ENGINE POWER	SPEED	FLOW RATE	LIFT HEIGHT
2650 kg	50 hp	18 km/h	51 l/min	3,21 m

FEATURES

- Self-levelling double-H telescopic boom
- 4WD hydrostatic Direct Drive motors, proportional servo control
- DBS (Dynamic Block System)
- 9-functions joystick
- Multi-disk parking brake
- Radial piston high efficiency and heavy duty wheel motors
- Hydraulic oil cooler
- Hydraulic multiconnector
- ROPS-FOPS Level I
- LCD graphic display with programmed service (tachometer, hour meter, fuel gauge, maintenance light, light indicator and other 14 indicators)
- 2 front working light
- Ergonomic full adjustable spring seat with armrests and safety belt

Model	9.5 SD
Engine	Yanmar 4TNV88
Power (Iso Gross)	50 HP
Fuel	Diesel
Transmission	Hydrostatic
Drive speed (max.)	18 km/h (11.2 mph)
Aux. hydraulics oil flow	51 l/min (13.5 GPM)
Max. lifting height	3,21 m (126.4 in)
Tipping load, max ⁽¹⁾	2650 kg (5842 lbs)
Lifting capacity straight ⁽²⁾	2120 kg (4674 lbs)
Lifting capacity fully articulated ⁽³⁾	1650 kg (3638 lbs)
Breakout force / 50 cm	2200 kg (4850 lbs)
Pushing force (c)	2050 kgf (2050 kp)
Specific ground pressure (w/standard tires)	856 kg/m ² (175 lbs/sqft)
Turning radius: inside/outside	1030/2550 mm (40.5/100.4 in)
Standard tires (Tractor profile)	31X15.50-15 (400/50-15)
Weight	2055 kg (4530 lbs)
Product Code	C967300

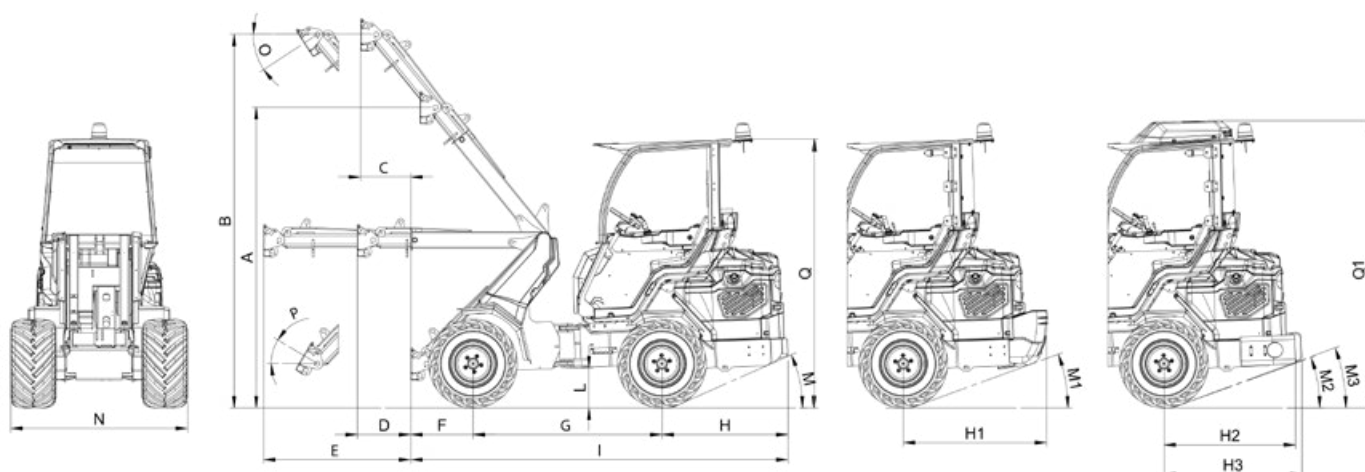

Dimensions (mm / in)			
A - Pivot point height (not extended boom)	2530 / 99.6	H3 - Rear length (with 180 kg back-weights - rear)	1170 / 46
B - Pivot point height (extended boom)	3210 / 126.4	I - Machine length (without back-weights)	3200 / 126
C - Outreach with lifted boom (extended boom)	460 / 18	L - Ground clearance	340 / 13.4
D - Outreach with orizontal boom (not extended)	460 / 18	M - Angle of departure (without back-weights)	24°
E - Outreach with orizontal boom (extended)	1256 / 49.5	M1 - Angle of departure (with 440 kg back-weights)	19°
F - Front length	530 / 20.8	M2 - Angle of departure (with 180 kg back-weights - side)	19°
G - Wheelbase	1600 / 63	M3 - Angle of departure (with 180 kg back-weights - rear)	19°
H - Rear length	1070 / 42	O - Dump angle	31°
H1 - Rear length (with 440 kg back-weights)	1225 / 48.2	P - Rollback angle	29°
H2 - Rear length (with 180 kg back-weights - side)	1115 / 43.9	Q1 - Height with A/C (with standard tires)	2460 / 97

Tires size	Width (N)	Height (Q)
31X15.50-15	1500 mm (59 in)	2260 mm (89 in)
27X10.50-15	1370 mm (54 in)	2210 mm (87 in)
27X8.50-15	1320 mm (52 in)	2210 mm (87 in)
26X12.00-12	1410 mm (55.5 in)	2190 mm (86.5 in)

⁽¹⁾ Maximum load that can be lifted just off the ground when the machine is straight, with back-weights and boom not extended. Weight of attachment included.

⁽²⁾ Machine straight, with back-weights and boom not extended. Weight of attachment is included. (80% of tipping load).

⁽³⁾ Machine fully articulated, with back-weights and boom not extended. Weight of attachment is included.

OPTIONS FOR LOADERS

Standard
 Optional
 Not available



TELESCOPIC BOOM

Telescopic boom with double H frame for extra strength. It allows reaching considerable load heights, ensuring an excellent visibility of the load at any time.


1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



SELF-LEVELLING

This is an ideal device for lifting heavy loads safely. It is installed on the machine boom and keeps the load level, without the need to continuously correct the position with the joystick.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



BOOM FLOATING SYSTEM

It allows the mounted attachments to follow the contours of the land perfectly. Ideal for applications in agriculture and in the care of the green areas.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



FULLY GLASS CAB WITH INNER CLOTHING

This is the best insulation system for the driver to protect him from cold, wind, rain, and snow. Easy access thanks to the large door and the compass glass opening.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



"SMART" CABIN

The most competitive solution for the operator who wants to improve working conditions thanks to a light cabin which limits the discomfort created by weathering.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



HEATING

Three-way heating with adjustable air flows and temperature.


1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



HEATED SEAT

Ideal for cold climates, it significantly increases the comfort of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



HIGH COMFORT HEATED SEAT

Ergonomic heated seat with fully adjustable suspension, headrest, armrests, safety belt and documents compartment.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



AIR CONDITIONING FOR CABIN

Air conditioning system from the roof of the cabin, with adjustable fan speed and electronic temperature control. Wide air outlets create a very comfortable ventilation system inside the cabin.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



ROPS-FOPS

The ROPS is intended to protect the operator from injuries caused by machine overturns or rollovers. The FOPS structure is tested and certified in accordance with ISO 3449 and protects the operator against falling objects.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



SAFETY PROTECTION BAR

It is placed on the left side of the machine to protect the operator from falling out of the vehicle. It can be locked and unlocked very quickly thanks to a special mechanism.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



ROAD LIGHTS

Front and rear lights, direction indicators, turning light, beacon, mirrors.


1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



TRAILER COUPLING

Rear tow hook with double connection: with tow ball (car type) or tow pin (agricultural type).

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



INTEGRATED BACK-WEIGHTS

Integrated back-weights are used to increase the lifting capacity of the machine. They are mounted inside the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



BACK-WEIGHTS

Back-weights are used to increase the lifting capacity of the machine. They are to be mounted on the rear of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



DYNAMIC BLOCK SYSTEM (DBS)

The DBS diverts oil flow between the left & right side hydraulic wheel motors: the hydraulic oil flows in parallel between the hydraulic wheel motors on each side operating similar to a differential lock.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



TORQUE DIVIDER

It evenly distributes hydraulic oil between the front right and front left side hydraulic motors, improving traction on slippery and uneven surfaces.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



HYDRAULIC MULTICONNECTOR

It is a innovative coupling system for front attachments that allow the connection of the hydraulic lines in a few seconds without stress.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



MULTICONNECTOR TO QUICK COUPLING 3 LINES ADAPTER

Adaptor to be put on the multiconnector, in order to connect standard flat face connections.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



REAR HYDRAULIC OUTLETS

They are used to mount on the rear side attachments that need hydraulic supply. The rear outlets are controlled by the control panel.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



AUTOMATIC LOCKING/UNLOCKING PLATE

On the automatic attachment plate the locking pins move hydraulically and are operated from cockpit. This way the driver can stay on the seat when coupling and disconnecting non-hydraulic attachments.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



REAR COUPLING PLATE

It is used to assemble attachments on the rear of the machine.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



12V REAR ELECTRIC SOCKET

12 Volt rear electric socket to connect the attachments.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



ENGINE BLOCK HEATER

It is an ideal device for cold temperatures. The system keeps the engine at an optimal temperature for easy starting with very cold climates. 220V or 110V available.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



WHEEL SPACER KIT

Wheel spacers are used to make the machine wider and increase its stability.


1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



DRIVER AREA COVER

Covers the machine interior, protects against rain, snow, etc.


1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



ATTACHMENT COUPLING PLATE

Plate to be welded on the customer's attachment to make it suitable for MultiOne mini loader.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



MULTIONE/USA MINI LOADER COUPLING ADAPTER

Coupling adapter suitable to mount USA mini loader standard attachments on MultiOne mini loader.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



BEACON LIGHT

Orange beacon light mounted on the top of the cab's roof.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



MULTI-FUNCTIONS JOYSTICK

The multi-function electronic joystick allows an easy and precise control of the boom and attachments.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



HI FLOW

It's a additional pump that increases the outlets oil flow.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



BIODEGRADABLE OIL

A eco-friendly choice.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



BACKUP WARNING BEEPER

It help keep everyone safer during MultiOne machine operation.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



DRIVE MOTORS POWER KIT

The Power kit increases torque, power and speed of the standard drive motors.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



REAR BULL BAR WITH SIDE EXTENSIONS

It protects the rear side of the machine in case of shocks.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD



SNOW CHAINS

MultiOne snow chains improve traction on snow or ice.

1 Series	2 Series	4 Series	5 Series	6 Series	7 Series	8 Series	9 Series	10 Series	6-7-8 SD	9.5 SD

GENERAL BUCKET

<http://tiny.cc/generalbucket>


FEATURES & BENEFITS

- Efficient design
- Heavy Duty construction
- Cutting edge designed for bolt on teeth

The MultiOne bucket design enables good visibility to the cutting edge, making loading, grading, and dumping more efficient. Heavy duty steel construction includes slide wear bars on the bottom of the bucket, and the cutting edge is designed for bolt-on teeth.



Model	Volume	Width	Deep	Height	Weight	Nr. of teeth	Code
80	85 l (3 ft ³)	80 cm (31.5 in)	63 cm (24.8 in)	47 cm (18.5 in)	40 kg (88 lbs)	4	C890001
90	100 l (3.5 ft ³)	90 cm (35.4 in)	67 cm (26.4 in)	47 cm (18.5 in)	44 kg (97 lbs)	4	C895021
110	205 l (7.2 ft ³)	110 cm (43.3 in)	63 cm (24.8 in)	52 cm (20.5 in)	72 kg (159 lbs)	6	C890006
130	240 l (8.5 ft ³)	130 cm (51.2 in)	63 cm (24.8 in)	52 cm (20.5 in)	93 kg (205 lbs)	8	C890005
150	280 l (9.9 ft ³)	150 cm (59 in)	63 cm (24.8 in)	47 cm (18.5 in)	106 kg (234 lbs)	9	C890004

Accessories

	Weight	Code
Tooth	1,7 kg (3.7 lbs)	C890007

Compatibility	1.1 M14	2.3 MK-MZ	3.520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT80	9.6 GT80	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
80														
90														
110														
130														
150														

Very compatible

Compatible

Not compatible



COMBO BUCKET

<http://tiny.cc/combobucket>


FEATURES & BENEFITS

- Heavy Duty construction
- Hydraulic locking valve for load holding
- Increased dumping height
- Multiple functions: digging, dozing, grading, grappling, and dumping

This multi-purpose bucket enables can be used for demolition, landscaping, and general construction work. When used as a grapple, the dual cylinders, equipped with load holding valves, provide a secure clamping force. Open the bucket for fine grading. In dumping operations, loading height is increased by opening the bucket.

Heavy duty steel construction includes a cutting edge that is designed for bolt-on teeth.



Model	Volume	Width	Deep	Height	Weight	Nr. of teeth	Code
110	260 l (9.2 ft ³)	110 cm (43.3 in)	81 cm (32 in)	65 cm (25.6 in)	149 kg (329 lbs)	6	C890075
130	310 l (11 ft ³)	130 cm (51.2 in)	81 cm (32 in)	65 cm (25.6 in)	182 kg (401 lbs)	8	C890076
150	385 l (13.6 ft ³)	150 cm (59 in)	81 cm (32 in)	65 cm (25.6 in)	198 kg (437 lbs)	9	C890077

Accessories

	Weight	Code
Tooth	1,7 kg (3.7 lbs)	C890007

Compatibility	1.1 M14	2.3 MK-MZ	3.520 3.525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
110														
130														
150														

Very compatible

Compatible

Not compatible


GRAPPLE BUCKET

<http://tiny.cc/grapplebucket>

FEATURES & BENEFITS

- Efficient design
- Heavy duty construction
- Easily controlled hydraulic grapple

This bucket is ideally designed to dig and grab difficult material. Heavy duty steel bucket design, combined with the center mounted hydraulic cylinder and efficiently designed grapple teeth, enable this bucket to do multiple jobs, from loading and grading loose soils and materials, to grabbing and loading awkward materials.



Model	Width	Deep	Height	Weight	Code
110	110 cm (43.3 in)	67 cm (26.4 in)	47 cm (18.5 in)	119 kg (262 lbs)	C890062
130	130 cm (51.2 in)	67 cm (26.4 in)	47 cm (18.5 in)	134 kg (295 lbs)	C890061

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
110														
130														


INDUSTRIAL GRAPPLE BUCKET

<http://tiny.cc/industrialgrapplebucket>

FEATURES & BENEFITS

- Move hard to handle materials easily
- Two hydraulic grapples easy to operate
- Handles bulky, uneven loads securely

This bucket is designed to handle bulky, irregularly shaped objects found in demolition, industrial, construction, recycling. Ideal for trees, large rocks, bush, industrial and demolition scrap, and recycling debris.



Model	Width	Weight	Code
110	110 cm (43.3 in)	185 kg (407 lbs)	NA
130	130 cm (51.2 in)	200 kg (441 lbs)	NA

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
110														
130														

Very compatible

Compatible

Not compatible

LIGHT MATERIAL BUCKET

<http://tiny.cc/lightmatbucket>

FEATURES & BENEFITS

- High capacity
- Good visibility
- Reinforced body

Designed for moving high volumes of light weight materials, including grain, forage materials, wood chips, mulch, and snow.



Model	Volume	Width	Deep	Height	Weight	Code
110	400 l (14 ft³)	110 cm (43.3 in)	76 cm (29.9 in)	77 cm (30.3 in)	90 kg (198 lbs)	C890053
130	480 l (17 ft³)	130 cm (51.2 in)	76 cm (29.9 in)	77 cm (30.3 in)	102 kg (225 lbs)	C890054
150	550 l (19.4 ft³)	150 cm (59 in)	76 cm (29.9 in)	77 cm (30.3 in)	112 kg (247 lbs)	C890052
180	660 l (23.3 ft³)	180 cm (71 in)	76 cm (29.9 in)	77 cm (30.3 in)	127 kg (280 lbs)	C890055

Compatibility	1.1 M14	2.3 MK-MZ	3.5 S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
110														
130														
150														
180														

HIGH TIP BUCKET

<http://tiny.cc/hightipbucket>

FEATURES & BENEFITS

- Hydraulic operation
- Heavy Duty design
- Increased dump height
- Excellent volume

Increase the dump height of the machine by almost 60 cm (24 in) using the high tip bucket. This increased reach enables loading high-side trucks without the need of a ramp. The bucket is available with a flat cutting edge.



Model	Volume	Width	Deep	Height	Weight	Code
100	210 l (8.1 ft³)	100 cm (39.4 in)	86 cm (33.8 in)	61 cm (24 in)	154 kg (339 lbs)	C890090
130	280 l (9.9 ft³)	130 cm (51.2 in)	86 cm (33.8 in)	61 cm (24 in)	174 kg (384 lbs)	C890092
150	320 (11.3 ft³)	150 cm (59 in)	86 cm (33.8 in)	61 cm (24 in)	188 kg (414 lbs)	C890093
180	380 (13.4 ft³)	180 cm (71 in)	86 cm (33.8 in)	61 cm (24 in)	208 kg (460 lbs)	C890094


Compatibility	1.1 M14	2.3 MK-MZ	3.5 S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
100														
130														
150														
180														

Very compatible

Compatible

Not compatible

PALLET FORK

<http://tiny.cc/palletfork>


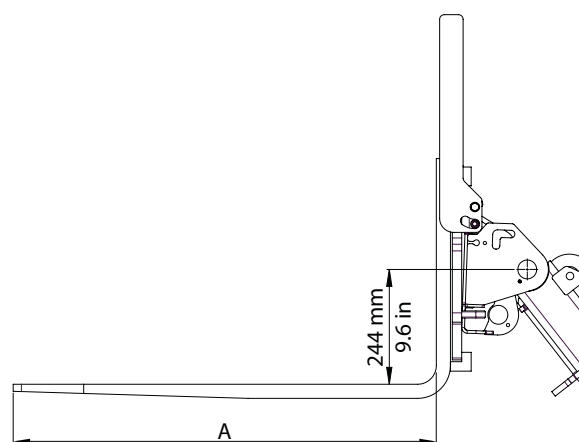
FEATURES & BENEFITS

- **Must-have attachment**
- **Heavy duty construction**
- **Easily adjustable fork width**

The quick attach pallet fork enables safe and quick handling of multiple sized pallets.

The forks are forged from high strength steel, and are available in several lengths based on model size. The fork frame is designed to allow the width of the forks to be easily adjusted by as much as 1 m (39 in).

Optional bolt on back stop provides additional safety.



Model	Forks Length (A)	Lifting Capacity	Width	Weight	Code
80	80 cm (31.5 in)	250 kg (551 lbs)	70 cm (27,6 in)	38 kg (84 lbs)	C895120
90	90 cm (35.4 in)	1000 kg (2204 lbs)	100 cm (39,4 in)	76 kg (168 lbs)	C890300
110	110 cm (43.3 in)	1200 kg (2646 lbs)	100 cm (39,4 in)	97 kg (214 lbs)	C890305
120	120 cm (47.3 in)	2000 kg (4408 lbs)	100 cm (39,4 in)	120 kg (265 lbs)	C890310

Optional (may be required by law)

Back stop

C890311

Compatibility	1:1 M14	2:3 MK-MZ	S520 S525	4:2 5:2	5:3 7:2	6:3	7:3	8:4	9:5 GT80	9:6 GT80	10:8 10:9	6:3SD	7:3SD 8:4SD	9:5SD
Model														
80														
90														
110														
120														

PALLET FORK HYDRAULIC CLAMP


<http://tiny.cc/hydraulicclamp>

FEATURES & BENEFITS

- A unique option for the pallet fork system
- Secures awkward loads to the forks

The hydraulic clamp attaches to the pallet fork frame, changing the pallet fork to a versatile grapple system. The hydraulically operated grapple secures loads awkward loads like logs, poles, large tubes, and more.

The hydraulic clamp assembly requires either a model C890300 or C890305 or C890310 pallet fork (not included with the hydraulic clamp).

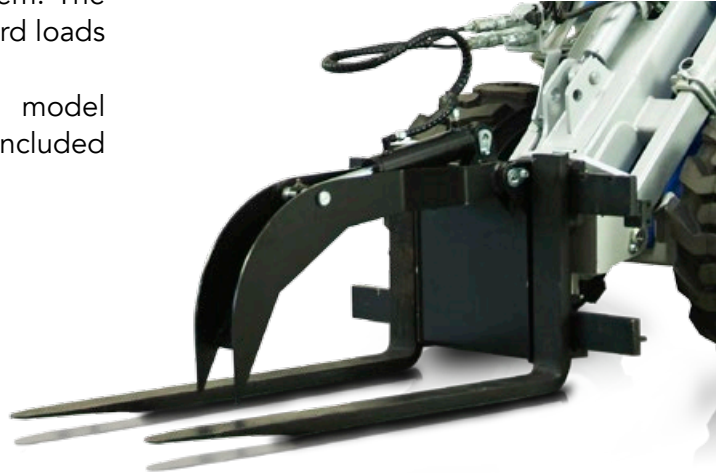

Model	Min. diameter to grab	Max. diameter to grab	Weight	Code
Pallet Fork Hydraulic Clamp	40 cm (15.7 in)	90 cm (35.4 in)	46 kg (102 lbs)	C890585

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT960	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD


PALLET FORK WITH SIDE SHIFT

<http://tiny.cc/palletforkwithsideshift>

FEATURES & BENEFITS

- Designed to work in tight areas or along narrow aisles
- Safely controlled side shift from the driver's position

Hydraulically side shifting the forks enables easier and safer handling and loading of a wide variety of pallet sizes.



Model	Forks Length	Lifting Capacity	Weight	Code
Pallet Fork with side shift	120 cm (47.2 in)	2000 kg (4410 lbs)	200 kg (441 lbs)	C890316

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT960	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

BIG BAG LIFTER

<http://tiny.cc/bigbaglifter>


FEATURES & BENEFITS

- Simple and efficient
- Rounded anti-swing side bars

This attachment enables safe and efficient handling of the oversized product bags containing fertilizer, corn, wood pellets, briquettes, and other granular products.

The anti-sway side bars increase operating safety.

The heavy-duty construction has been widely tested, proving to be strong, reliable and durable.



Model	Lifting Capacity	Max Width	Lift Hook Height	Weight	Code
Big Bag Lifter	1200 kg (2645 lbs)	100 cm (39.4 in)	133 cm (52.4 in)	49 kg (108 lbs)	C890713

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

LIFTING TROLLEY


<http://tiny.cc/liftingtrolley>

FEATURES & BENEFITS

- Designed to safely lift and handle heavier loads
- Made from heavy duty steel for reliability
- Excellent fork visibility

The lifting trolley is ideal for lifting and handling heavy pallets, oversized material bags, and other heavy materials. This unit can also be used to load and unload trucks and trailers.

The lifting trolley is equipped with foam filled rough terrain tires to allow all terrain materials transport.



Model	Forks Length	Lifting Capacity	Max Height	Weight	Code
Lifting Trolley	90 cm (35.4 in)	1000 kg (2204 lbs)	175 cm (69 in)	216 kg (476 lbs)	C890481

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD


Very compatible

Compatible

Not compatible



JIB CRANE, ONE-PIECE OR TELESCOPIC

<http://tiny.cc/jibcrane>


FEATURES & BENEFITS

- Useful for great outreach and high lift
- Safety hook included
- Compact for good visibility

The MultiOne Jib Crane provides additional reach for lifting operations. The jib crane is available in either a one piece design or a hydraulically adjustable telescopic design. Each of these designs includes a heavy duty safety hook.

The telescopic jib crane enables the load to be kept close to the machine and then extended outwards for placement.



Model	Length	Structural capacity	Weight	Code
One-piece	250 cm (98.4 in)	200 kg (440 lbs)	41 kg (90.4 lbs)	C890710
Telescopic	110+60 cm (43.3+23.6 in)	500 kg (1100 lbs)	85 kg (187.4 lbs)	C890712

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
One-piece														
Telescopic														

Very compatible

Compatible

Not compatible


HEAVY DUTY SILAGE FORK

<http://tiny.cc/silagefork>


FEATURES & BENEFITS

- Heavy duty frame
- Versatile and efficient
- Replaceable teeth

The multi-purposed silage fork, in combination with the frame top hydraulic clamp, makes moving loose or baled silage safe and easy. The extra strength framework allows heavy loads, like round bales, log piles and more, to be safely and effectively moved. The lower fork teeth are easily removed and replaced when worn.

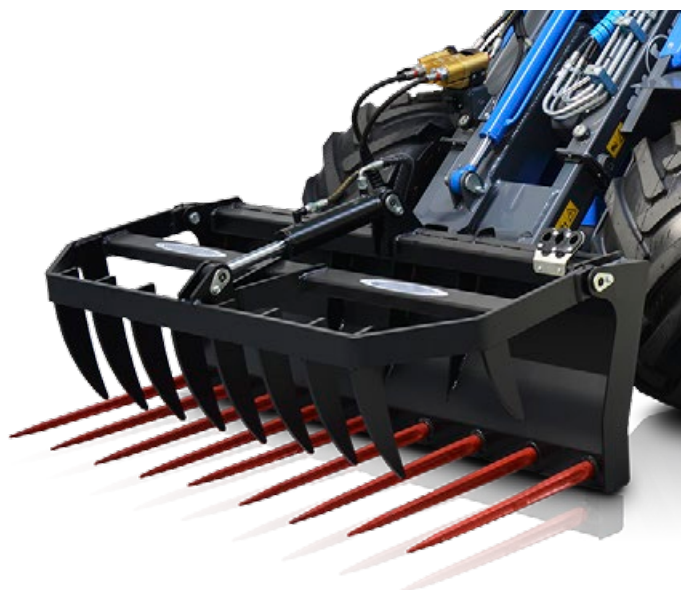

Model	Width	Weight	Code
80	80 cm (31.5 in)	67 kg (148 lbs)	C895061
95	95 cm (37.4 in)	88 kg (194 lbs)	C890354
120	120 cm (47.3 in)	110 kg (242 lbs)	C890352
150	150 cm (59 in)	130 kg (287 lbs)	C890353

Compatibility	1:1 M14	2:3 MK-MZ	3:5 S520 S525	4:2 5:2	5:3 7:2	6:3	7:3	8:4	9:5 GT960	9:6 GT960	10:8 10:9	6:3SD	7:3SD 8:4SD	9:5SD
Model														
80														
95														
120														
150														

Very compatible

Compatible

Not compatible

MANURE FORK

<http://tiny.cc/manurefork>

FEATURES & BENEFITS

- Simple design
- Strong, replaceable teeth
- Designed for excellent visibility from the operator's seat

The manure fork is designed to easily handle loose materials like hay, straw, or animal bedding. The simple design promotes easy handling of manure.

When worn, the fork teeth are quickly and easily replaced.



Model	Teeth length	Weight	Code
80	80 cm (31.5 in)	60 kg (132.3 lbs)	C890380
110	110 cm (43.3 in)	85 kg (187.4 lbs)	C890381

Compatibility	1.1 M14	2.3 MK-MZ	5.5/20 S525	4.2 S12	5.3 12	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
80														
110														

BALE FORK

<http://tiny.cc/roundbalefork>

FEATURES & BENEFITS

- Efficient
- Reliable

Designed to carry any kind of bales.

The load balancing spikes are bolted into the fork body, making them easily replaceable.



Model	Teeth length	Width	Weight	Code
Bale Fork (2 Teeth)	80 cm (31.5 in)	85 cm (33.5 in)	40 kg (88.2 lbs)	C890400
Bale Fork (3 Teeth)	80 cm (31.5 in)	85 cm (33.5 in)	45 kg (99.2 lbs)	C890401


Compatibility	1.1 M14	2.3 MK-MZ	5.5/20 S525	4.2 S12	5.3 12	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
Bale Fork (2 Teeth)														
Bale Fork (3 Teeth)														

Very compatible

Compatible

Not compatible


HAY BALE GRAPPLE

<http://tiny.cc/balegrabber>


FEATURES & BENEFITS

- Gently but firmly grabs round bales without damaging surface wrap
- Automatically centers the load
- Versatile

This grapple is designed to safely and securely lift and move round hay bales up to 160 cm (5.25 ft) in diameter. The two hydraulically operated clamps provide a great grip over a wide surface area without damaging the bale wrap, and automatically center the load for safe and stable travel and handling.

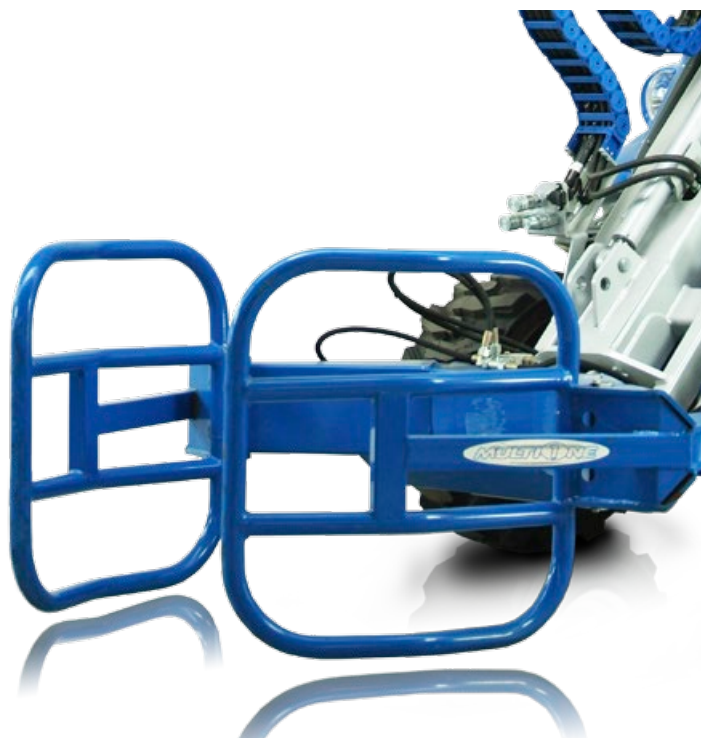

Model	Max bale weight	Min. Diameter for bale	Max. Diameter for bale	Weight	Code
Hay Bale Grapple	1000 kg (2204 lbs)	97 cm (38.2 in)	160 cm (63 in)	130 kg (286.6 lbs)	C890410

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

SQUARE BALE CLAMP



<http://tiny.cc/squarebales>

FEATURES & BENEFITS

- Suitable for bales from 70 cm (2.3 ft) to 245 cm (8 ft)
- 2 cylinders
- No sharp edges

This clamp was designed to transport and stack round and square bales. Made from heavy duty steel, this clamp quickly and easily handles all types of bales, including silage, hay, and straw.

The large clamp arms makes pick-up and storage of all bales sizes quick and easy.

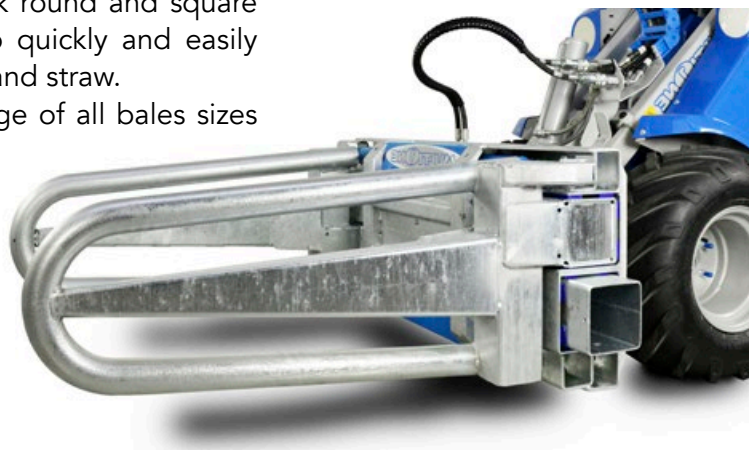

Model	Min bale length	Max bale length	Code
Square Bale Clamp	70 cm (27.5 in)	245 cm (96.5 in)	C890412

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD


RUBBER SCRAPER

<http://tiny.cc/rubberscraper>

FEATURES & BENEFITS

- Heavy duty rubber blade
- Simple and efficient
- The each ends of the scraper blade can be adjusted forwards

The MultiOne rubber scraper is ideal for cleaning smooth surfaces in farm buildings and yards, improving hygiene and footing.



Model	Width	Rubber Height	Weight	Code
150	150 cm (59 in)	35 cm (13.8 in)	73 kg (161 lbs)	C890361
200	200 cm (78.7 in)	35 cm (13.8 in)	60 kg (133 lbs)	C890358

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
150														
200														

Very compatible

Compatible

Not compatible

HORSE ARENA HARROW

<http://tiny.cc/horsearenaharrow>


FEATURES & BENEFITS

- Multi-function surface processing
- Fast end easy to adjust
- Time saving attachment

The horse arena harrow is designed to smooth and level sandy or mixed media horse riding surfaces.

The harrow features multiple processes, beginning with the two sets of spring tines to break up the surface, a leveler to smooth and level the surface, and the compacting and spreader auger roller assembly that finishes the surface. The harrow also has side wheels that enable working along walls with no damage. Easily made adjustments enable weight and balance adjustments between the spring tines and roller/spreader assembly. Height adjustments to enhance processing difficult soils are made quickly and easily.



Model	Width	Weight	Code
110	110 cm (43.3 in)	100 kg (220 lbs)	C891232
160	160 cm (63 in)	180 kg (397 lbs)	C891230

Compatibility	1.1 M14	2.3 MK-MZ	5.20 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
110														
160														

Very compatible

Compatible

Not compatible

SILAGE CUTTING BUCKET

<http://tiny.cc/silagecutting>

FEATURES & BENEFITS

- Ideal for maize silage
- Perfect cut and great visibility
- Combines the advantages of silage grabber and shovel

This unit is a powerful silage cutter. Using two hydraulic cylinders, silage is cut from the silo and taken directly to the cattle. The open design enable great visibility when cutting silage and delivery to the cattle.

The lower tines, mounted to the silage cutter frame, are made from hardened steel, but are easily replaceable. The bucket mounted cutter teeth are also made from hardened steel and can be replaced in minutes.



Model	Width	Weight	Code
Silage cutting bucket	120 cm (47.3 in)	410 kg (904 lbs)	C891051

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD


HORSE STABLE PACKER

<http://tiny.cc/hordestablepacker>

FEATURES & BENEFITS

- Adjustable working width
- Offset left and right

The Horse Stable Packer is a large set of grip tongs for mucking out stalls quickly in a single operation.

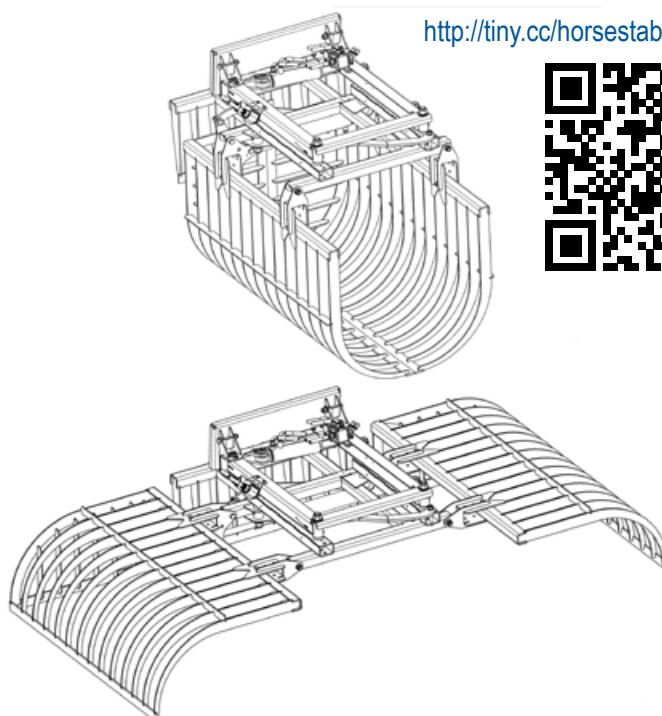

Model	Working Width	Weight	Offset (right / left)	Code
Horse stable packer	290 - 300 cm (114 - 118 in)	300 kg (661 lbs)	100 cm (39 in)	NA

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

FEED DISPENSER

<http://tiny.cc/feeeddispenser>

FEATURES & BENEFITS

- Efficient
- Easy to load
- Fast

MultiOne's animal feed dispensers bucket makes feeding the animals quick and easy. The front edge of the feed dispenser bucket can be used to easily fill up the bucket feeder. Feed is dispensed from the right side discharge chute, using the hydraulically powered auger located at the bottom of the feeder. The feed dispenser is designed to handle any sized grain and mix, making animal feeding a quick and simple process.



Model	Capacity	Width	Weight	Code
350	350 l (12.4 ft ³)	130 cm (51.2 in)	140 kg (309 lbs)	C890420
520	520 l (18.4 ft ³)	180 cm (70.9 in)	210 kg (463 lbs)	C890421

Compatibility	1.1 M14	2.3 MK-MZ	5.20 S525	4.2 S52	5.3 12	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
350														
520														


HIVE HANDLER

<http://tiny.cc/hiveslifter>

FEATURES & BENEFITS

- Smart design
- Easy to use, efficient
- Designed for a special purpose

Ideal design for beekeepers, this unit makes carrying and transporting bee hives quick, easy, and safe. The top frame stabilizes the hives, securing them onto the bottom forks. Different sizes are available, suited to various hive styles.



Model	Length	Height	Max load capacity	Weight	Code
160	105 cm (41.3 in)	90/160 cm (35.4/63 in)	1000 kg (2204 lbs)	150 kg (330 lbs)	C890690
240	105 cm (41.3 in)	135/240 cm (53.1/94.5 in)	1000 kg (2204 lbs)	150 kg (330 lbs)	C890691

Compatibility	1.1 M14	2.3 MK-MZ	5.20 S525	4.2 S52	5.3 12	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
160														
240														

Very compatible

Compatible

Not compatible



DOZER BLADE

<http://tiny.cc/dozerblade>


FEATURES & BENEFITS

- Rugged design delivers maximum uptime
- Dozer blade can be angled 30 degrees left and right

The rugged design of the dozer blade makes a wide variety of jobs, from scraping hard soils, to grading and stacking loose soils, quick and easy.

An ideal tool for projects from rough construction through fine landscaping.



Model	Width	Slewing angle	Height	Weight	Code
140	140 cm (55.1 in)	±30°	53 cm (20.8 in)	90 kg (198 lbs)	C890470
180	180 cm (71 in)	±30°	53 cm (20.8 in)	105 kg (232 lbs)	C890477


Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
140														
180														

Very compatible

Compatible

Not compatible

TRENCHER

<http://tiny.cc/trencher>


FEATURES & BENEFITS

- Slide equipped for easy depth control
- High quality trenching

This machine creates trenches with minimal damage to lawns and gardens. With the trencher, clean trenches are quickly created regardless of the ground conditions. Trouble free operation is assured through the planetary final drive and heavy duty hydraulic motor. If the trenching being done is in vegetative ground, the standard trencher is the best choice, if the ground is hard and rocky, select the HD version.



Model	Digging Depth	Digging Width	Weight	Code
Trencher 60 (for normal ground)	60 cm (23.6 in)	14 cm (5.5 in)	175 kg (386 lbs)	C890200
Trencher 90 (for normal ground)	90 cm (35.4 in)	16 cm (6.3 in)	190 kg (419 lbs)	C890201
Trencher 120 (for normal ground)	120 cm (47.2 in)	18 cm (7 in)	203 kg (448 lbs)	C890202
Heavy duty trencher 60 (for hard ground)	60 cm (23.6 in)	12 cm (4.7 in)	180 kg (397 lbs)	C890203
Heavy duty trencher 90 (for hard ground)	90 cm (35.4 in)	12 cm (4.7 in)	195 kg (430 lbs)	C890204
Heavy duty trencher 120 (for hard ground)	120 cm (47.2 in)	12 cm (4.7 in)	215 kg (474 lbs)	C890205


Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT960	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
60	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
90	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
120	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
60 HD	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
90 HD	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
120 HD	Very compatible	Very compatible	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

Very compatible

Compatible

Not compatible

MINI DIGGER

<http://tiny.cc/minidigger>


FEATURES & BENEFITS

- Easy to use
- Effective and usefull

The mini digger is an efficient solution for small excavating projects. Through the use of the standard MultiOne controls, excavating operations are simple and effective.



Model	Length	Weight	Code
Mini-digger with bucket 25 cm (9.8 in)	130 cm (51.2 in)	70 kg (154 lbs)	C890116
Mini-digger with bucket 40 cm (15.7 in)	150 cm (59 in)	80 kg (176 lbs)	C890115
Options			
Bucket 25 cm (9.8 in) 2d only for C890115		25 kg (55 lbs)	C890111
Bucket 40 cm (15.7 in) 3d only for C890115		35 kg (77 lbs)	C890112
Bucket 70 cm (27,5 in) 5d only for C890115		47 kg (104 lbs)	C890113
Bolt-on tooth kit (each) d		1,7 kg (3.7 lbs)	C890007


Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT95D	9.6 GT96D	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
25														
40														

Very compatible

Compatible

Not compatible

BACKHOE

<http://tiny.cc/backhoe>


FEATURES & BENEFITS

- **Powerful backhoe, with 180° rotation**
- **Excellent visibility of the digging area**

The MultiOne backhoe is a compact yet powerful excavator. It's ideal for landscaping and nursery projects, sewage system and septic tank excavating, water and power line trenching, and many other excavating projects. Using MultiOne's quick mount system, this backhoe is quick and easy to attach. A standard part of the backhoe are the independent operator's seat and hydraulic controls.

	A	B	C	D	E	F	G	H	I	L	M
215	2702 mm (106.4 in)	1766 mm (69.5 in)	2709 mm (106.6 in)	729 mm (28.7 in)	1890 mm (74.4 in)	1749 mm (68.8 in)	2135 mm (84 in)	2212 mm (87 in)	85°	172°	266 mm (10.5 in)
260	3141 mm (123.6 in)	2219 mm (87.4 in)	3204 mm (126 in)	931 mm (36.6 in)	2081 mm (81.9 in)	1984 mm (78.1 in)	2583 mm (101.7 in)	2671 mm (105 in)	85°	172°	266 mm (10.5 in)

Model	Digging Depth	Width	Weight	Code
Backhoe 215 with bucket 40	215 cm (84.6 in)	/	530 kg (1168 lbs)	C890117
Backhoe 260 with bucket 40	260 cm (102.4 in)	/	600 kg (1322 lbs)	C890120

Options

Bucket 25 - 2d	/	25 cm (9.8 in)	25 kg (55 lbs)	C890111
Bucket 40 - 3d	/	40 cm (15.7 in)	35 kg (77 lbs)	C890112
Bucket 70 - 5d	/	70 cm (27.5 in)	47 kg (104 lbs)	C890113
Bolt-on tooth kit (each) d	/	/	1,7 kg (3.7 lbs)	C890007

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
215														
260														


Very compatible

Compatible

Not compatible



AUGER

<http://tiny.cc/auger>


FEATURES & BENEFITS

- Wide range of auger drive units with different torques enables efficient use of 10 cm (4 in) to 100 cm (40 in) augers
- Augers with tungsten teeth available

The powerful hydraulic auger drive unit, combined with various auger diameters, provide excellent flexibility in all soil types.

The auger drive is available in three versions:

- T1 for normal soil conditions
- T2 for hard, rocky ground, used with augers up to 50 cm (20 in)
- T3 for hard, rocky ground, used with augers up to 100 cm (40 in)



Model	Torque	Drills	Weight	Code
T1 – standard drive unit	100 kgm	10-50 cm (4 - 19.7 in)	90 kg (198 lbs)	C890830
T2 – heavy duty drive unit	180 kgm	10-50 cm (4 - 19.7 in)	110 kg (242 lbs)	C890831
T3 – heavy duty drive unit	400 kgm	30 - 100 cm (11.8 - 39.4 in)	150 kg (331 lbs)	C890832

Compatibility	1.1 M14	2.3 MK-MZ	3.520 S525	4.2 S12	5.3 S12	6.3	7.3	8.4	9.5 GT80	9.6 GT80	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Auger														
T1														
T2														
T3														


Very compatible

Compatible

Not compatible


OPTIONS FOR AUGER

Heavy Duty Auger Drill	Diameter	Length	Weight	Code
10	10 cm (4 in)	100 cm (39.4 in)	10 kg (22 lbs)	C890840
15	15 cm (6 in)	100 cm (39.4 in)	15 kg (33 lbs)	C890841
20	20 cm (7.9 in)	100 cm (39.4 in)	20 kg (44 lbs)	C890842
25	25 cm (9.8 in)	100 cm (39.4 in)	30 kg (66 lbs)	C890843
30	30 cm (11.8 in)	100 cm (39.4 in)	35 kg (77 lbs)	C890844
35	35 cm (13.8 in)	100 cm (39.4 in)	40 kg (88 lbs)	C890845
40	40 cm (15.7 in)	100 cm (39.4 in)	47 kg (104 lbs)	C890846
50	50 cm (19.7 in)	100 cm (39.4 in)	56 kg (124 lbs)	C890847
60	60 cm (23.6 in)	100 cm (39.4 in)	66 kg (146 lbs)	C890849
70	70 cm (27.6 in)	100 cm (39.4 in)	76 kg (168 lbs)	C890851
80	80 cm (31.5 in)	100 cm (39.4 in)	86 kg (190 lbs)	C890853
90	90 cm (35.4)	100 cm (39.4 in)	96 kg (212 lbs)	C890855
100	100 cm (39.4 in)	100 cm (39.4 in)	106 kg (234 lbs)	C890857
Auger Drill w/tugsten teeth Rock Drill	Diameter	Length	Weight	Code
15	15 cm (6 in)	100 cm (39.4 in)	20 kg (44 lbs)	C890880
20	20 cm (7.9 in)	100 cm (39.4 in)	25 kg (55 lbs)	C890881
25	25 cm (9.8 in)	100 cm (39.4 in)	30 kg (66 lbs)	C890882
30	30 cm (11.8 in)	100 cm (39.4 in)	35 kg (77 lbs)	C890883
35	35 cm (13.8 in)	100 cm (39.4 in)	40 kg (88 lbs)	C890884
40	40 cm (15.7 in)	100 cm (39.4 in)	47 kg (104 lbs)	C890885
50	50 cm (19.7 in)	100 cm (39.4 in)	56 kg (124 lbs)	C890886
60	60 cm (23.6 in)	100 cm (39.4 in)	66 kg (146 lbs)	C890888
70	70 cm (27.6 in)	100 cm (39.4 in)	76 kg (168 lbs)	C890890
80	80 cm (31.5 in)	100 cm (39.4 in)	86 kg (190 lbs)	C890892
90	90 cm (35.4)	100 cm (39.4 in)	96 kg (212 lbs)	C890894
100	100 cm (39.4 in)	100 cm (39.4 in)	106 kg (234 lbs)	C890896
Auger Drill Extension	Diameter	Length	Weight	Code
10	10 cm (4 in)	100 cm (39.4 in)	15 kg (33 lbs)	C890860
15	15 cm (6 in)	100 cm (39.4 in)	20 kg (44 lbs)	C890861
20	20 cm (7.9 in)	100 cm (39.4 in)	25 kg (55 lbs)	C890862
25	25 cm (9.8 in)	100 cm (39.4 in)	30 kg (66 lbs)	C890863
30	30 cm (11.8 in)	100 cm (39.4 in)	35 kg (77 lbs)	C890864
35	35 cm (13.8 in)	100 cm (39.4 in)	40 kg (88 lbs)	C890865
40	40 cm (15.7 in)	100 cm (39.4 in)	47 kg (104 lbs)	C890866
50	50 cm (19.7 in)	100 cm (39.4 in)	56 kg (124 lbs)	C890867
60	60 cm (23.6 in)	100 cm (39.4 in)	66 kg (146 lbs)	C890869
70	70 cm (27.6 in)	100 cm (39.4 in)	76 kg (168 lbs)	C890871
80	80 cm (31.5 in)	100 cm (39.4 in)	86 kg (190 lbs)	C890873
90	90 cm (35.4)	100 cm (39.4 in)	96 kg (212 lbs)	C890875
100	100 cm (39.4 in)	100 cm (39.4 in)	106 kg (234 lbs)	C890877



- **Optional laser control package for precise grade control**

The grader attachment converts the MultiOne into a high performance grading system, well suited for confined areas not accessible to larger machines. The hydraulically controlled moldboard is controlled using the cab mounted auxiliary controls. To increase the grader efficiency and precision, the MultiOne's grader can be equipped with an optional laser control system.

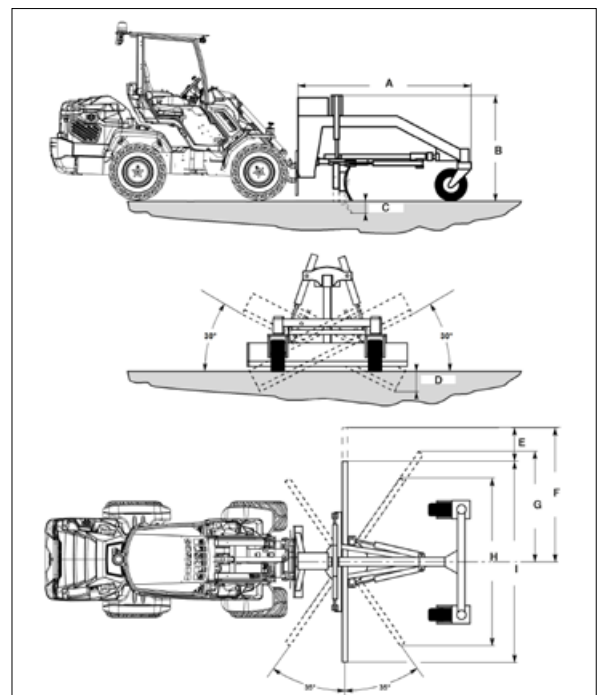

	A	B	C	D	E	F	G	H	I
mm	2220	1320	165	355	400	1466	1090	1735	2130
in	87.4	51.9	6.5	14	15.7	57.7	42.9	68.3	83.8

Model	Blade width	Weight	Code
Grader with hydraulic controls	210 cm (82.7 in)	550 kg (1212 lbs)	C890105
Laser (only receiver) twin angle	/	/	C890106

[illegible]


CEMENT MIXER

<http://tiny.cc/cementmixer>

FEATURES & BENEFITS

- Faster than a stand alone mixer
- Designed to work in hard-to-reach areas

The hydraulically powered cement mixer is an inexpensive attachment that lets you mix, transport, and pours concrete faster than a stand-alone mixer. This unit's compact size makes it the ideal tool when working on sidewalks, driveways, footings, small building floors, and other hard-to-reach or limited access areas.



Model					Volume				Weight			Code		
Cement Mixer					350 l (12.4 ft³)				95 kg (210 lbs)			C890131		
Compatibility	1.1	2.3	S520	4.2	5.3	6.3	7.3	8.4	9.5	9.6	10.8	6.3SD	7.3SD	9.5SD
	M14	MK-MZ	S525	5.2	7.2				GT980	GT980	10.9		8.4SD	


CONCRETE MIXING BUCKET

<http://tiny.cc/concretemixingbucket>

FEATURES & BENEFITS

- Hydraulically powered mixing and unloading system
- Self loading profile
- Removable safety grill promotes easy cleaning and maintenance

The concrete mixing bucket allows the operator to load, mix, transport, and discharge concrete much faster than the traditional stand-alone mixer and wheel barrow. This unit's compact size, when combined with the MultiOne, makes it ideal for pouring sidewalks, driveways, footings, small buildings floors, and many other limited access locations. Designed for high volume production, this unit minimizes downtime. Combined with the MultiOne, it becomes an efficient, reliable, and cost efficient system.



Model	Volume	Outlet Ø	Hose Length	Weight	Code
200	200 l (7 ft³)	13,5 cm (5.3 in)	160 cm (63 in)	220 kg (485 lbs)	C890140
250	250 l (8.8 ft³)	18 cm (7.1 in)	150 cm (59 in)	320 kg (706 lbs)	C890141

Compatibility	1.1	2.3	S520	4.2	5.3	6.3	7.3	8.4	9.5	9.6	10.8	6.3SD	7.3SD	9.5SD
	M14	MM-MZ	S525	5.2	7.2				GT980	GT980	10.9		8.4SD	
Model														
200														
250														

Very compatible

Compatible

Not compatible



PAVER FINISHER

<http://tiny.cc/paverfinisher>

FEATURES & BENEFITS

- Cost-effective
- High working speed
- The hopper is easily filled directly from the delivery truck
- Compact dimensions

The MultiOne paver finisher is an efficient and flexible attachment. Can be used to lay asphalt, gravel, and sand.

It is an ideal tool for quickly creating paved pathways, sidewalks, and even parking lots with a minimum of manual labor.



Model	Volume	Width	Weight	Code
Paver Finisher	400 l (14.2 ft ³)	100 cm (39.4 in)	270 kg (595 lbs)	C890150

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

COLD PLANER

<http://tiny.cc/coldplaner>


FEATURES & BENEFITS

- Increased cold planing ability
- Planer drum improves planer efficiency

Ideal design for milling damaged asphalt and concrete surfaces in preparation for resurfacing.

The cold planer can be converted from surface planing to slot cutting. Use a cutting disk for cutting expansion crack slots, or slots for embedding wires or tubing.

The standard planer drum, equipped with carbide cutting teeth and the self leveling suspension, efficiently planes the pavement surface.



Model	Digging depth	Max width	Weight	Code
Cold Planer	15 cm (6 in)	35 cm (13.8 in)	620 kg (1367 lbs)	C890160
Cutting disc	15 cm (6 in)	7,5 cm (3 in)	/	C890162

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

HYDRAULIC BREAKER

<http://tiny.cc/hydraulicbreaker>

FEATURES & BENEFITS

- True hydraulic hammer operating cycle
- Low recoil
- High power-to-weight ratio

The narrow breaker profile enables the breaker to reach into places that other breakers can't. With a minimum of seals and moving parts, the MultiOne hydraulic breaker provides unsurpassed durability and simplified maintenance.



Model	Impact energy	Impact rate	Weight	Code
62	140 J	1000/1250 bpm	62 kg (137 lbs)	C890181
90	190 J	1000/1300 bpm	90 kg (198 lbs)	C890180

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
62														
90														

DEMOLITION JAW

<http://tiny.cc/demolitionjaw>

FEATURES & BENEFITS

- Powerful
- Low noise attachment
- 360° hydraulic rotation
- Works where other tools would be restricted

Powerful, hydraulically operated crushing jaws can pick-up and crush concrete with ease. The cutter jaw portion of the machine can cut rebar, wire mesh, angle iron, and I-beams.

Low levels of vibration and noise enable the demolition jaw to complete concrete demolition projects in restricted areas.



Model	Max jaws opening	Max power at the tips	Max cutting power	Rotation	Weight	Code
Demolition jaw	43 cm (16.9 in)	335 kN	920 kN	360° (endlessly)	200 kg (440 lbs)	C891250

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

CRUSHER BUCKET

<http://tiny.cc/crushingbucket>

FEATURES & BENEFITS

- Crushes all demolished stone materials
- Crushes materials directly on site
- Easy and fast processing
- Recycle project materials on-site, saving time and money

The MultiOne crusher bucket easily crushes concrete, stone, or asphalt, making ready to use product on the job site.

The self loading design can discharge the crushed material directly where it is needed.

The crusher bucket is not hampered by wet, muddy, or dirty debris.

The crusher bucket, when attached to a MultiOne, can work in almost any project location, from industrial to urban areas, road projects to mines and quarries, and more.



Model	Volume	Width	Oil Flow	Oil Pressure	Weight	Code
Crusher Bucket	300 l (10.6 ft ³)	140 cm (55 in)	40-80 l/min (10.6-21.1 gal/min)	150-300 bar	570 kg (1256 lbs)	C891261

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

SCREENING BUCKET


<http://tiny.cc/screeningbucket>

FEATURES & BENEFITS

- Heavy duty construction
- Easy and fast processing
- Separate project materials on-site, saving time and money

The MultiOne screening bucket separates different sized materials thanks to its unique construction. The purpose of the screening bucket is to separate larger and smaller particles from the soil and not crush the larger material into smaller particles.

Topsoil making for landscaping, nurseries and wholesale is the principal use while some construction contractors utilise the bucket for screening.

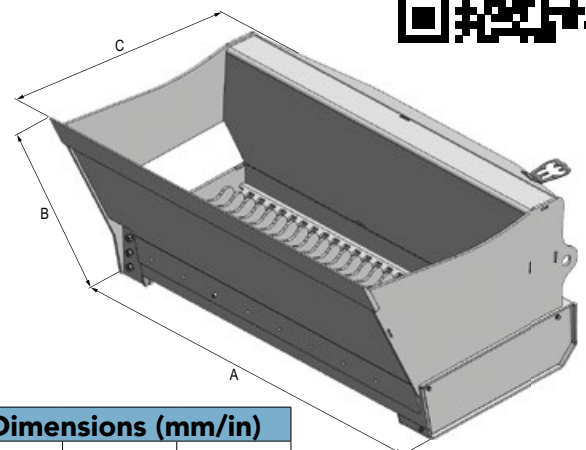

Dimensions (mm/in)		
A	B	C
1200 / 47.2	720 / 28.3	620 / 24.4

Model	Volume	Width (A)	Screened materials Ø	Weight	Code
Screening bucket	186 l (6.6 ft ³)	120 cm (47.2 in)	0/20-0/35 mm (0/0.8 - 0/1.4 in)	320 kg (705 lbs)	C890030

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3	6.3 7.2	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

SWEEPER

<http://tiny.cc/sweeper2>


FEATURES & BENEFITS

- **Powerful sweeper for large areas**

Whether traveling forward or backwards, this attachment quickly and quietly sweeps and collects dirt and debris, and easily dumps out the refuse. Perfect system for cleaning parking lots, sidewalks, loading docks, warehouses, and more. The MultiOne sweeper is equipped with a floating attachment bracket and 4 support wheels that guarantee smooth and easy sweeping operations. The sweeping angle is manually adjusted. Optional: 1) Collection box with manual opening lever. 2) Dust reduction water spray system is made up of a 12V electric pump, 4 spray nozzles, and a 70 L (18.5 gal) water tank. 3) A single 500 mm (20 in) hydraulically driven side brush can be mounted on the right side of the collection box. 4) Collection box opening hydraulic kit.

Model	Diameter	Width	Volume	Weight	Code
Sweeper 100	48 cm (18.9 in)	100 cm (39.4 in)	/	130 kg (286.6 lbs)	C895000
Sweeper 120	48 cm (18.9 in)	120 cm (47.2 in)	/	153 kg (337 lbs)	C890220
Sweeper 150	48 cm (18.9 in)	150 cm (59 in)	/	173 kg (381 lbs)	C890223
Waste box for Sweeper 100	/	100 cm (39.4 in)	70 l (2.5 ft ³)	40 kg (88.2 lbs)	C895001
Waste box for Sweeper 120	/	120 cm (47.2 in)	90 l (3.2 ft ³)	50 kg (110 lbs)	C890221
Waste box for Sweeper 150	/	150 cm (59 in)	120 l (4.2 ft ³)	57 kg (125.6 lbs)	C890224
Humidification kit for Sweeper 120			70 l (18.5 gal)		C890222
Humidification kit for Sweeper 150			140 l (37 gal)		C890225
Side brush for Sweeper 120 and 150					C890226
Collection box opening hydraulic kit for Sweeper 120 and 150					C890228

Compatibility	1.1 M14	2.3 MK-MZ	3.520 S525	4.2 S2	5.3 S2	6.3	7.3	8.4	9.5 GT80	9.6 GT80	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
100														
120														
150														

Very compatible

Compatible

Not compatible


ROTARY BROOM

<http://tiny.cc/rotarybroom>

FEATURES & BENEFITS

- Remotely controlled hydraulic angle adjustment
- Long lasting bristle material

Dirt, dried mud, light snow and other debris are quickly and efficiently swept away with this hydraulically driven attachment. Whether you're sweeping driveways, farm yards or warehouses, you can rely on the rotary broom to get the job done right.



Model	Brush diameter	Brush material	Width	Weight	Code
130	60 cm (23.6 in)	nylon	130 cm (51.2 in)	160 kg (353 lbs)	C890241
160	60 cm (23.6 in)	nylon	160 cm (63 in)	190 kg (419 lbs)	C890242

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
130														
160														

VACUUM SWEEPER

<http://tiny.cc/vacuumsweeper>

FEATURES & BENEFITS


- Powerful vacuum sweeper for large areas
- Side brush available
- Water spray to reduce dust

The vacuum sweeper sweeps and collects dirt and debris. When done with the sweeping procedures, the collected refuse is easily dumped out. MultiOne's vacuum sweeper is perfect for cleaning parking lots, sidewalks, loading docks, and warehouses. The floating attachment bracket and three support wheels assure smooth operation. The rotary side brushes are hydraulically powered, with brush positioning hydraulically controlled as well.

The vacuum filter is equipped with a cleaning system that uses vibrations to keep it clean and efficient.

Optional equipment:

- Water spray system: 12V electric water pump, spray nozzles, and large water tank.



Model	Brush diameter	Max Width	Min Width	Volume	Weight	Code
Vacuum Sweeper	/	160 cm (63 in)	120 cm (47.2 in)	/	/	NA
Humidification kit	/	/	/	/	/	NA

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

LEAF VACUUM

<http://tiny.cc/leafvacuum>

FEATURES & BENEFITS

- Powerful vacuum
- Rotary side brush
- 5 m (16 ft) hand hose available

This attachment creates tremendous suction for collecting leaves, grass clippings, and other loose debris. The rotary side brush extends the cleaning area.

The option hand held hose allows you to clean tight work areas, flower beds, along fences, and many other hard-to-reach locations.

The leaf vacuum is equipped with a hydraulically opening door for easy disposal of the collected debris.



Model	Hose Ø	Hose length	Width	Weight	Code
Leaf vacuum	/	/	100 cm (39,4 in)	155 kg (342 lbs)	C890239
Hose	180 mm (7 in)	5 m (16 ft)	/	/	C890245
Side brush 48 cm (18,9 in) nylon	/	/	/	/	/

Compatibility	1-1 M14	2-3 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10-8 10-9	6-3SD	7-3SD 8-4SD	9-5SD

WEED BRUSH

<http://tiny.cc/weedbrush>

FEATURES & BENEFITS

- Brush with steel bristles
- Powerful hydraulic motor
- Manual angle adjustment

A hydrostatic drive motor, adjustable tilt, and a specially designed brush are combined to create an effective system to remove weed and plant growth for pavement joints.

The brush angle adjustment allows easy cleaning along walkway edges or along and in wall areas.

The weed brush is an effective tool for cleaning walkways, bike paths, car parks, school yards, general sweeping and even frozen ice and snow, making this a very flexible addition to your maintenance fleet.



Model	Brush diameter	Weight	Code
Weed brush	58 cm (22.8 in)	95 kg (209 lbs)	C890270

Compatibility	1-1 M14	2-3 MK-MZ	S520 S525	4-2 5-2	5-3 7-2	6-3	7-3	8-4	9-5 GT980	9-6 GT980	10-8 10-9	6-3SD	7-3SD 8-4SD	9-5SD

Very compatible

Compatible

Not compatible

SNOW BLADE

<http://tiny.cc/snowblade>


FEATURES & BENEFITS

- Efficient on larger areas, but compact enough to clear smaller spaces
- Heavy duty construction

An excellent tool to quickly clear light or moderate snow from sidewalks and driveways. Equipped with shock absorbing system that allow the blade to trip forward when an obstacle is encountered, saving wear and tear on the blade and MultiOne.
30° hydraulically controlled tilt.



Model	Width	Blade height	Slewing angle	Weight	Code
140	140 cm (55 in)	53 cm (20.8 in)	±30°	121 kg (267 lbs)	C890476
180	180 cm (71 in)	58 cm (22.8 in)	±30°	156 kg (344 lbs)	C890475

Compatibility	1.1 M14	2.3 MK-MZ	3.520 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT880	9.6 GT880	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
140														
180														

Very compatible

Compatible

Not compatible

SNOW BLOWER

<http://tiny.cc/snowblower>


FEATURES & BENEFITS

- Efficient two-stage snow blowers
- The blower fan and auger are equipped with hydraulic motors, eliminating high wear parts such as belts and chains

The snow blower is an efficient method to remove large amounts of snow from sidewalks, roads, or other large areas when snow needs to be spread out evenly. The two-stage blower provides a powerful and efficient snow removal tool, even if the snow is wet and heavy. To achieve this efficiency, the auger breaks up the snow and the fan throws the snow out of the discharge chute. The chute can be rotated 200° from the operator's seat, with the discharge chute height angle manually adjusted.



Model	Width	Rotation	Weight	Code
100	100 cm (39.4 in)	200°	70 kg (154 lbs)	C890453
130 HD (Heavy Duty)	130 cm (51.2 in)	200°	150 kg (331 lbs)	C890472
140	140 cm (55.1 in)	200°	220 kg (485 lbs)	C890455
160 HD (Heavy Duty)	160 cm (63.0 in)	200°	250 kg (551 lbs)	C890460
180 HD (Heavy Duty)	180 cm (70.9 in)	200°	280 kg (618 lbs)	C890466


Compatibility	1/1 Mi14	2/3 MK-MZ	S520 S525	4/2 S12	5/3 T2	6/3	7/3	8/4	9/5 G1360	9/6 G1360	10/8 10/9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
100	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
130 HD	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
140	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
160 HD	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible
180 HD	Very compatible	Very compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible	Compatible

Very compatible

Compatible

Not compatible

SNOW PLOW

<http://tiny.cc/snowplow1>


FEATURES & BENEFITS


- Rugged professional grade snow plow
- 5 configurations

This versatile, hydraulically operated snow plow offers 5 different blade operating positions:

- 30° right
- 30° left
- Straight
- Scoop
- V-plow

The plow controls features on-the-go fingertip adjustments to plow through the deepest snow.

Equipped with shock absorbing springs that allow the blade to trip forward when an obstacle is encountered, saving wear and tear on the blade and MultiOne.

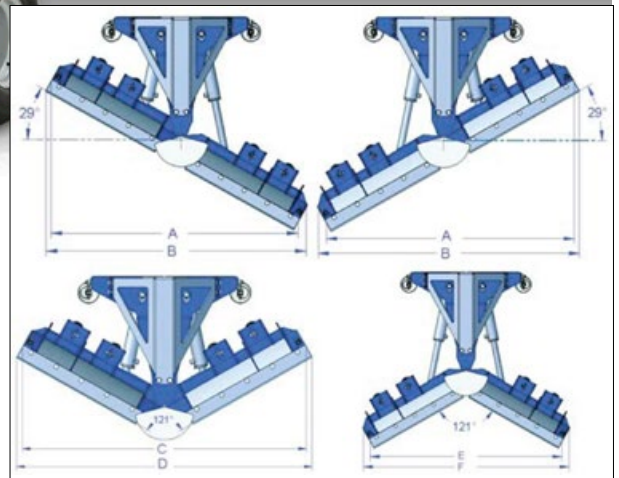


Model	A (mm/in)	B (mm/in)	C (mm/in)	D (mm/in)	E (mm/in)	F (mm/in)
150-170	1465 / 57.7	1545 / 60.8	1550 / 61	1610 / 63.4	1380 / 54.3	1480 / 58.3
200-230	1980 / 78	2065 / 81.3	2065 / 81.3	2125 / 83.7	1900 / 74.8	2000 / 78.7

C891320



C891325



Model	Blades Width	Blades height	Slewing angle	Weight	Code
150-170	150-170 cm (59-67 in)	29.5 in (75 cm)	±30°	350 kg (772 lbs)	C891300
200-230	200-230 cm (78.7-90.5 in)	29.5 in (75 cm)	±30°	420 kg (926 lbs)	C891310

Accessories

	Code
Floating Adapter for Snow Plow	C891320
Extension Wings 20+20 cm (7.9+7.9 in) only for C891310	C891325

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
150-170														
200-230														

Very compatible

Compatible

Not compatible

TRAILER

<http://tiny.cc/trailerrimorchio>

FEATURES & BENEFITS

- **Robust and versatile dump trailers, ideal for earthmoving and other lighter duty jobs**

MultiOne trailers are useful for transporting garden waste, top soil, mulch, etc. Equipped with pintle a style hitch and parking brake. Available with either manual or hydraulic dump system.

- **MANUAL DUMP VERSION** Agricultural trailer with the manual dump system. Rear gate can be opened. Available in one size.
- **HYDRAULIC DUMP VERSION** Heavy duty trailer equipped with a hydraulic dump system powered by the MultiOne. Side and rear gates can be opened. Available in two sizes.



Model	Max load	Length	Width	Height	Tipping	Weight	Code
800	800 kg (1764 lbs)	115 cm (45.3 in)	150 cm (59 in)	30 cm (12 in)	manual	90 kg (198 lbs)	C890770
1300	1300 kg (2866 lbs)	200 cm (78.7 in)	140 cm (55.2 in)	35 cm (13.8 in)	hydraulic	150 kg (331 lbs)	C890775
1600	1600 kg (3527 lbs)	220 cm (86.6 in)	150 cm (59 in)	35 cm (13.8 in)	hydraulic	250 kg (551 lbs)	C890776

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
800														
1300														
1600														

HIGH PRESSURE WASHER

<http://tiny.cc/highpressurewasher>

FEATURES & BENEFITS

- **Efficient high pressure, self contained washer system**
- **Equipped with a hand held spray wand with a 10 m (33 ft) hose**

High pressure washers are perfect for cleaning construction sites and general maintenance. The powerful 170 bar (2,465 psi) pressure jet cleans dirt, built up and dry mud, waxes, oils, grease, strips old paint, and more from any surface.

This pressure washer system, combined with the on-board 200 l (53 gal) water tank, makes cleaning buildings and graffiti removal an efficient process.

Using the MultiOne's hydraulic power and portability, this self contained pressure washer system effectively works in remote locations.



Model	Pressure	Volume	Hydraulic power	Pipe length	Weight	Code
High pressure washer	170 bar	200 l (52.8 gal)	35 l/min (9.2 GPM)	10 m (32.8 ft)	75 kg (166 lbs)	C891200

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible



SALT AND SAND SPREADER

<http://tiny.cc/saltspreader>


FEATURES & BENEFITS

- Fast and reliable attachment
- Rubber cover included
- 180° spread angle
- Available as either an attachment plate mount or as a towed unit
- Multi sector limiter available for more precise spreading
- The attachment plate mounted unit has a hydraulically powered spinner
- The tow behind units spinner plate is powered by an axle mounted planetary gear

This unit is an ideal winter time tool to spread ice control products on parking lots and pedestrian areas. Can also be used in the warmer months to spread seed and fertilizer. The discharge pattern is easily adjusted with a lever adjusted professional style multi-sector limiter.



Model	Volume	Max load	Max Spreading Width Granular	Max Spreading Width Crystalline	Weight	Code
Towed centrifugal	200 l (7 ft³)	200 kg (441 lbs)	12 – 14 m (39 – 46 ft)	6 – 7 m (20 – 23 ft)	80 kg (176 lbs)	C890186
Centrifugal stainless steel	200 l (7 ft³)	200 kg (441 lbs)	12 – 14 m (39 – 46 ft)	6 – 7 m (20 – 23 ft)	54 kg (119 lbs)	C890185
Accessories						Code
Multi sector limiter						C890187

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
Towed centrifugal														
Centrifugal stainless steel														

Very compatible

Compatible

Not compatible


STAKE INSTALLER

<http://tiny.cc/stakeinstaller>

FEATURES & BENEFITS

- Efficient and time saving
- Powerful attachment

The stake installer attachment lets you use your MultiOne mini loader to rapidly drive stakes into the ground with minimal ground preparation. The specially designed tool holds a fence stake while a hydraulically powered vibratory hammer pounds the stake into the ground. The MultiOne boom enables the efficient handling of long stakes.



Model	Impact energy	Impact rate	Weight	Code
Stake installer	140 J	1000/1250 bpm	120 kg (265 lbs)	C890780

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

AERIAL WORK PLATFORM

<http://tiny.cc/aerialworkplatform>

FEATURES & BENEFITS

- MultiOne carries the platform anywhere
- Independent from external power source
- Quick and versatile

The MultiOne aerial work platform is attached to the MultiOne by the coupling plate. The safe working load for the aerial work platform is 120 kg (265 lbs), which makes it ideal for one man and plenty of tools.

This platform is a cost effective system that enables reaching working heights up to 8,4 – 9,8 m (27.5 – 32 ft).

This portable platform is suitable for building repairs, painting, light bulb replacement, general maintenance, and more.




Model	Platform height	Lift Capacity	Basket size	Working height	Total dimensions	Weight	Code
PID 8,5	6,5 m (21,3 ft)	120 kg (265 lbs)	65x65 cm (25.6x25.6 in)	8,4 m (27.5 ft)	130x70 cm (51.2x27.5 in)	345 kg (760 lbs)	C895150
PID 10	7,8 m (25,6 ft)	120 kg (265 lbs)	65x65 cm (25.6x25.6 in)	9,8 m (32 ft)	130x70 cm (51.2x27.5 in)	350 kg (772 lbs)	C895151

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Lifting platform														
PID 8,5														
PID 10														

Very compatible

Compatible

Not compatible



FEATURES & BENEFITS

- 360 degree 12V nozzle rotation from operators position
- Nozzle options for specific applications
- Heavy-duty frame construction

The debris and leaf blower provides great air volume flow and the capability to rotate the nozzle 360 degrees from the operator's seat.

This blower delivers superior productivity and greater efficiency in jobs ranging from cleaning sidewalks, streets, car parking and other maintained paved areas, to blowing grass clippings, leafs, snow, sand or other debris off fairways or greens.



Model	Min - Max Flow Rate	Dimensions with Nozzle (LxWxH)	Weight	Code
Debris and leaf blower	49 - 94.6 l/min (13 - 25 GPM)	163 x 117 x 82 cm (64 x 46 x 32 in)	136 kg (300 lbs)	C892000
Options				
1	90° polymer nozzle			C892001
2	Long rectangular nozzle end			C892002
3	Short rectangular nozzle end			C892003


Compatibility	1.1 M14	2.3 MK-MZ	5.20 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT850	9.6 GT860	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

STREET WASHER

<http://tiny.cc/streetwasher>


FEATURES & BENEFITS

- High water pressure
- The spray bars can be tilted up at 90°
- Includes a hand spray wand with 10 m (32 ft) hose on a storage reel
- High capacity tank

MultiOne Street Washer is the best solution for quickly cleaning public roads, town centers, car parks, market squares, large industrial areas, resort walkways, and wherever hygiene is required.



Model	Spray Bar Width	Tank Capacity	Water pressure	Nozzles	Pipe Length	Weight	Code
300	150 cm (59 in)	300 l (79.2 gal)	150 bar	3	/	60 kg (132 lbs)	C890750
600	250 cm (98.4 in)	600 l (158.5 gal)	150 bar	5	/	75 kg (165 lbs)	C890751

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Street Washer														
300														
600														

Very compatible

Compatible

Not compatible



FLAIL MOWER WITH SIDE SHIFT


<http://tiny.cc/flailmowerside>



FEATURES & BENEFITS

- Hydraulic side shift and angle control flail mower
- Powerful attachment

Use this hydraulically powered flail mower with side shift for heavy shrubs and weeds, and see what it can do! Not only is its heavy duty construction, combined with the power and stability of the MultiOne, perfect for use on slopes, it's also perfect for mulching in parks and other hard to reach places. Features: 1) Standard in-line front flail mower. 2) Offset length (174 cm / 68.5 in). 3) To -45° angle ditch mower. 4) To +90° angle bank and hedge mower.

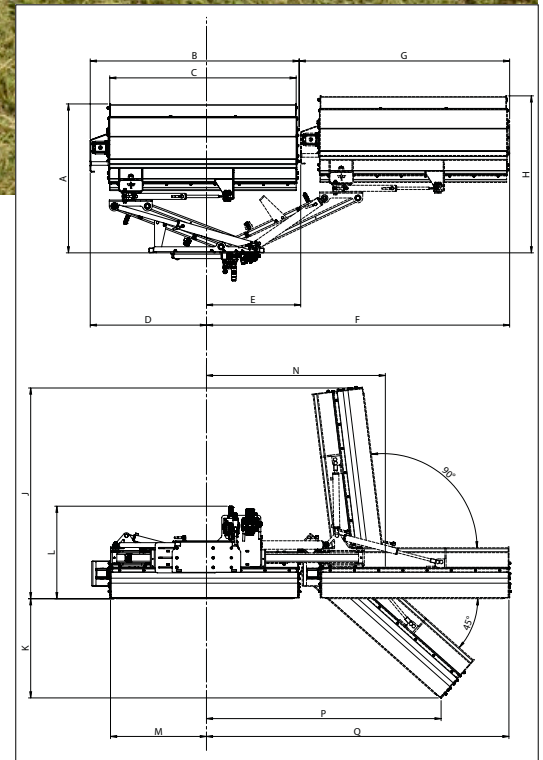

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
105	1230 mm (48.4 in)	1276 mm (50.2 in)	1090 mm (42.9 in)	960 mm (37.8 in)	778 mm (30.6 in)	2054 mm (80.9 in)	1738 mm (68.4 in)	1297 mm (51 in)	1294 mm (51 in)	526 mm (20.7 in)	764 mm (30 in)	792 mm (31.2 in)	1477 mm (58.1 in)	1592 mm (62.7 in)	2148 mm (84.6 in)
125	1230 mm (48.4 in)	1426 mm (56.1 in)	1240 mm (48.8 in)	960 mm (37.8 in)	778 mm (30.6 in)	2204 mm (86.8 in)	1738 mm (68.4 in)	1297 mm (51 in)	1443 mm (56.8 in)	626 mm (24.6 in)	764 mm (30 in)	792 mm (31.2 in)	1477 mm (58.1 in)	1704 mm (67.1 in)	2298 mm (90.5 in)

Model	Cutting Width	Blades	Rotation Angle	Max Side Shift	Weight	Code
105	105 cm (41.3 in)	30 pcs	+90° / - 45°	174 cm (68.5 in)	277 kg (610 lbs)	C890596
125	125 cm (49.2 in)	36 pcs	+90° / - 45°	174 cm (68.5 in)	300 kg (662 lbs)	C890597

Compatibility	1.1 M14	2.3 MK-MZ	S520 4.2	S525 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
105														
125														


Very compatible

Compatible

Not compatible

FLAIL MOWER

<http://tiny.cc/flailmower1>



FEATURES & BENEFITS

- Great cutting power
- Reliable and efficient
- Works safely and efficiently
- Multiflot® floating system

A versatile and compact machine designed to efficiently cut long grass and small scrub plants.

A wide choice of cutting tools makes this unit suitable for fine grass cutting, as well as more heavy duty applications. This mower capitalizes on MultiOne's best in class hydraulic power to deliver top performance.



Model	Width	Cutting Height	Blades	Weight	Code
105	105 cm (41.3 in)	2-10 cm (0.8-4 in)	30 pcs	122 kg (269 lbs)	C890590
125	125 cm (49.2 in)	2-10 cm (0.8-4 in)	36 pcs	145 kg (320 lbs)	C890591
150	150 cm (59 in)	2-10 cm (0.8-4 in)	42 pcs	162 kg (357 lbs)	C890592

Compatibility	1.1 M14	2.3 MK-MZ	3.5 S520 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT800	9.6 GT800	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
105														
125														
150														

Very compatible


Compatible

Not compatible



SIDE BOOM WITH FLAIL MOWER DZ1


http://tiny.cc/sideflailmower_dz1



FEATURES & BENEFITS

- Excellent visibility of to the whole working area
- Compact with long reach capabilities

The side flail mower, combined with the power and stability of the MultiOne, makes it possible to reach places it is not safe to drive. This makes mowing side slopes, ditches, waterfronts, and other hard to reach areas safe and easy. Mowing road sides with the combination of a MultiOne and this mower is easier and more efficient than with larger machines.

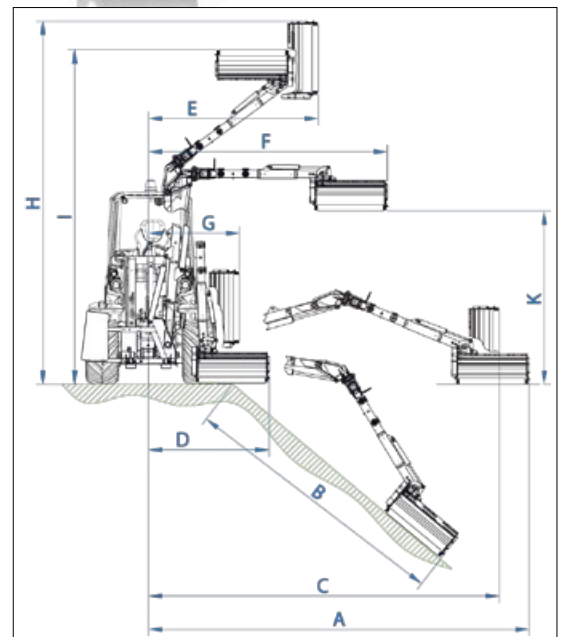

Model	A	B	C	D	E	F	G	H	I	K
Flail mower 60	280 cm (110 in)	170 cm (67 in)	260 cm (102 in)	145 cm (57 in)	130 cm (51 in)	175 cm (69 in)	180 cm (71 in)	300 cm (118 in)	280 cm (110 in)	155 cm (61 in)
Flail mower 80	300 cm (118 in)	190 cm (75 in)	260 cm (102 in)	165 cm (65 in)	130 cm (51 in)	195 cm (77 in)	180 cm (71 in)	320 cm (126 in)	280 cm (110 in)	155 cm (61 in)

Boom Mower	Max. Extension	Width	Weight	Code
Boom mower DZ1 (*)	3 m (9.8 ft)		292 kg (644 lbs)	C890607
Flail mower 60 for boom		60 cm (23.6 in)	80 kg (176 lbs)	C890606
Flail mower 80 for boom		80 cm (31.5 in)	105 kg (232 lbs)	C890601

(*) C890601 or C890606 required

Compatibility	1.1 M14	2.3 MK-MZ	3.5 S520 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT880	9.6 GT880	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
Boom + 60 Flail mower														
Boom + 80 Flail mower														


Very compatible

Compatible

Not compatible

SIDE BOOM WITH FLAIL MOWER DZ2


<http://tiny.cc/sideflailmower>



FEATURES & BENEFITS

- Excellent visibility of to the whole working area
- Compact with long reach capabilities

MultiOne's side flail mower lets you reach the cutting head into waterfronts, ditches, steep slopes, and other hard to reach areas safely. This mower uses a two-piece attachment system, using a sideways boom that can carry one of two mowing attachments. This lets you choose between a flail mower for tough brush or a traditional lawn mower for a better finish on shorter grass.

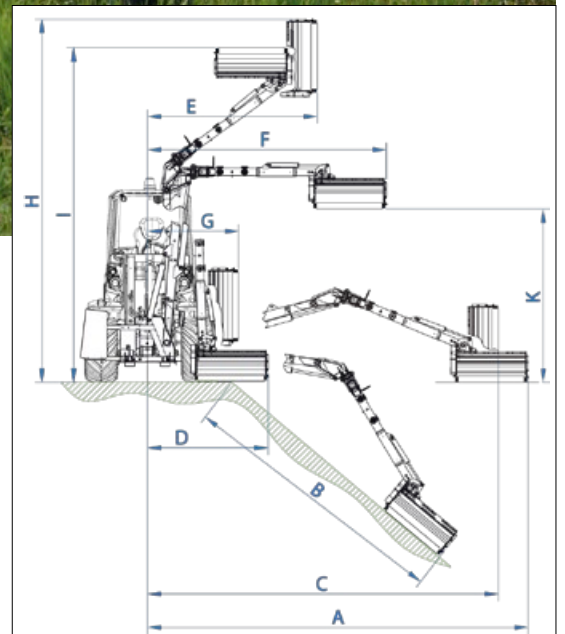

Model	A	B	C	D	E	F	G	H	I	K
Flail mower 80	315 cm (124 in)	190 cm (74.8 in)	265 cm (104.3 in)	185 cm (72.8 in)	155 cm (61 in)	215 cm (84.6 in)	135 cm (53.1 in)	375 cm (147.6 in)	325 cm (128 in)	135 cm (53.1 in)
Flail mower 100	335 cm (132 in)	210 cm (82.7 in)	265 cm (104.3 in)	205 cm (80.7 in)	155 cm (61 in)	235 cm (92.5 in)	135 cm (53.1 in)	395 cm (155.5 in)	325 cm (128 in)	135 cm (53.1 in)

Boom Mower	Max. Extension	Width	Weight	Code
Boom mower DZ2(*)	3,5 m (11.5 ft)		486 kg (1072 lbs)	C890600
Flail mower 80 for boom		80 cm (31.5 in)	105 kg (232 lbs)	C890601
Flail mower 100 for boom		100 cm (39.4 in)	155 kg (342 lbs)	C890602
Lawn mower 120 for boom		120 cm (47.2 in)	100 kg (221 lbs)	C890604

(*) C890601, C890604 or C890602 required

Compatibility	1.1 M14	2.3 MK-MZ	3.520 3.525	4.2 5.2	5.3 1.2	6.3	1.3	8.4	9.5 G180	9.6 G180	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
Boom + 80 Flail mower														
Boom + 100 Flail mower														
Boom + 120 Lawn mower														

Very compatible

Compatible

Not compatible



SPIKE AERATOR


<http://tiny.cc/spikeaerator>

FEATURES & BENEFITS

- Quick and efficient operation
- Suitable for sandy or loamy soils

The spike aerator cuts and penetrates the ground surface using the wedge shaped spikes. The cut slots enable air, fertilizer, and water to effectively reach the lawn roots in sandy or loamy soils. The open slots quickly close after water causes the compacted soil to expand.

Spike penetration depth is easily controlled using the two guide rollers, providing consistent results.



Model					Working Width				Weight			Code		
Spike Aerator					130 cm (51.2 in)				300 kg (662 lbs)			C890446		
Compatibility	1.1	2.3	S520	4.2	5.3	6.3	7.3	8.4	9.5	9.6	10.8	6.3SD	7.3SD	9.5SD
	M14	MK-MZ	S525	5.2	7.2				G1980	G1980	10.9		8.4SD	

CORE AERATOR


<http://tiny.cc/coreaerator>

FEATURES & BENEFITS

- Holes stay open for a long time
- Suitable for heavy clay soils

The core aerator penetrates the ground pulling plugs of grass and soil from the ground, leaving the plugs behind. The holes created enable air, fertilizer, and water to effectively reach the lawn roots in heavy clay soils.

Core aerator penetration depth is easily controlled using the two guide rollers, providing consistent results.



Model				Working Width					Weight			Code		
Core Aerator				130 cm (51.2 in)					300 kg (662 lbs)			C890445		
Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
				Very compatible					Compatible			Not compatible		

Very compatible

Compatible

Not compatible

LAWN MOWER

<http://tiny.cc/lawnmower2>



FEATURES & BENEFITS

- Mulching kit available
- Equipped with safety stop valve

Ideal for fine cut applications, such as golf courses and large acreage mowing. The mower has been designed with three blades that cut with an overlap that prevents uncut strips. MultiOne's extensive design experience makes the mower very reliable and assures a high quality cut. The independent 4 wheel support of the mower frame allows the mower deck to follow ground contours.



Model	Width	Cutting Height	Weight	Code
Lawn mower 100 with mulching system	100 cm (39.4 in)	1-12 cm (0.4 – 5 in)	116 kg (256 lbs)	C895080
Lawn mower 130 with rear discharge	130 cm (51.2 in)	1-12 cm (0.4 – 5 in)	170 kg (375 lbs)	C890630
Lawn mower 150 with side discharge	150 cm (59 in)	1-12 cm (0.4 – 5 in)	207 kg (457 lbs)	C890632
Lawn mower 180 with side discharge	180 cm (70.8 in)	1-12 cm (0.4 – 5 in)	240 kg (529 lbs)	C890634
Options				
Mulching kit for lawn mower 130			20 kg (44 lbs)	C890631
Mulching kit for lawn mower 150			21 kg (47 lbs)	C890633
Mulching kit for lawn mower 180			25 kg (55 lbs)	C890635

Compatibility	1:1 M14	2:3 MK-MZ	3:5 S520 S525	4:2 5:2	5:3 7:2	6:3	7:3	8:4	9:5 GT80	9:6 GT80	10:8 10:9	6:3SD	7:3SD 8:4SD	9:5SD
Model														
100														
130														
150														
180														

Very compatible

Compatible

Not compatible



TORNADO LAWN MOWER

<http://tiny.cc/tornadolawnmower2>



FEATURES & BENEFITS

- Powerful lawn mower with internal clipping catcher
- Can also be used to collect tree leaves on lawns

Designed for professional level green space maintenance, the MultiOne Tornado mower with the internal clipping catcher effectively cuts dry and wet grass. Using the patented MultiOne Tornado, in a single pass you can cut, pick-up, and collect the clippings in the internal catcher with no noise or dust. The catcher can be easily unloaded directly into a trailer.



Model	Width	Volume	Cutting height	Blades	Weight	Code
Tornado 120 (for M28)	120 cm (47.2 in)	250 l (8.8 ft³)	1-12 cm (0.4 – 5 in)	3	210 kg (463 lbs)	C890642
Tornado 120	120 cm (47.2 in)	250 l (8.8 ft³)	1-12 cm (0.4 – 5 in)	3	210 kg (463 lbs)	C890640
Tornado 150	150 cm (59 in)	250 l (8.8 ft³)	1-12 cm (0.4 – 5 in)	3	253 kg (558 lbs)	C890641

Compatibility	1.1 M14	2.3 MK-MZ	3.5 S520 S525	4.2 S12	5.3 T12	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
120 (for M28)														
120														
150														

Very compatible

Compatible

Not compatible

SICKLE BAR MOWER

<http://tiny.cc/sicklebarmower1>



FEATURES & BENEFITS

- Compact dimensions
- Cost effective
- Fast

The MultiOne hydraulically powered sickle bar mower has been designed to quickly and effectively cut long grasses and hay on fields, meadows, and road banks. The sickle bar mower is ideal for cutting these grasses which can be harvested in a secondary process.



Model	Width	Code
145	145 cm (57 in)	C890653
165	165 cm (65 in)	C890654

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
145														
165														

Very compatible


Compatible

Not compatible



HEDGE CUTTER

<http://tiny.cc/hedgecutter>




FEATURES & BENEFITS

- Cut angle electrically adjustable
- Time saving attachment
- Very high cutting quality
- Cutting bar is suitable for cutting fine leaves, as well as heavy growth

The hedge cutter is the perfect attachment for hedge cutting, and more. The combination of the cutters arm angle adjustment and the MultiOne's boom reach provides excellent reach.

Through using the speed and flexibility of the MultiOne, cutting straight hedge profiles is quick and easy.

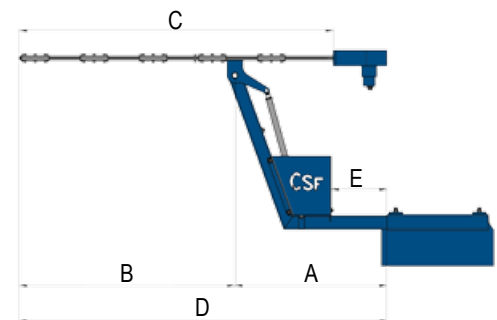

Dimensions	
A	773 / 490 mm (30.4 / 19.3 in)
B	1095 mm (43.1 in)
C	1595 mm (62.8 in)
D	1868 / 1585 mm (73.5 / 62.4 in)
E	283 mm (11.1 in)

Model	Max. cutting diameter	Slewing angle	Weight	Code
10	1 cm (0.4 in)	120°	108 kg (238 lbs)	C890663
30	3 cm (1.2 in)	120°	160 kg (353 lbs)	C890664

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
10														
30														

Very compatible

Compatible

Not compatible


LANDSCAPE POT CLAMP

<http://tiny.cc/vaseclamp>

FEATURES & BENEFITS

- The easiest way to lift and transport potted or balled plants, trees, barrels, and more without causing damage.
- Excellent tool for nurseries and landscapers

The MultiOne pot clamp is designed to lift and transport round objects, such as potted or balled plants and trees, barrels, and more without causing damage.



Model	Max load	Min Opening	Max Opening	Weight	Code
Landscape pot clamp	650 kg (1433 lbs)	25 cm (9.8 in)	120 cm (47.2 in)	80 kg (176 lbs)	C890721

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

SPRAYER

<http://tiny.cc/sprayer>



FEATURES & BENEFITS

- Fast application for large areas
- Flow and pressure adjustable

The hydraulically powered MultiOne sprayer is the proper attachment for the fast and efficient application of landscaping chemicals.

NOTE: MultiOne recommends that the operator wear the appropriate personal protection equipment when handling and applying landscaping chemicals. The 4.5 m (14.75 ft) wide spray bar, combined with the 120 l (31.7 gal) tank allow for fast coverage of large areas, and can be mounted either on the front or rear of the MultiOne. Spray nozzles are adjustable to assure the proper material application, making this system ideal for landscape and grass area maintenance.

This unit comes standard with a 50 m (165 ft) hose reel with an application wand and nozzle. System pressure and flow are adjustable to meet application requirements.

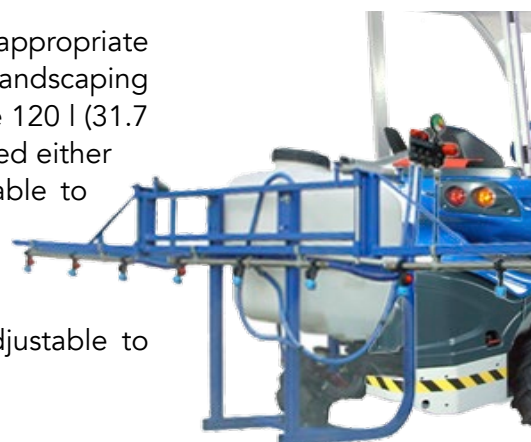

Model	Capacity	Spraying bar Width	Hose reel	Weight	Code
Sprayer	120 l (31.7 gal)	450 cm (177.2 in)	50 m (164 ft)	65 kg (144 lbs)	C890740

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible




DUAL BLADE HEDGE TRIMMER

<http://tiny.cc/Vineyardtrimmer>


FEATURES & BENEFITS

- Dual cutting action saves time
- Completely adjustable
- Easy to control

The hydraulically powered dual blade hedge trimmer allows the top and sides of large plants to be cut simultaneously. Each frame and cutter assembly is independently adjustable, and the MultiOne's boom provides additional flexibility and control.

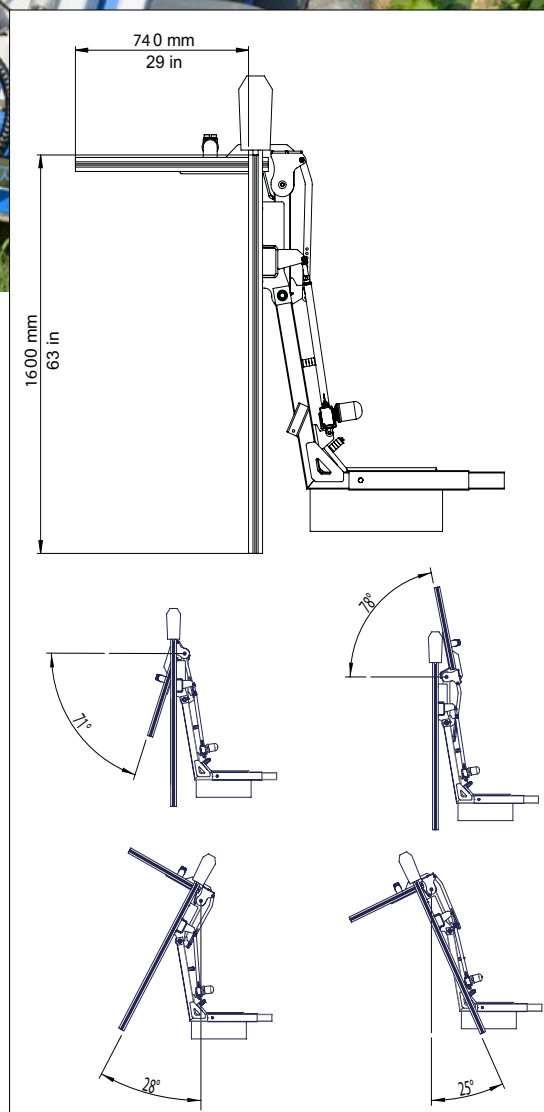

Model	Vertical Bar Length	Horizontal Bar Length	Weight	Code
Double Blade Hedge Trimmer	160 cm (63 in)	74 cm (29,1 in)	160 kg (353 lbs)	C890441

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible


INTER-ROW MOWER

<http://tiny.cc/interrow>


FEATURES & BENEFITS

- Abrasion resistant guard
- Floating system
- Automatic extension and return system

The inter-row mower is designed to cut grass and shrubs around trees, guard rails, traffic signs, and other obstacles. The floating mower system allows the mower disk to automatically follow ground contours. This system provides excellent productivity and an even cut. The inter-row mower disk can be offset to the right to allow for variable working conditions.

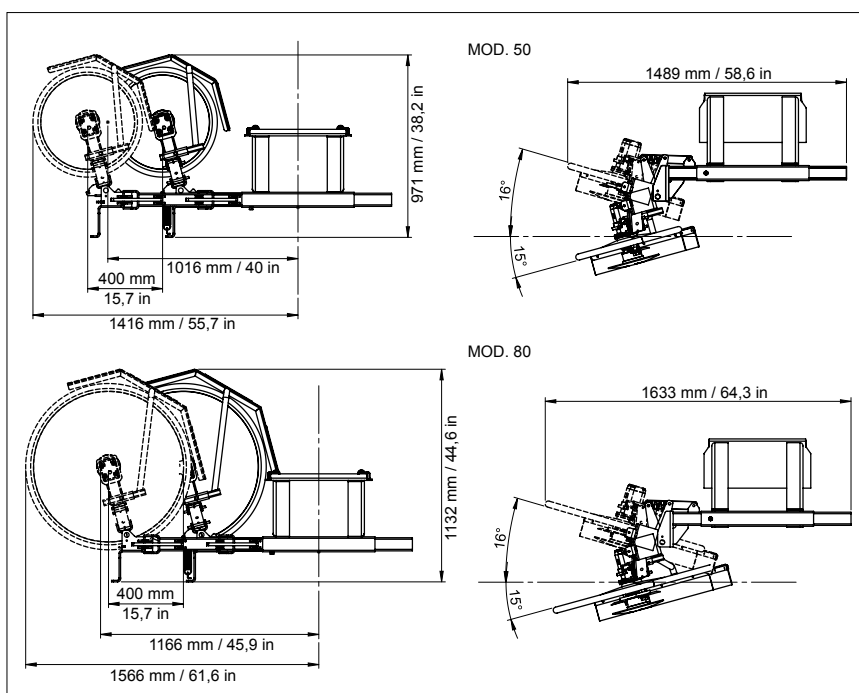


Model	Mowing disk diameter	Weight	Code
50	50 cm (19.7 in)	108 kg (238 lbs)	C890705
80	80 cm (31.5 in)	115 kg (254 lbs)	C890706

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
50														
80														

Very compatible


Compatible

Not compatible

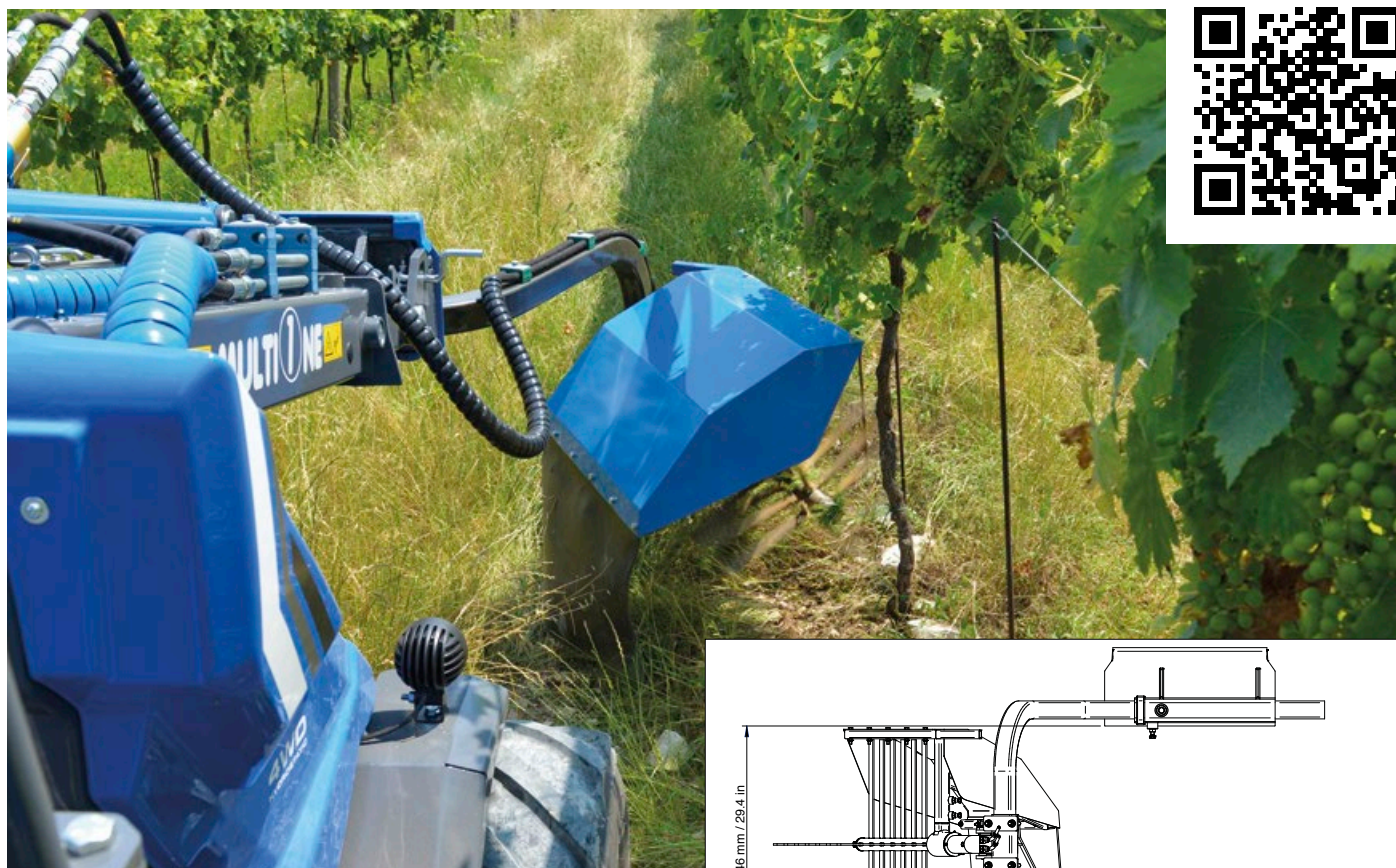


- Low wear cutter string
- Variable offset
- Efficient and reliable

The shoot remover frame can be offset to the right to allow for variable working conditions. Replacement of the long lasting rubber strings is quick and easy.

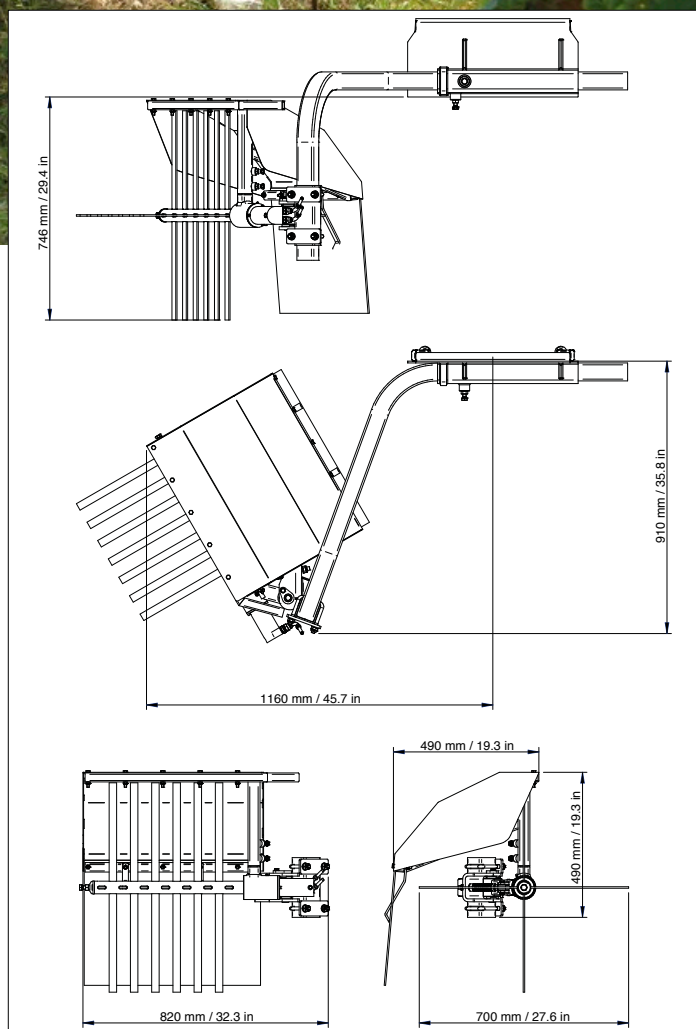

Model	Rotor Length				Offset max				Weight				Code	
Shoot Remover	82 cm (32.3 in)				25 cm (9.8 in)				50 kg (110 lbs)				C890436	
Compatibility	7.1 M14	2.3 MK-MZ	S&S20 S&S25	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
<div><div></div><div>Very compatible</div><div>Compatible</div><div>Not compatible</div></div>														



- Total control of vibration frequency (up to 40 Hz)
- Operates on trees with wide trunk
- Harvest collector, 6 m (19.5 ft)

The shaker vibrating head is powered by a compact hydraulic motor. The shaker's controls are located near the operator's seat, and controls all movements and vibration frequency.

Model	Trunk diameter	Capacity	Diameter	Weight	Code
Shaker vibrating head	0-35 cm (0-13.8 in)	/	/	330 kg (727 lbs)	C891000
Collector	/	300 kg (660 lbs)	6 m (19.7 ft)	180 kg (397 lbs)	C891001


Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1900	9.6 G1900	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD



Very compatible

Compatible

Not compatible



FEATURES & BENEFITS

- Multifunction tool
- 6 professional attachments for vineyards
- Suitable for rows from 200 cm (6.5 ft) wide

MultiOne's vineyard tool carrier is a multi-functional tool carrier for a wide range of vineyard attachments. This tool carrier for vineyard is equipped with an electro-hydraulic distributor with 4 functions (roll back / tilt head / side extension / height) operated through a joystick positioned in the operator's cab.



Tool carrier for vineyard		Diameter / Blade Length	Weight	Min. Row Width	Code
Vineyard tool carrier (base machine)		/	220 kg (485 lbs)	200 cm (78.74 in)	C890760
1	Blade Weeder (*)	50 cm (19.6 in)	/	/	C890763
2	Plough roots bare blade (*)	26 cm (10.2 in)	/	/	C890766
3	Power Harrow unit 3 blades (*)	40 cm (15.7 in)	/	/	C890761
4	Disk roots bare (*)	36 cm (14.2 in)	/	/	C890764
5	Disk roots prop (*)	46 cm (18.1 in)	/	/	C890765
6	Disk Mower, blades and wires (*)	40 cm (15.7 in)	/	/	C890762

(*) C890760 required

Compatibility	1:1 M14	2:3 MK-M2	S520 S525	4:2 5:2	5:3 7:2	6:3	7:3	8:4	9:5 GT960	9:6 GT960	10:8 10:9	6:3SD	7:3SD 8:4SD	9:5SD

Very compatible

Compatible

Not compatible

VINEYARD SPRAYER

<http://tiny.cc/vineyardsprayer>

FEATURES & BENEFITS

- High pressure, hydraulically powered pump
- Polyethylene tank
- Clean water tank for hand washing

The Vineyard Sprayer is a versatile sprayer suitable for vineyard spraying, weed-killing in open-field growing, inter-row weed-killing.

NOTE: MultiOne recommends that the operator wear the appropriate personal protection equipment when handling and applying landscaping chemicals.



Model	Tank Capacity	Flow output	Max Pressure	Code
Vineyard Sprayer	200 l (52.8 gal)	40 l/min (10.6 GPM)	60 bar (870 psi)	C890741

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD


STAINLESS STEEL TIPPING DUMPER

<http://tiny.cc/tippingdumper>

FEATURES & BENEFITS

- High capacity
- For fruit and vegetables
- Hydraulic dumping

The MultiOne stainless steel tipping dumper is designed for grape, fruit, and vegetable transportation. Two hydraulic cylinders tip the container for unloading into trucks or boxes. Using the MultiOne's boom, the tipping dumper can reach almost any dumping position.



Model	Max Load	Width	Weight	Code
Stainless steel Tipping Dumper	400 kg (882 lbs)	120 cm (47,3 in)	180 kg (397 lbs)	C890430


Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

POWER HARROW

<http://tiny.cc/powerharrow>


FEATURES & BENEFITS

- Professional, efficient rotary harrow for topsoil levelling
- Top grade finish with just one pass
- Available with seeding unit

The MultiOne hydraulically powered power harrow is the ideal tool for preparing soil for seeding. In one pass the soil is broken up, weeds and scrub growth are uprooted, and the soil is leveled.

The power harrow can also be equipped with the optional seeding unit, combining soil preparation and seeding in one pass.



Model	Working Width	Working Depth	Weight	Code
110	110 cm (43.3 in)	0 - 15 cm (0 - 5.9 in)	215 kg (474 lbs)	C890498
130	130 cm (51.2 in)	0 - 15 cm (0 - 5.9 in)	242 kg (534 lbs)	C890500
150	150 cm (59 in)	0 - 15 cm (0 - 5.9 in)	269 kg (593 lbs)	C890502
Options				
Seeding unit for power harrow 110				C890499
Seeding unit for power harrow 130				C890501
Seeding unit for power harrow 150				C890503


Compatibility	1.1 M14	2.3 MK-MZ	3.5 S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
110														
130														
150														

Very compatible

Compatible

Not compatible

ROTARY TILLER

<http://tiny.cc/rotarytiller>


FEATURES & BENEFITS

- Reliable, heavy duty
- Hydraulic transmission

The heavy duty MultiOne rotary tiller is the ideal tool for preparing the soil for seeding or planting, even in tough conditions and hard soils. In one pass, the hydraulically powered tiller breaks up the soil, weeds and scrub growth are uprooted, and the soil is leveled.



Model	Width	Working depth	Weight	Code
100	100 cm (39.4 in)	14 cm (5.5 in)	95 kg (210 lbs)	C890495
135	135 cm (53.1 in)	14 cm (5.5 in)	130 kg (287 lbs)	C890496
150	150 cm (59 in)	14 cm (5.5 in)	160 kg (353 lbs)	C890497

Compatibility	1.1 M14	2.3 MK-MZ	3.520 3.525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT80	9.6 GT80	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
100														
135														
150														

Very compatible

Compatible

Not compatible


STONE BURIER

<http://tiny.cc/stoneburrier>


FEATURES & BENEFITS

- Top grade finish in just one pass
- Optional seeding unit

The hydraulically powered MultiOne stone burier is the ideal machine to prepare a smooth seed bed in any type of soil even if there are no stones present. In one pass, the stone burier tills the soil, buries stones and other solid items, and tamps the soil. Equip the stone burier with the optional seeding unit combines soil preparation and seeding in one pass.

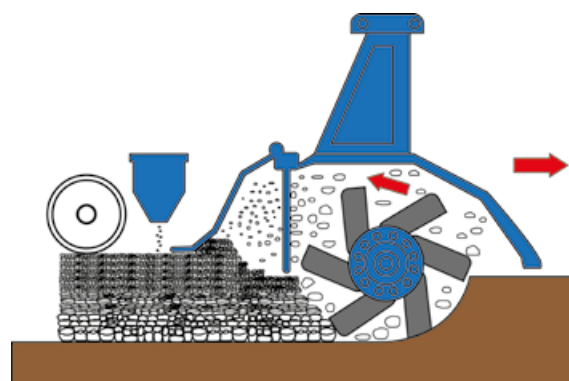

Model	Width	Roller width	Working depth	Max rock diameter	Weight	Code
100 w/roller	100 cm (39.4 in)	120 cm (47.2 in)	15 cm (0-6 in)	4 cm (1.6 in)	160 kg (353lbs)	C890504
120 w/roller	117 cm (49.2 in)	140 cm (55.1 in)	15 cm (0-6 in)	4 cm (1.6 in)	270 kg (595 lbs)	C890506
135 w/roller	133 cm (52.4 in)	145 cm (57 in)	15 cm (0-6 in)	4 cm (1.6 in)	447 kg (986 lbs)	C890508
Options						
Seeding unit for stoneburier 100						C890505
Seeding unit for stoneburier 120						C890507
Seeding unit for stoneburier 135						C890509

Compatibility	1.1 M14	2.3 MK-MZ	3.520 S525	4.2 S2	5.3 L2	6.3	7.3	8.4	9.5 GT80	9.6 GT80	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
100 w/roller														
120 w/roller														
135 w/roller														

Very compatible

Compatible

Not compatible

POWER RAKE

<http://tiny.cc/powerrake>

FEATURES & BENEFITS

- Powerful and fast
- Effective

The MultiOne power rake is the ideal tool for preparing the soil for planting.

Operating the power rake with the gauge wheels down puts the machine in the landscaping mode, conditioning and preparing the soil, creating an ideal bed for seeding. Operating the power rake with the gauge wheels up puts the machine in the tilling mode for more aggressive soil preparation.

Since the power rake does not require a lot of power, even the smaller machines work well with this unit.



Model	Width	Weight	Code
135	135 cm (53.1 in)	250 kg (551 lbs)	C890685
155	155 cm (61 in)	290 kg (640 lbs)	C890686

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
135														
155														

RIPPER

<http://tiny.cc/ripper>

FEATURES & BENEFITS

- Simple and efficient
- Rugged construction

The ripper is the perfect tool to break-up hard packed ground, removing roots and buried stones. The ripper tines are 30 cm (12 in) long for deep surface penetration.



Model	Working depth	Width	Weight	Code
Ripper	30 cm (11.8 in)	50 cm (19.7 in)	23 kg (50.7 lbs)	C891220

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

POWER PLOW

FEATURES & BENEFITS


- The corkscrew action of the blades pulls the plough through the ground
- The soil is discharged on the right hand side
- The horizontal digging action causes little or no hardpan

The MultiOne power plow can effortlessly dig into all types of soil, even hardened, rock-filled dirt that has never been broken. The rotary plow works well in areas with existing sod. It chops and buries the grass and roots and does not tangle easily.

This rotary plow is a powerful and effective method of preparing your soil for planting, and can work effectively in tight working areas, such as next to sidewalks, curbs, and other buildings.



<http://tiny.cc/powerplow>



Model	Weight	Code
Power Plow	93 kg (205 lbs)	C891240

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

LEVELER


FEATURES & BENEFITS

- Economical attachment to level gravel and other soils
- Eliminates almost all manual shoveling and grading at job sites

The MultiOne leveler is a simple, but extremely useful tool for leveling large areas. Use this tool to level sand, mulch, and rough tilled soil easily and quickly.



<http://tiny.cc/leveller>



Model	Width	Weight	Code
Leveler	150 cm (59 in)	130 kg (287 lbs)	C890100

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

STUMP GRINDER


<http://tiny.cc/stumpgrinder>

FEATURES & BENEFITS

- Excellent visibility of the cutting area
- Cuts large stumps without repositioning

The hydraulically powered stump grinder is a necessary tool for landscaping and forestry work. This unit hydraulically sweeps side to side effectively grinding the stump as deeply under ground as needed.

The stump grinder is safely controlled from the MultiOne's operator's seat. The solid steel cutter wheel and heavy duty teeth assure long lasting cutting performance.



Model	Slewing angle	Weight	Code
Stump Grinder	±40°	107 kg (236 lbs)	C890513

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

POWER AUGER FOR TREE PLANTING


<http://tiny.cc/augertree>

FEATURES & BENEFITS

- Specifically designed to transplant trees

The powerful hydraulic auger is available with two auger bit diameters, specifically designed for tree planting.

The special auger bit creates the hole without compacting the internal hole surface, allowing the tree to easily take root.



Model	Diameter	Weight	Code
Power auger for tree plating, drive unit (C890811 or C890812 required)	/	85 kg (188 lbs)	C890810
Cutting head 80	80 cm (31.5 in)	/	C890811
Cutting head 100	100 cm (39.4 in)	/	C890812

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible




- **Cost effective**
- **Working range approx 15 m (50 ft)**
- **10 meter (33 ft) hose**

A photograph of a long, tapered copper probe with a brass fitting at one end, and three smaller brass components (a hexagonal nut, a hexagonal plug, and a small tube) below it.

The system includes a 10 m (33 ft) hose and a set of three nozzles.

Model	Range	Tank Capacity	Total dimensions			Weight	Code							
Hydroseeder	15 m approx (50 ft)	500 l (132 gal)	1600x1250x1200 mm (63x49x42.7 in)			230 kg (507 lbs)	C890560							
Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT900	9.6 GT900	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Very compatibleCompatibleNot compatible														

TREE SPADE


<http://tiny.cc/treetransplanter>


FEATURES & BENEFITS

- Overlapping blades for clean cut
- Swing-open gate design for easy tree access

Using the MultiOne tree spade, a tree can be dug out, transplanted, or balled for transport quickly and easily.

The overlapping spade blades ensure a clean root cutting, and support the root ball. The tree spade is available in two sizes for different tree diameters.

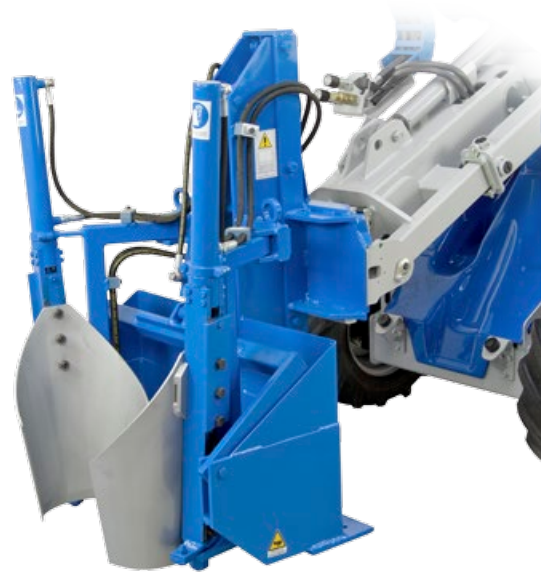

Model	Diameter	Weight	Code
27	27 cm (10.6 in)	300 kg (662 lbs)	C891100
40	40 cm (15.7 in)	550 kg (1212 lbs)	C891101

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 S2	5.3 1.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
27														
40														


Very compatible

Compatible

Not compatible



DUMPER

<http://tiny.cc/dumper2>


FEATURES & BENEFITS

- Cost effective
- High capacity

The MultiOne dumper is a very useful tool used to collect, transport, store, and empty waste. There are two sizes, a 200 l (7 cu ft) unit, and the larger 400 l (14 cu ft). Each of these units can stand on its own when detached from the MultiOne, and easily dumped by the machine when full.



Model	Capacity	Width	Weight	Code
200	200 l (7 ft³)	97,5 cm (38.4 in)	60 kg (132 lbs)	C890280
400	400 l (14 ft³)	97,5 cm (38.4 in)	97 kg (214 lbs)	C890285


Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 1.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
200														
400														

Very compatible

Compatible

Not compatible

TREE SHEAR

<http://tiny.cc/treeshear>


FEATURES & BENEFITS

- Powerful and safe tree shear
- Clean and precise cuts

The MultiOne tree shear is a combination of a grapple to grab and safely control a tree and a powerful cutting shear to harvest the tree. Through the reach of the MultiOne's boom, this unit can also be used to prune branches, and clear scrub growth in difficult to reach places.



Model	Ø Max limb	Max Opening	Weight	Code
Hydraulic Blade	15 cm (5.9 in)	50 cm (19.68 in)	250 kg (552 lbs)	C891071
Fixed Blade	10 cm (3.93 in)	60 cm (23.62 in)	150 kg (330 lbs)	C891070

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT980	9.6 GT980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD
Model														
Hydraulic Blade														
Fixed Blade														

Very compatible

Compatible

Not compatible

TIMBER GRAB




<http://tiny.cc/timbergrab>

FEATURES & BENEFITS

- Versatile attachment for transporting and loading of timber, branches, etc.
- Strong and durable design

The MultiOne timber grab is the ideal tool for the handling of timber, branches, wood waste, kerb stones etc. No matter if you clamp more logs or just a single one, thanks to the excellent closing characteristics, the load is held tight securely.

Strong and durable design guarantees long service life of the attachment.

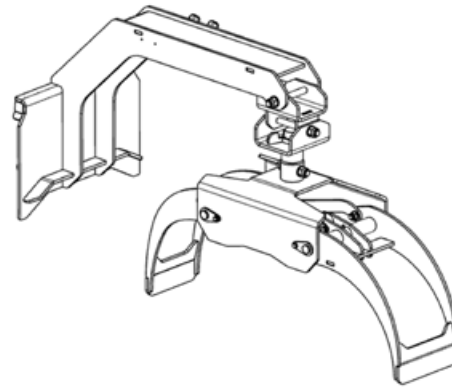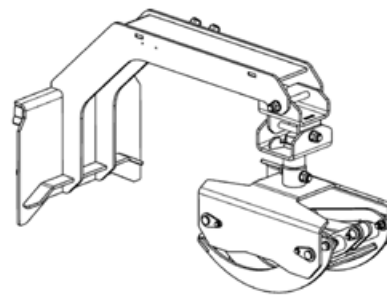

Model	Lifting Capacity	Max Opening Length	Min Opening Length	Weight	Code
Timber Grab	1000 kg (2204 lbs)	1050 mm (42 in)	60 mm (2.3 in)	145 kg (320 lbs)	C890581

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD


LOG GRAPPLE

<http://tiny.cc/loggrab>

FEATURES & BENEFITS

- Useful attachment for fencing and forest work
- Independent arms operated by two cylinders

The heavy duty MultiOne log grapple is a very powerful and flexible tool used to securely grab, lift, and transport harvested logs. The hydraulically powered grapple arms firmly grip the logs, securing them to the lower forks. The design of the grapple accommodates small logs to large tree trunks.




Model	Working width	Teeth length	Weight	Code
Log Grapple	100 cm (39.4 in)	101 cm (39.8 in)	120 kg (265 lbs)	C890580

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible




- **Powerful and safe log splitter**

The hydraulically powered MultiOne log splitter allows you to safely and quickly split cut logs into firewood. The large support table is great for handling large tree cut-offs, and the twin safety grip activation handles assure that the operator's hands are safely away from the splitting action.



Model						Power	Max log diameter			Weight			Code		
Log splitter						7 ton	40 cm (15.7 in)			110 kg (242 lbs)			C890570		

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1900	9.6 G1900	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD



Very compatible

Compatible

Not compatible

WINCH


<http://tiny.cc/m1winch>

FEATURES & BENEFITS

- Powerful and compact hydraulic winch
- The operator can safely and easily control it from the operator's seat

The hydraulically powered MultiOne winch is powerful enough to safely recover a stuck vehicle, haul logs, or even load a boat.

This tool is equipped with a safety net and 25 m (82 ft) steel cable.



Model	Cable Length	Pulling Force	Max reeling speed	Weight	Code
Winch	25 m (82 ft)	1000 kg (2204 lbs)	2,5 m/s (8.2 ft/s)	95 kg (210 lbs)	C891210

Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

HYDRAULIC BIO SHREDDER


<http://tiny.cc/bio-shredder>

FEATURES & BENEFITS

- Compact dimensions
- Cost effective

The hydraulically powered chipper/shredder is a powerful tool for quickly reducing a pile of brush, garden waste, and tree limbs to reusable shredded mulch. Combined with the MultiOne, this chipper/shredder can work in areas not reachable with a traditional towed chipper.

The machine's design incorporates a feed roller that pulls the branches up to 90 mm (3.5 in) diameter into the chipper section in a controlled, safe speed. The chips are then processed by the shredder section, reducing the wood chips to mulch. The operator remains safely out of the way during the chipping/shredding process.



Model	Max timber diameter	Weight	Code
Hydraulic bio shredder	9 cm (3.5 in)	210 kg (463 lbs)	C890730

Compatibility	1.1 M14	2.3 MK-MZ	S520 4.2	S525 5.2	5.3 7.2	6.3	7.3	8.4	9.5 G1980	9.6 G1980	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD

Very compatible

Compatible

Not compatible

ALUMINIUM RAMPS



FEATURES & BENEFITS

- **Light and Durable**

The sturdy aluminum ramps are durable and lightweight for easy handling. These ramps are designed with deep ridge treads for better traction that enables safe and efficient loading and unloading of the MultiOne from trucks and trailers.

NOTE: When ordering, please specify the machine model, weight, and wheelbase.



Model	Length	Max load	Width	Weight	Code
250	250 cm (98.4 in)	2480 kg (5467 lbs)	40 cm (15.7 in)	39 kg (86 lbs)	C890790
300	300 cm (118 in)	2050 kg (4520 lbs)	40 cm (15.7 in)	50 kg (110 lbs)	C890791
350	350 cm (138 in)	1575 kg (3472 lbs)	40 cm (15.7 in)	56 kg (124 lbs)	C890792
400	400 cm (157.5 in)	1300 kg (2866 lbs)	40 cm (15.7 in)	79 kg (174 lbs)	C890793
450	450 cm (177.2 in)	1090 kg (2403 lbs)	40 cm (15.7 in)	71 kg (157 lbs)	C890794
500	500 cm (197 in)	945 kg (2084 lbs)	40 cm (15.7 in)	78 kg (172 lbs)	C890795


MULTI CONNECTOR ADAPTORS



- 1-2. Adaptor to be put on the attachment, available with 2 or 3 hydraulic connections.
3. Adaptor to be put on the multiconnector, in order to connect standard flat face connections.

Model													Code
1	Multi connection upgrade kit 2 lines attachments												C880219
2	Multi connection upgrade kit 3 lines attachments												C880220
3	Multiconnector to quick coupling 3 lines adapter												C880221
Compatibility	1.1 Mi14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD 7.3SD 8.4SD	9.5SD
												Very compatible	
												Compatible	
												Not compatible	

ATTACHMENT COUPLING PLATE

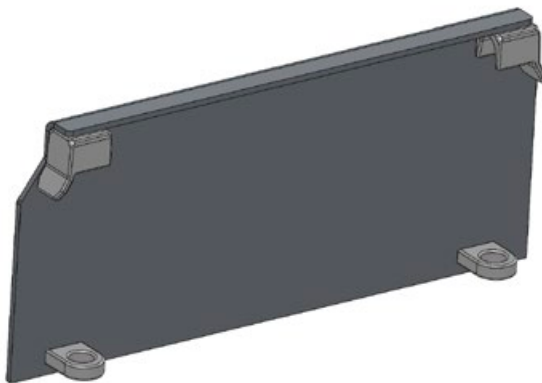

This plate can be welded to attachments that do not have the MultiOne style of mounting plate, making all attachments usable on the MultiOne.

NOTE: The following need to be checked before using this coupling plate (at customer charge):

- Applicable laws and safety requirements.
- Machine and hydraulic circuit interface.

Model												Code				
Attachment coupling plate (to be welded) for MultiOne - 5 mm thickness												C880233				
Attachment coupling plate (to be welded) for MultiOne - 12 mm thickness												C880236				
Compatibility	1:1 M14	2:3 MK-MZ	S520 S525	4:2 5:2	5:3 7:2	6:3	7:3	8:4	9:5 GT950	9:6 GT960	10	6:3SD	7:3SD 8:4SD	9:5SD		
												Very compatible		Compatible		Not compatible

MULTIONE/USA MINI LOADER COUPLING ADAPTER

This plate can be coupled to USA sized mini loader attachments that do not have the MultiOne style of mounting plate, making all attachments usable on the MultiOne.

Model												Code					
MultiOne/USA mini loader coupling adapter												C890020					
Compatibility	1.1 M14	2.3 MK-MZ	S520 S525	4.2 5.2	5.3 7.2	6.3	7.3	8.4	9.5 GT950	9.6 GT960	10.8 10.9	6.3SD	7.3SD 8.4SD	9.5SD			
												Very compatible		Compatible		Not compatible	



MULTI1ONE

WWW.MULTIONE.COM

MultiOne srl
via Palù, 6/8
36040 Grumolo delle Abbadesse
Vicenza - Italia
info@multione-csf.com

UniForce DISTRIBUTION

1-866-889-1272

info@uniforcedistribution.com

The information and images herein contained are provided for illustrative purposes only and are not binding on MultiOne, who reserves the right to change them at any time without notice.
©2017 MultiOne srl. All rights reserved.