



# METRO WIRE ROPE CORP.


553 Lehigh Avenue  
Union, New Jersey 07083

908-964-3690

FAX 908-964-8990 or 908-810-1904



## FOUR LEG BRIDLE SLINGS

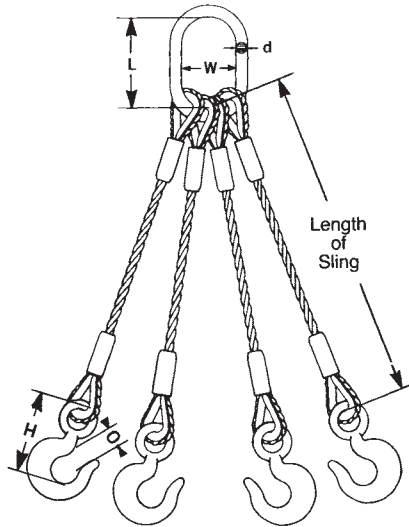

Rope Diam. Inches	Rated Capacities in Tons EIPS-IWRC*		
	60°	45°	30°
1/4	2.2	1.8	1.3
5/16	3.5	2.8	2.0
3/8	5.0	4.0	2.8
7/16	6.7	5.5	4.0
1/2	8.7	7.1	5.0
9/16	11.0	9.0	6.2
5/8	13.0	11.0	7.8
3/4	19.0	16.0	11.0
7/8	26.0	21.0	15.0
1	34.0	28.0	20.0
1 1/8	42.0	34.0	24.0
1 1/4	51.0	42.0	30.0
1 3/8	61.0	50.0	36.0
1 1/2	73.0	60.0	42.0
1 5/8	85.0	70.0	46.0
1 3/4	98.0	80.0	56.0
2	126.0	104.0	74.0
2 1/4	154.0	126.0	89.0
2 1/2	188.0	154.0	109.0

\* These Ratings refer to an evenly balanced load between the four legs.  
In most instances, the ratings for a 3-leg sling should be used to accommodate for an unevenly balanced load.  
For questions on Hook and Link dimensions, contact Metro Wire Rope Corp.



### **WARNING**

Inspect wire rope or sling and consult industry recommendations and OSHA standards before each use. This wire rope or sling may fail if it is damaged, abused, misused, overused or improperly maintained. Single leg slings should not be allowed to rotate. DEATH or INJURY can occur from improper use or maintenance.

Any Questions? Call METRO WIRE ROPE CORP.