





TU-481

- **Wide Range of Sizes Available:**
 - 30 and 60 Ton Capacity
 - 1" to 2-1/4" Wireline Size
 - 16" to 24" Sheave Diameter
 - Larger Capacity Blocks available.
- **Multiple Configurations Available:**
 - Swivel Hook
 - Swivel Shackle
 - Tailboard
 - Upset Shackle
 - Fixed Shackle
- **McKissick Roll-Forged Sheaves:**
 - Flame Hardened Grooves
 - 30 Ton furnished with Roller Bearings
 - 60 Ton furnished with Tapered Roller Bearings with seals
- All sizes are **RFID EQUIPPED**.

TU-480 SERIES BLOCKS

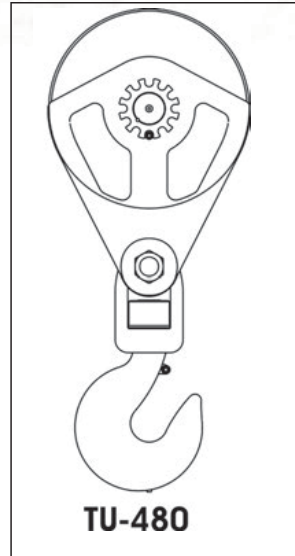

TU-480

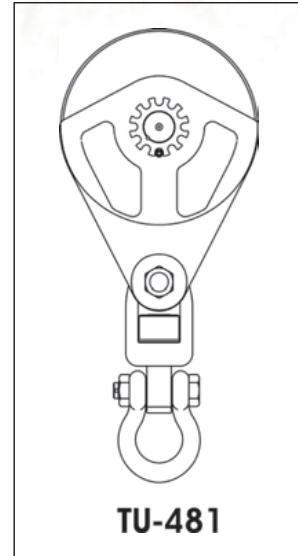

TU-481

- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.



TU-480 / TU-481 High Capacity Snatch Blocks for Tilt-Up Wall Construction

| Working Load Limit (Tons)* | Sheave Diameter (in.) | Wire Line Size (in.) | With Swivel Hook | | With Swivel Shackle | |
|----------------------------|-----------------------|----------------------|------------------|---------------------------|---------------------|---------------------------|
| | | | TU-480 Stock No. | TU-480 Weight Each (lbs.) | TU-481 Stock No. | TU-481 Weight Each (lbs.) |
| 30 | 16" | 1" | 2108300 | 225 | 2108303 | 235 |
| 30 | 16" | 1-1/8" | 2108312 | 225 | 2108315 | 235 |
| 30 | 16" | 1-1/4" | 2108324 | 225 | 2108327 | 235 |
| 30 | 16" | 1-3/8" | 2108336 | 225 | 2108339 | 235 |
| 30 | 16" | 1-1/2" | 2108348 | 225 | 2108351 | 235 |
| 30 | 20" | 1" | 2108360 | 240 | 2108363 | 250 |
| 30 | 20" | 1-1/8" | 2108372 | 240 | 2108375 | 250 |
| 30 | 20" | 1-1/4" | 2108384 | 240 | 2108387 | 250 |
| 30 | 20" | 1-3/8" | 2108396 | 240 | 2108399 | 250 |
| 30 | 20" | 1-1/2" | 2108408 | 240 | 2108411 | 250 |
| 60 | 18" | 1" | 2108420 | 390 | 2108423 | 390 |
| 60 | 18" | 1-1/8" | 2108435 | 390 | 2108438 | 390 |
| 60 | 18" | 1-1/4" | 2108450 | 390 | 2108453 | 390 |
| 60 | 18" | 1-3/8" | 2108465 | 390 | 2108468 | 390 |
| 60 | 18" | 1-1/2" | 2108480 | 390 | 2108483 | 390 |
| 60 | 24" | 1" | 2108495 | 450 | 2108498 | 450 |
| 60 | 24" | 1-1/8" | 2108510 | 450 | 2108513 | 450 |
| 60 | 24" | 1-1/4" | 2108525 | 450 | 2108528 | 450 |
| 60 | 24" | 1-3/8" | 2108540 | 450 | 2108543 | 450 |
| 60 | 24" | 1-1/2" | 2108555 | 450 | 2108558 | 450 |
| 60 | 24" | 1-5/8" | 2108570 | 450 | 2108573 | 450 |
| 60 | 24" | 1-3/4" | 2108585 | 450 | 2108588 | 450 |
| 60 | 24" | 1-7/8" | 2108600 | 450 | 2108603 | 450 |
| 60 | 24" | 2" | 2108615 | 450 | 2108618 | 450 |
| 60 | 24" | 2-1/4" | 2108630 | 450 | 2108633 | 450 |

* Ultimate Load is 4 times the Working Load Limit.




Contact our Block Hotline (800)772-1555 for larger capacity blocks up to 350 Tons or reference the special request form on page 461.

McKissick® Tilt-Up Wall Blocks



TU-480 SERIES BLOCKS

- **Wide Range of Sizes Available:**
 - 30 and 60 Ton Capacity
 - 1" to 2-1/4" Wireline Size
 - 16" to 24" Sheave Diameter
 - Larger Capacity Blocks available.
- **Multiple Configurations Available:**
 - Swivel Hook
 - Swivel Shackle
 - Tailboard
 - Upset Shackle
 - Fixed Shackle
- **McKissick Roll-Forged Sheaves:**
 - Flame Hardened Grooves
 - 30 Ton furnished with Roller Bearings
 - 60 Ton furnished with Tapered Roller Bearings with seals

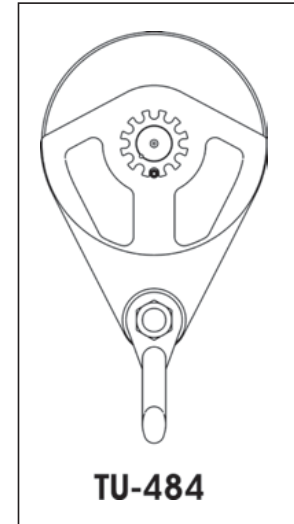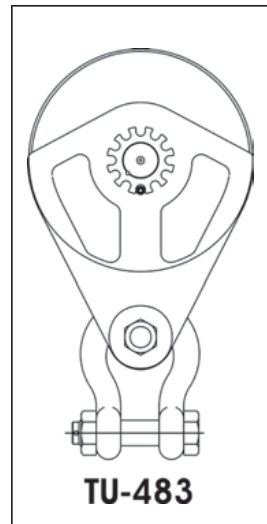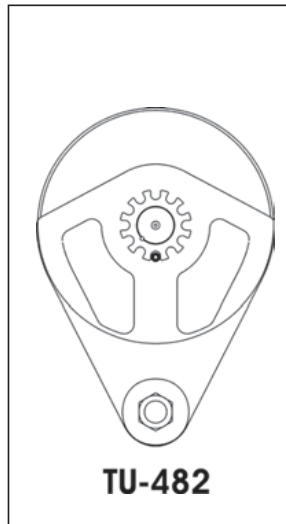

- All sizes are **RFID EQUIPPED**.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.



TU-482 / TU-483 / TU-484 High Capacity Snatch Blocks for Tilt-Up Wall Construction

| Working Load Limit (Tons)* | Sheave Diameter (in.) | Wireline Size (in.) | Tailboard Style | | With Upset Shackle | | With Fixed Shackle | |
|----------------------------|-----------------------|---------------------|------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|
| | | | TU-482 Stock No. | TU-482 Weight Each (lbs.) | TU-483 Stock No. | TU-483 Weight Each (lbs.) | TU-484 Stock No. | TU-484 Weight Each (lbs.) |
| 30 | 16" | 1" | 2108306 | 140 | 2108309 | 180 | 2108645 | 160 |
| 30 | 16" | 1-1/8" | 2108318 | 140 | 2108321 | 180 | 2108648 | 160 |
| 30 | 16" | 1-1/4" | 2108330 | 140 | 2108333 | 180 | 2108651 | 160 |
| 30 | 16" | 1-3/8" | 2108342 | 140 | 2108345 | 180 | 2108654 | 160 |
| 30 | 16" | 1-1/2" | 2108354 | 140 | 2108357 | 180 | 2108657 | 160 |
| 30 | 20" | 1" | 2108366 | 155 | 2108369 | 195 | 2108660 | 175 |
| 30 | 20" | 1-1/8" | 2108378 | 155 | 2108381 | 195 | 2108663 | 175 |
| 30 | 20" | 1-1/4" | 2108390 | 155 | 2108393 | 195 | 2108666 | 175 |
| 30 | 20" | 1-3/8" | 2108402 | 155 | 2108405 | 195 | 2108669 | 175 |
| 30 | 20" | 1-1/2" | 2108414 | 155 | 2108417 | 195 | 2108672 | 175 |
| 60 | 18" | 1" | 2108426 | 230 | 2108429 | 340 | 2108432 | 290 |
| 60 | 18" | 1-1/8" | 2108441 | 230 | 2108444 | 340 | 2108447 | 290 |
| 60 | 18" | 1-1/4" | 2108456 | 230 | 2108459 | 340 | 2108462 | 290 |
| 60 | 18" | 1-3/8" | 2108471 | 230 | 2108474 | 340 | 2108477 | 290 |
| 60 | 18" | 1-1/2" | 2108486 | 230 | 2108489 | 340 | 2108492 | 290 |
| 60 | 24" | 1" | 2108501 | 290 | 2108504 | 400 | 2108507 | 350 |
| 60 | 24" | 1-1/8" | 2108516 | 290 | 2108519 | 400 | 2108522 | 350 |
| 60 | 24" | 1-1/4" | 2108531 | 290 | 2108534 | 400 | 2108537 | 350 |
| 60 | 24" | 1-3/8" | 2108546 | 290 | 2108549 | 400 | 2108552 | 350 |
| 60 | 24" | 1-1/2" | 2108561 | 290 | 2108564 | 400 | 2108567 | 350 |
| 60 | 24" | 1-5/8" | 2108576 | 290 | 2108579 | 400 | 2108582 | 350 |
| 60 | 24" | 1-3/4" | 2108591 | 290 | 2108594 | 400 | 2108597 | 350 |
| 60 | 24" | 1-7/8" | 2108606 | 290 | 2108609 | 400 | 2108612 | 350 |
| 60 | 24" | 2" | 2108621 | 290 | 2108624 | 400 | 2108627 | 350 |
| 60 | 24" | 2-1/4" | 2108636 | 290 | 2108639 | 400 | 2108642 | 350 |

* Ultimate Load is 4 times the Working Load Limit.

Contact our Specials Sales Department for blocks up to 350 Tons or reference the special request form on page 461.