



## NEW STYPE OVAL PATTERN CONSTRUCTION BLOCKS



**Q-681-Z**



**Q-682-Z**



**Q-683-Z**

- All blocks are galvanized.
- Sheave lubricated through pressure lube fitting in center pin.
- Assembled with self lubricated bronze bushing.
- Combines weight of regular oval blocks with strength of extra heavy oval blocks.
- Assembled with bolt type anchor shackle.
- Side plates are rounded to provide additional stiffness and reduce wear and chaffing of the rope.

### Q-681-Z / Q-682-Z / Q-683-Z


Block Size (in.)	Fitting	Stock No. Bronze Bushed Steel Sheaves		
		Q-681-Z	Q-682-Z	Q-683-Z
6	Q	760441	760665	-
6	Q	760452	760676	760812
8	Q	760463	760687	760823
10	Q	760474	760698	760834

Fitting Type : Q - Bolt Type Anchor Shackle


### Q-681-Z / Q-682-Z / Q-683-Z

Block Size (in.)	Sheave Dimensions (in.)			Wire Rope Size (in.)	Working Load Limit (Tons)*			Weight Each (lbs.)		
	Outside Diam.	Rim Thickness	Center Pin Dia.		Single	Double	Triple	Single	Double	Triple
6	6	1.00	.75	3/8	3	4	-	15	28	-
6	6	1.00	.75	1/2	3	4	5	16	28	32
8	8	1.25	1.00	5/8	4	6	7	29	43	62
10	10	1.25	1.00	5/8	4	7	8	38	61	80

\*Ultimate Load is 4 times the Working Load Limit. Bearing Code: Z - Self Lubricating Bronze Bushed with pressure lube fitting.



**S-2131**  
Trawling Shackles

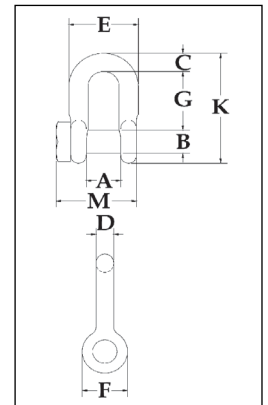

### S-2131 Trawling Shackles

Nominal Shackle Size D (in.)	Working Load Limit (t)*	S-2131 Stock No.	Weight Each (lbs.)	Dimensions (in.)										Tolerance +/-	
				A	B	C	D	E	F	G	K	M	G	A	
1/2	2	1018703	.75	.81	.63	.50	.50	1.81	1.19	1.63	3.09	2.22	.13	.06	
5/8	3-1/4	1018721	1.24	1.06	.75	.63	.63	2.31	1.56	2.00	3.78	2.75	.13	.06	
3/4	4-3/4	1018749	2.18	1.25	.88	.81	.75	2.75	1.88	2.38	4.50	3.25	.25	.06	
7/8	6-1/2	1018767	3.28	1.44	1.00	.97	.88	3.19	2.13	2.81	5.25	3.69	.25	.06	

\*Ultimate Load is 4 times the Working Load Limit.