

McKissick® Trawl & Try Net Blocks



J-452
Oblong Swivel
Eye

Double Rig Trawl Blocks

- Steel sheave with flame hardened groove, for maximum wear under abrasive conditions.
- Double row, permanently sealed tapered roller bearings.
- Pressure lubrication throughout.
- All steel construction.
- Hot Dip galvanized.




J452 Blocks

Sheave Dia. and Block No.	452 Stock No.	Working Load Limit (Tons)*	Weight Each (lbs.)	Sheave Dimensions (in.)	
				Outside Diam.	Rim Thickness
8" J-452	130655	10	48	8	3.75
12" J-452	130673	10	85	12	3.75
16" F-452	130682	20	116	16	3.75
18" J-452	2015467	25	300	18	5.44
22" F-452	130708	30	240	22	3.75

*Ultimate Load is 4 times the Working Load Limit. NOTE: 18" J-452 utilizes a Manganese Steel Sheave that is not flame hardened.


TRY NET BLOCKS

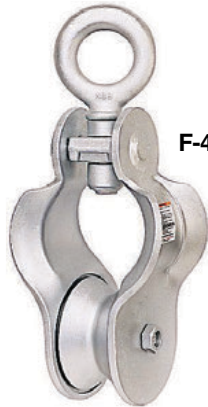

F-453 6"



F-454 6"

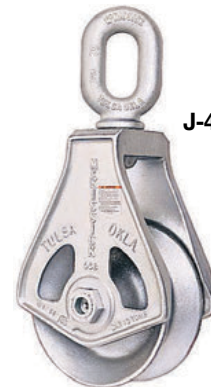

J-454 8"

- Forged steel swivel eyes.
- Hot Dip galvanized.
- 6" 453 - Pressed steel side plates with flared edges. Figure 8 grooved, self-lubricating bronze bushed sheaves, with pressure lube fittings. 453 has an extra wide throat opening to allow fittings to pass through.
- 6" 454 - Forged side plates designed to eliminate rope jamming. Wide throat opening and pressure lube fitting on sheave and eye fitting.
- 8" 454 - Forged steel side plates designed to eliminate possibility of rope jamming. Furnished with sealed tapered bearings. Flame hardened forged steel sheaves for wear resistance.

453, 454, Blocks

Sheave Dia. and Block No.	Bearing Type	Try Net Block Stock No.	Working Load Limit (Tons)*	Weight Each (lbs.)	Sheave Dimensions (in.)	
					Outside Diameter	Rim Thickness
6" F-453	Bronze Bushed	769886	5	35	6	2-3/4
6" F-454	Needle Bearing	2001763	5	23	6	2-3/4
8" J-454	Tapered Bearing	130726	10	36	8	2-7/8

*Ultimate Load is 4 times the Working Load Limit.