

# Beam Clamps



**IPTK**  
This IPTK series beam clamp is suitable for use as a temporary tackle eye for a beam.

## For Transferring Steel Beams and Attaching Tackle Eye

- Available in capacities of 2 thru 25 metric tons.
- Wide variety of jaw openings available: 3" to 40".
- Welded alloy steel body for strength and smaller size. Forged alloy, components where required.
- Equipped with handle for easy placement.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (CrosbyIP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance replacement parts are available.
- Manufactured by an ISO 9001 facility.
- All sizes are **RFID EQUIPPED**.



**IPTKU**  
This IPTKU series beam clamp has an improved hinged hoisting eye that increases the loading angles and an optional new "Double Locking Device".




**IPTKW**  
This IPTKW series beam clamp is suitable for use as a temporary tackle eye for a beam.

- Model IPTK: With Hoisting Eye
- Model IPTKW: Without Hoisting Eye
- Model IPTKU: With Hinged Hoisting Eye
- Model IPTKUD: With Double Locking Device




| Model                                      | Working Load Limit (t)* | Stock No. | Weight Each (lbs.) | Dimensions (in.) |           |       |      |      |      |      |      |
|--------------------------------------------|-------------------------|-----------|--------------------|------------------|-----------|-------|------|------|------|------|------|
|                                            |                         |           |                    | Jaw A            | C         | D     | E    | F    | H    | J    | K    |
| IPTK                                       | 2                       | 2700996   | 13.2               | 3.00 - 7.50      | A + 3.13  | 4.92  | 2.95 | -    | .98  | -    | .79  |
| IPTK                                       | 3                       | 2700997   | 14.3               | 3.00 - 7.50      | A + 3.13  | 4.92  | 2.95 | -    | .98  | -    | .79  |
| IPTK                                       | 4                       | 2700998   | 18.7               | 5.88 - 11.25     | A + 4.00  | 4.92  | 2.95 | -    | 1.38 | -    | .79  |
| IPTK                                       | 5                       | 2700994   | 24.3               | 4.75 - 13.75     | A + 7.67  | 4.92  | 2.95 | -    | 1.57 | -    | .79  |
| IPTK                                       | 10                      | 2700970   | 68.3               | 11.75 - 19.70    | A + 11.75 | 6.98  | 2.91 | -    | 1.57 | -    | 1.18 |
| IPTK                                       | 25                      | 2702999   | 496                | 18.00 - 40.00    | A + 8.66  | 19.69 | 4.92 | -    | 2.99 | -    | 1.77 |
| <b>Without Hoisting Eye</b>                |                         |           |                    |                  |           |       |      |      |      |      |      |
| IPTKW                                      | 2                       | 2700966   | 8.82               | 3.00 - 7.50      | A + 3.13  | 4.92  | -    | 1.10 | .98  | -    | -    |
| IPTKW                                      | 3                       | 2700967   | 9.92               | 3.00 - 7.50      | A + 3.13  | 4.92  | -    | 1.10 | .98  | -    | -    |
| IPTKW                                      | 4                       | 2700968   | 13.9               | 5.88 - 11.25     | A + 4.00  | 4.92  | -    | 1.30 | 1.38 | -    | -    |
| IPTKW                                      | 5                       | 2700969   | 19.4               | 4.75 - 13.75     | A + 7.67  | 4.92  | -    | 1.30 | 1.57 | -    | -    |
| <b>With Improved Hinged Hoisting Eye</b>   |                         |           |                    |                  |           |       |      |      |      |      |      |
| IPTKU                                      | 2                       | 2707996   | 12.8               | 2.95 - 7.48      | A + 3.94  | 4.76  | 2.99 | -    | .87  | 3.90 | .75  |
| IPTKU                                      | 3                       | 2707997   | 14.3               | 2.95 - 7.48      | A + 3.94  | 4.76  | 3.50 | -    | .87  | 4.80 | .87  |
| IPTKU                                      | 4                       | 2707998   | 21.8               | 4.72 - 11.02     | A + 5.91  | 5.51  | 3.50 | -    | 1.57 | 4.80 | .87  |
| IPTKU                                      | 5                       | 2707994   | 26.4               | 4.72 - 13.78     | A + 6.89  | 5.51  | 3.50 | -    | 1.57 | 4.80 | .87  |
| IPTKU                                      | 10                      | 2707970   | 83.8               | 7.87 - 18.11     | A + 11.81 | 7.87  | 4.13 | -    | 2.36 | 5.98 | 1.02 |
| <b>With Optional Double Locking Device</b> |                         |           |                    |                  |           |       |      |      |      |      |      |
| IPTKU/D                                    | 2                       | 2709996   | 12.8               | 2.95 - 7.48      | A + 3.94  | 6.50  | 3.50 | -    | .87  | 3.90 | .75  |
| IPTKU/D                                    | 3                       | 2709993   | 14.3               | 2.95 - 7.48      | A + 3.94  | 6.50  | 3.50 | -    | .87  | 4.80 | .87  |
| IPTKU/D                                    | 4                       | 2709995   | 21.8               | 4.72 - 11.02     | A + 5.91  | 7.28  | 3.50 | -    | 1.57 | 4.80 | .87  |
| IPTKU/D                                    | 5                       | 2709994   | 26.4               | 4.72 - 13.78     | A + 6.89  | 7.28  | 3.50 | -    | 1.57 | 4.80 | .87  |
| IPTKU/D                                    | 10                      | 2709970   | 83.8               | 7.87 - 18.11     | A + 11.81 | 9.84  | 4.13 | -    | 2.36 | 5.98 | 1.02 |


\* Design Factor based on EN 13155 and ASME B30.20.

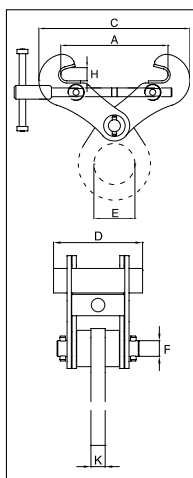


IPTK

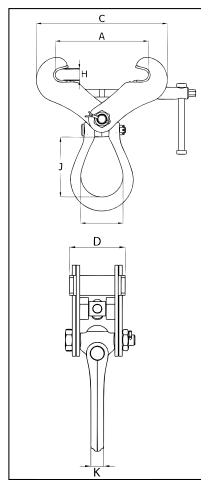

IPTKU

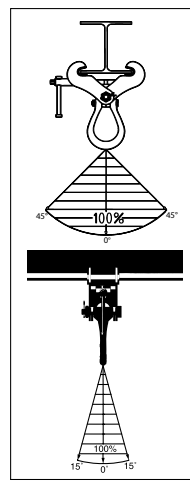

IPTKU

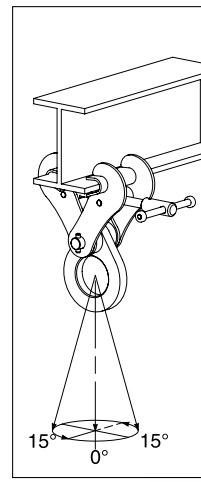

IPTKW