


Lifting Beams

Model 20H - Low Headroom Multiple Spread Lifting Beam

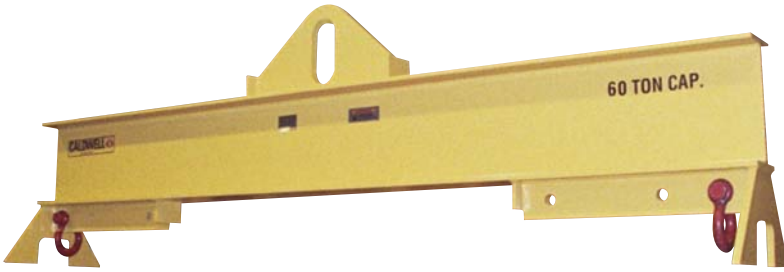

Shown with optional Built-In Stand and different hole placement.

PRODUCT FEATURES:

- 'I' beam construction.
- Three spreads to adjust to the load
 - Outside spread
 - Middle spread (outside less 1')
 - Inside spread (outside less 2')
- Swivel hooks with hook latches standard.
- Wide range of sizes and capacities available.
- Complies with ASME standards.



SPECIFICATIONS

Capacity (tons)	Model Number HR Headroom (in.) Weight (lbs.)	Outside Spread (feet)						
		8	10	12	14	16	18	
1	Model Number HR Headroom Weight							
2	Model Number HR Headroom Weight							
3	Model Number HR Headroom Weight	See pages A.8 and A.9 for these capacities and sizes.						
5	Model Number HR Headroom Weight							
7-1/2	Model Number HR Headroom Weight							
10	Model Number HR Headroom Weight							
15	Model Number HR Headroom Weight					20H-15-16 41.50 1350	20H-15-18 41.75 1610	
20	Model Number HR Headroom Weight				20H-20-14 45.75 1210	20H-20-16 46 1510	20H-20-18 46.25 1885	
25	Model Number HR Headroom Weight				20H-25-14 55.75 1430	20H-25-16 55 1780	20H-25-18 56.75 2110	
30	Model Number HR Headroom Weight		20H-30-10 59.75 1150	20H-30-12 61.50 1395	20H-30-14 61.75 1695	20H-30-16 62 2050	20H-30-18 67.50 2380	
40	Model Number HR Headroom Weight	20H-40-8 71.50 1200	20H-40-10 72 1550	20H-40-12 72.25 1840	20H-40-14 72 2220	20H-40-16 74.75 2400	20H-40-18 75 3100	

Other sizes available, consult factory.

Lifting Beams

NEW

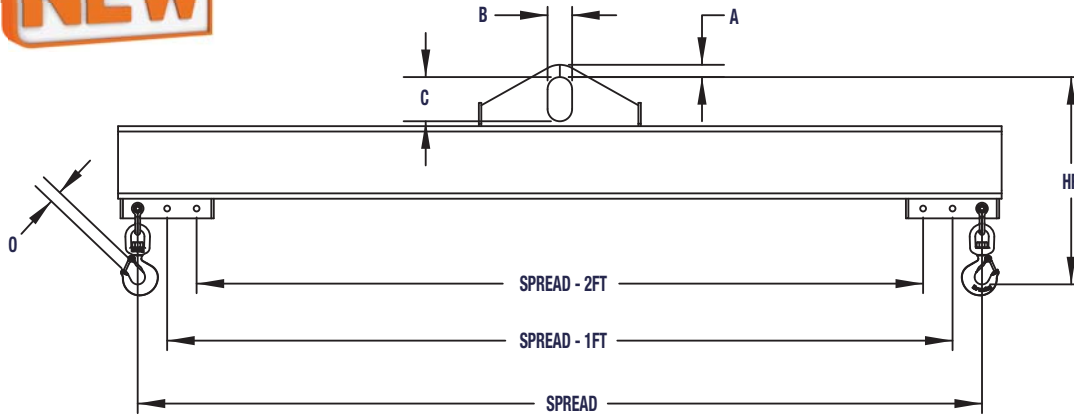

SPECIFICATIONS

Outside Spread (feet)							Other Dimensions (in.)	
20	24	30	34	38	42			
		20H-1-30 24 1250	20H-1-34 24 1605	20H-1-38 24 2120	20H-1-42 26 2810	A=7/8 B=3 C=5	T=3/4 O=7/8	
		20H-2-30 24 1560	20H-2-34 24 2130	20H-2-38 24.50 2680	20H-2-42 26.50 3410	A=1-1/2 B=3 C=5	T=1 O=7/8	
		20H-3-30 27.25 1840	20H-3-34 27.25 2070	20H-3-38 27.50 3110	20H-3-42 29 3890	A=1-1/2 B=3 C=5	T=1 O=1	
		20H-5-30 32 2325	20H-5-34 32 3130	20H-5-38 34 3950	20H-5-42 34 4760	A=2 B=4 C=7	T=1-1/4 O=1-3/8	
20H-7 1/2-20 34.75 1325	20H-7 1/2-24 34.75 1890	20H-7 1/2-30 35 2790	20H-7.5-34 36.75 3560	20H-7.5-38 37 4760	20H-7.5-42 37 5730	A=2 B=4 C=7	T=1-1/4 O=1-5/8	
20H-10-20 35.75 1500	20H-10-24 36 2100	20H-10-30 37.75 3190	20H-10-34 38 4300	20H-10-38 38 5230	20H-10-42 38.50 6910	A=2 B=4 C=7	T=1-1/4 O=1-5/8	
20H-15-20 42 1915	20H-15-24 41.50 2340	20H-15-30 42.25 4255	20H-15-34 42.25 4230	20H-15-38 42.50 6340	20H-15-42 43 8420	A=2-1/2 B=5 C=9	T=1-1/2 O=2-1/16	
20H-20-20 48 2225	20H-20-24 48.50 3155	20H-20-30 49.25 5040	20H-20-34 49.25 6250	20H-20-38 55.25 8170	20H-20-42 55.50 9930	A=2-3/4 B=5 C=9	T=1-1/2 O=2-1/4	
20H-25-20 59.75 2590	20H-25-24 60 3545	20H-25-30 60.75 5380	20H-25-34 64 7425	20H-25-38 64.50 9100	20H-25-42 67.25 11235	A=3 B=6 C=12	T=1-3/4 O=2-1/4	
20H-30-20 67.75 2850	20H-30-24 68 4040	20H-30-30 73.75 5725	20H-30-34 71.75 7930	20H-30-38 69.75 10100	20H-30-42 70 12300	A=3-1/2 B=7 C=16	T=2 O=2-1/4	
20H-40-20 78 3680	20H-40-24 81 4920	20H-40-30 84.25 6810	20H-40-34 77 9310	20H-40-38 80 11500	20H-40-42 83 14510	A=3-1/2 B=7 C=16	T=2-1/2 O=3	



OPTION A

Extra Holes or Different Placement of Holes

Allows multiple hook positioning beyond standard 3 spreads. Specify number and spread(s) required.

OPTION B

Extra Shackles and Swivel Hooks

Allows for multiple pick points or eliminates the need to move hardware for different size loads.



OPTION C

Built In stand

Keeps beam upright for easy crane hook attachment (pictured above).