




How to program an LT Series Receiver to a new LT Transmitter.

1. Remove the cover from the LT Receiver. The screws are located under the four corners of the sticker on the lid.
2. Orient the receiver so that it looks like the picture below.

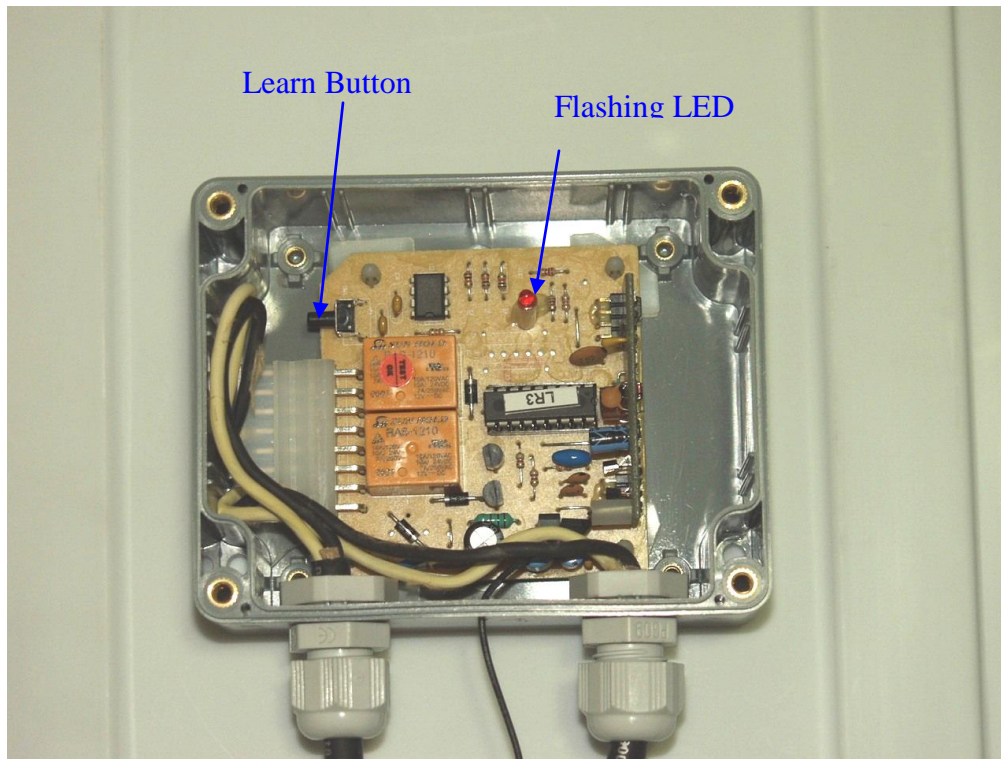

3. If you do not have power already connected, connect now. Either connect directly to your trap battery or through your trap as you normally would. The **red LED** starts flashing.
4. With your finger push the learn button in towards the circuit board, you may feel it click. The **red LED** now stays on constantly.
5. You now have 15 seconds to complete the next step. If you have an LT-100 single button transmitter, press the button once. If you have an LT-200 three button transmitter, press button number 1 once. **WARNING, your trap may fire when the receiver learns the new transmitter.**
6. After the 15 seconds are up the **red LED** will start to flash again. You can now test your new transmitter. Your trap will release when you press a corresponding button.
7. Remember, if you have an LT-200 with two receivers you will need to repeat this procedure on the second receiver. Replace the lid and secure with the four screws. Do not over tighten as this can damage the seal around the lid.

