





BOSSPLOW.COM


See how BOSS continues to BACK YOU UP.
Get more info, watch videos, find a dealer or chat live.

Call 800-286-4155
Email sales@bossplow.com



 Ask your dealer or visit bossplow.com to explore the complete lineup of BOSS products, including Truck Plows, ATV/UTV Plows, Box Plows, Spreaders and Accessories.

 Exclusive to BOSS Owners, joining this community gives you a profile page, a free gift and access to special offers and information on BOSS products and services.

 SnowCare for Troops is a nationwide outreach program that performs free snow removal for the families of men and women serving overseas and disabled veterans.

 
The Cooperative Purchasing Network
ENHANCED PORTFOLIO * UNIFIED FOCUS * CONTINUED TRUST



BOSS PRODUCTS
2010 THE BOSS WAY
P.O. BOX 787
IRON MOUNTAIN, MI 49801-0787

BOSS SNOWPLOW PRODUCTS
ARE DESIGNED AND MANUFACTURED IN
AN APPROVED ISO 9001:2008
REGISTERED FACILITY.

Patents: www.tccopats.com
©2016 BOSS PRODUCTS. ALL RIGHTS RESERVED.
PRINTED IN U.S.A. FORM #450-2016

The "f" logo is a registered trademark/service mark of Facebook, Inc. The Twitter bird is a registered trademark/service mark of Twitter, Inc. The YouTube and Google+ logos are registered trademarks/service marks of Google Inc. The "in" logo is a registered service mark of LinkedIn Corporation. The Instagram logo is a registered trademark/service mark of Instagram, LLC. The Blogger logo is a registered service mark of Google Inc. The National IPA logo is a service mark of the National Intergovernmental Purchasing Alliance Company. The TCPN logo is a registered service mark of TCPN Management Group LLC. The Sheffield Financial logo is a registered service mark of BB&T Corporation. The Advantage International Registrar logo is a trademark of Advantage International Registrar, Inc. All other trademarks belong to BOSS Snowplow.



SPREADERS 2016



RESTORE ORDER AT THE SPEED OF THE STORM

BOSS designs their spreaders for the purpose of making the lives of snow and ice removal professionals easier and more efficient. So while the front of your vehicle is fighting to clear the street of all things snow and ice, the back of your vehicle is putting the finishing touches on the parking lots, driveways and roads of the towns you call home. Because when you're out in the middle of it, BOSS will always be there to BACK YOU UP.



QUICK TO ATTACH QUICKER TO RESPOND

- > TGS 300 TGS 800
- TGS 600 TGS 1100

The TGS Spreader series from BOSS is the easiest way to arm yourself against all things snow and ice. BOSS tailgate-mounted spreaders attach easily and disperse deicing materials quickly and efficiently to make your job as smooth and steady as possible. All TGS Spreaders are built tough to handle harsh conditions, because BOSS knows the faster you can RESTORE ORDER to your community, the better.

STANDARD FEATURES:

- > **Adjustable Feed Gate** allows you to adjust the material discharge amount.
- > **Poly Adjustable Material Deflector** allows you to adjust the material discharge pattern.
- > **12" Diameter Urethane Spinner** is durable, corrosion-resistant and ensures consistent distribution.
- > **Enclosed 12-Volt Electric High-Torque Motor** is weather and dust sealed to ensure performance, durability and reliability.
- > **Low-Profile Poly Hopper Design** provides better visibility.
- > **Variable Speed Control** equipped with blast feature and overload protection.
- > **Solid Poly Hopper Cover** seals out moisture and is made to last.
- > **Choose Your Attachment System** a slide-in system or the RT3 system (RT3 not available on TGS 300).
- > **Stabilizer Arms and Tie-Down Straps** minimize any side-to-side movement (not available on TGS 300).
- > **Top Screen With Bag Splitter** easily opens bags and filters deicing material (bag splitter not included on TGS 300).
- > **Enclosed Feed Paddle Motor** powers the Feed Paddle Mechanism with 12 volts of high-torque electric power (TGS 800 only).
- > **Swing-Away Spinner Assembly** allows for quick removal of leftover material (TGS 800 only).
- > **Two-Year Limited Warranty** protects against material defects for peace of mind.
- > **Material Saver System** eliminates material flow when spreader is not in use (optional on the TGS 600 and TGS 1100, not available on TGS 800).
- > **For Optional Accessories, Ask Your BOSS Dealer.**

The selection of proper deicing materials can be complicated and varies by personal preference, experience and environmental concerns. All factors should be considered before making your selection.



TGS 300 fits on vehicles with Class 2-4 hitches.



TGS 1100 has a capacity of 11 cubic feet, or 800 lb.

TGS 800 can spread sand in addition to salt & deicers.

TGS 600 has a spread width of 4-30 feet.



Optional RT3 Attachment System allows you to easily attach/detach your spreader (not available on TGS 300).



SPEED AND PRECISION ON EVERY PASS

- > **VBX 3000** **VBX 8000**
- > **VBX 6500** **VBX 9000**

BOSS VBX Spreaders are some of the most powerful tools in your snow and ice removal arsenal. Our fast-growing family of VBX Spreaders are fully featured for ease of use and maximum productivity for years of operation in harsh winter conditions. The newest addition to the lineup is the VBX 6500, which performs just as powerfully and reliably as the others in a mid-size package. The VBX family features models with both pindle and auger feeds, powerful electric motors, standard worklights, easy to use controls and the flexibility to spread a variety of deicing materials. BOSS builds quality and durability into every spreader, helping you to RESTORE ORDER.

 LEARN MORE ABOUT BOSS PRODUCTS
BOSSPLOW.COM

STANDARD FEATURES:

- > **Pindle Chain or Auger Feed System** features either a heavy-duty pindle chain or mild steel helical auger for long life and reliability (excludes VBX 3000).
- > **Chain Cleaning Brush** removes excess material from chain on every pass, extending chain life span (on pindle chain only).
- > **Shaftless 4" Auger With 4" of Pitch** prevents jamming and requires less power to move material vs. traditional augers (VBX 3000 only).
- > **Poly Hopper** is built to outlast the elements.
- > **14.5" Diameter Urethane Spinner Motor** is sealed for durability and maximum spreading efficiency (excludes VBX 3000).
- > **12" Diameter Urethane Spinner Motor** is sealed for durability and maximum spreading efficiency (VBX 3000 only).
- > **Full-Length Slide-Out Tray** captures falling deicing material, keeping it away from truck bed, preventing corrosion (on pindle chain only).
- > **Dual-Variable Speed Controller** is equipped with auto-reverse and over-load protection (excludes VBX 3000).
- > **LCD Screen Controller** is backlit for clear visibility and ease of use (excludes VBX 3000).
- > **Dual Motor Control** adjusts material flow and speed on the fly (VBX 3000 only).
- > **Two-Year Limited Warranty** protects against material defects for peace of mind.

VBX 3000 UTV SPREADER



- Heavy-Duty Top Screen
- 12 Cubic Feet of Capacity
- Tarp With Integral Tie-Downs
- Dual Worklight
- Rear-Mounted Dump Switch
- Standard Vibrator
- Sealed Motor Compartment
- 1/4 Horsepower High-Torque Stainless Steel Motor
- Urethane Spinner

POWERFUL TOOLS TO BACK UP YOUR TRUCK

- > Heavy-Duty Top Screen
- > Sealed Motor Compartment
- > Auxillary Lighting With Remote Switch
- > Ratchet Strap Hooks
- > 1/2 Horsepower High-Torque Motor With Stainless Steel Drive Train and Heavy-Duty Planetary Worm Gears
- > Rear-Mounted Dump Switch



VBX 6500
1.5 cubic yards of capacity

VBX 8000
2 cubic yards of capacity

VBX 9000
3 cubic yards of capacity

VBX SPREADERS

VEHICLE APPLICATION: FULL-SIZE UTVs

VEHICLE APPLICATION: 3/4, 1-TON, DUMP BODY AND FLATBED TRUCKS

SPECIFICATIONS	VBX 3000	VBX 6500 AUGER / PINTLE CHAIN	VBX 8000 AUGER / PINTLE CHAIN	VBX 9000 AUGER / PINTLE CHAIN
Hopper Capacity	12 cu ft (0.34 cu m)	1.5 yards	2 yards	3 yards
Hopper Length	33½" (85 cm)	78" (198.1 cm)	96" (244 cm)	107" (272 cm)
Hopper Overall Length	52" (132 cm)	93½" (237.5 cm)	115" (292 cm)	126" (330 cm)
Hopper Height	28" (71 cm)	38¾" (97 cm)	38" (97 cm)	49" (124.5 cm)
Hopper Width	50" (127 cm)	48¼" (122.6 cm)	48¼" (123 cm)	48" (122 cm)
Full Unit Weight	230 lb (104 kg)	550 lb (250 kg) / 600 lb (272 kg)	600 lb (272 kg) / 650 lb (295 kg)	700 lb (322 kg) / 760 lb (345 kg)
Hopper Construction	¾" (0.5 cm) Double Wall Polyethylene Hopper	¾" (0.5 cm) Double Wall Polyethylene Hopper	¾" (0.5 cm) Double Wall Polyethylene Hopper	¾" (0.5 cm) Double Wall Polyethylene Hopper
Spread Width	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material
Max Feed Rate	N/A	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute
Lighting	Single 55 watt halogen	Dual 55 watt halogen variable output worklights	Dual 55 watt halogen variable output worklights	Dual 55 watt halogen variable output worklights
Cover	VCP Tarp w/integral tie-downs	VCP Tarp w/integral tie-downs	VCP Tarp w/integral tie-downs	VCP Tarp w/integral tie-downs
Top Screen	Standard	Standard	Standard	Standard
Gearbox	N/A	Planetary Gearbox	Planetary Gearbox	Planetary Gearbox
Motor	¼ HP Feed Motor	¾ HP SS Feed Motor	¾ HP SS Feed Motor	¾ HP SS Feed Motor
Trough	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel	304 Stainless Steel
Cab Controller	Standard	LCD Display Controller	LCD Display Controller	LCD Display Controller
Dual Variable Speed Control	N/A	Standard	Standard	Standard
Single Vibrator	Standard	N/A	N/A	N/A
Dual Variable Speed Vibrators	N/A	Standard / Optional	Standard / Optional	Standard / Optional
Single Vibrator	Standard	N/A	N/A	N/A
Inverted V Baffle	Standard	Standard / Optional	Standard / Optional	Standard / Optional
Feed System	4" OD x 4" (10 cm x 10 cm) pitch shaftless full length Auger	6" OD x 9" (15 cm x 23 cm) pitch full length Auger / 14" (36 cm) wide Pintle Chain	6" OD x 9" (15 cm x 23 cm) pitch full length Auger / 14" (36 cm) wide Pintle Chain	6" OD x 9" (15 cm x 23 cm) pitch full length Auger / 14" (36 cm) wide Pintle Chain
LED CHMSL	N/A	Standard	Standard	Standard
Adjustable Deflector	Standard	Standard	Standard	Standard
Spinner Assembly	Easily removable	Easily removable and height adjustable	Easily removable and height adjustable	Easily removable and height adjustable
Hopper Tie-Down Kit	Standard	Standard	Standard	Standard
Spinner	12" (30.5 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner
Spinner Gearmotor	¼ HP Spinner Gearmotor (Located above spinner)	¼ HP Spinner Gearmotor (Located above spinner)	¼ HP Spinner Gearmotor (Located above spinner)	¼ HP Spinner Gearmotor (Located above spinner)
Minimum Bed Length	33½" (85.1 cm)	5'6" (167.6 cm)	6'6" (198.1 cm)	8' (243.8 cm)
GVWR	1,000 lb Bed Capacity Required	9,000 lb Gross Vehicle Weight Required	10,000 lb Gross Vehicle Weight Required	13,000 lb Gross Vehicle Weight Required

See Spreader Material Guide on Page 6 for more details on material spreading options.


TAILGATE SPREADERS

VEHICLE APPLICATION: 4X4s, SUVs and 1/2 TO 1-TON TRUCKS

SPECIFICATIONS	TGS 300*	TGS 600*	TGS 800**	TGS 1100*
Hopper Design	Low-profile	Low-profile	Low-profile	Low-profile
Hopper Construction	Polyethylene	Polyethylene	Polyethylene	Polyethylene
Hopper Capacity	3 cu ft / 200 lb (0.08 cu m / 91 kg)	6 cu ft / 400 lb (0.2 cu m / 181 kg)	8 cu ft / 780 lb (0.2 cu m / 354 kg)	11 cu ft / 800 lb (0.3 cu m / 363 kg)
Hopper Dimensions	21½"H x 29"W x 15"D (53 cm x 74 cm x 38 cm)	25¾"H x 38"W x 21"D (65 cm x 97 cm x 53 cm)	48"H x 36"W x 21"D (122 cm x 91 cm x 53 cm)	34"H x 44"W x 24"D (86 cm x 112 cm x 61 cm)
Spreader Weight	70 lb (31 kg) plus mount	101 lb (46 kg) plus mount	220 lb (160 kg) plus mount	152 lb (69 kg) plus mount
Hopper Cover	Solid poly	Solid poly	Solid poly	Solid poly
Feed Mechanism	Internal auger w/material saving brush and adjustable drop-feed gate	Internal auger with cable-link agitator and adjustable feed gate	Feed paddle	Internal auger with cable-link agitator and adjustable feed gate
Vibrator Kit	Not recommended	Optional	Optional	Optional
Top Screen with Bag Opener	Top Screen Only	Standard	Standard	Standard
Motor	High-torque / 12-volt DC	High-torque / 12-volt DC	High-torque / 12-volt DC	High-torque / 12-volt DC
Spinner	12" (31 cm) Poly	12" (31 cm) Poly	12" (31 cm) Poly	12" (31 cm) Poly
Spread Width	4 - 30 feet (1 - 9 meters)	4 - 30 feet (1 - 9 meters)	4 - 20 feet (1 - 6 meters)	4 - 30 feet (1 - 9 meters)
Material Deflector	Adjustable poly deflector	Adjustable poly deflector	Adjustable poly deflector	Adjustable poly deflector
Receiver Class Hitch	Class 2-4	Class 3 or 4	Class 4	Class 4
Control	Variable speed control with blast feature and overload protection	Variable speed control with blast feature and overload protection	Independent controls for material feed and spinner speed	Variable speed control with blast feature and overload protection
Vehicle Applications	SUV, light truck and up	¾ and 1-ton trucks	¾ and 1-ton trucks	¾ and 1-ton trucks

*Designed to spread dry, free-flowing material (i.e., salt, deicers, etc.). **Designed to spread sand, salt or a combination of both. See Spreader Material Guide on Page 6 for more details on material spreading options.

BOSS SNOWPLOW SPREADER MATERIAL GUIDE

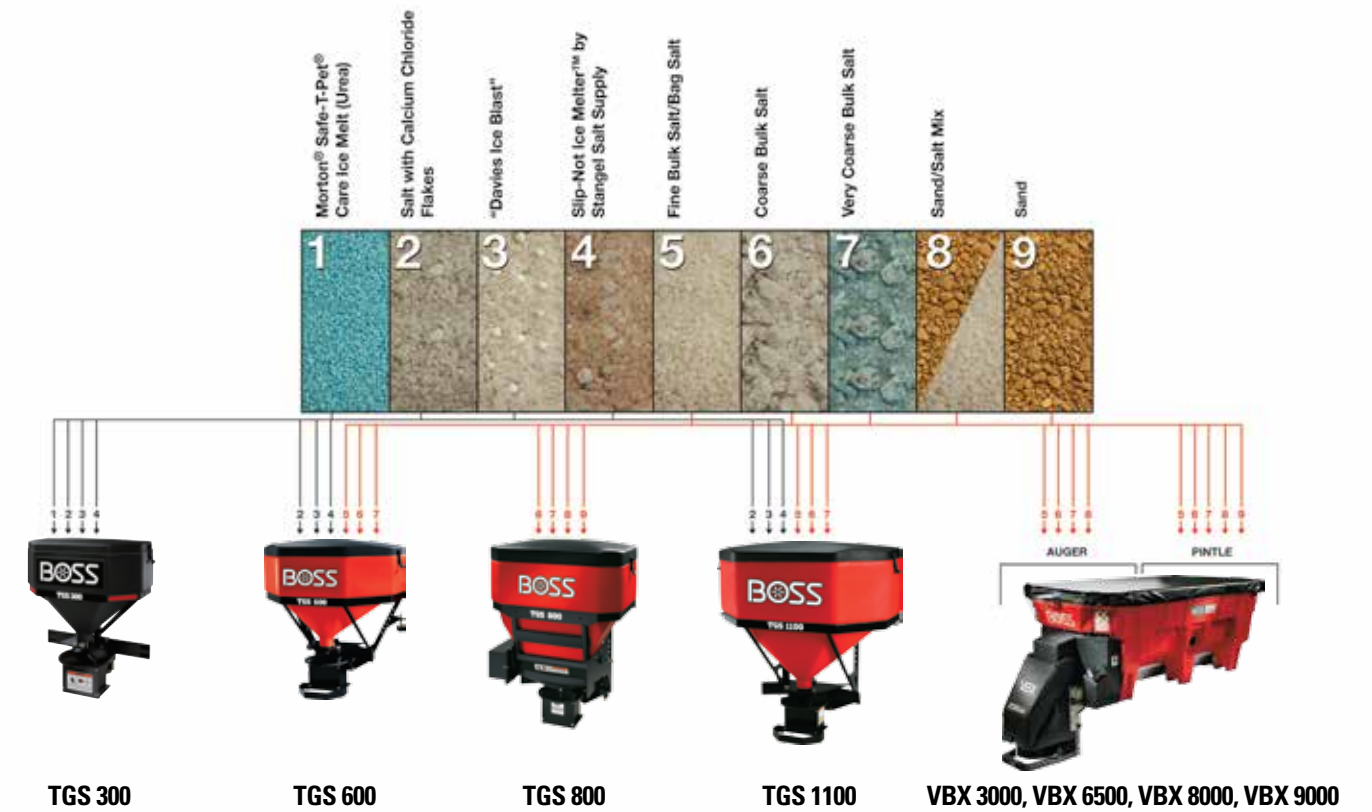

NOTE: Assumes Dry, Free-Flowing Material

GIVING YOU EVERYTHING YOU NEED TO RESTORE ORDER

QUESTIONS? CHAT LIVE ONLINE. BOSSPLOW.COM

Ask your BOSS Dealer or visit bossplow.com to browse the full family of BOSS products, including Truck Plows, ATV/UTV Plows, Box Plows, Spreaders, Accessories and more.

DON'T FORGET TO ASK ABOUT ZERO DOWN FINANCING WITH NO PAYMENTS AND NO INTEREST FOR 6 MONTHS.*

*Commercial Use Customers Only. Ask your BOSS Dealer or visit bossplow.com for more details. Program Subject to Change.

BOSS EXTENDED FAMILY

