

# UV sensor UVS 10

Product brochure - GB  
3.1.6.4 Edition 08.09




CE

krom  
schroder

- Suitable for small burners due to high sensitivity
- Virtually immune to interference due to its insensitivity to daylight, infrared radiation and incandescent bulbs
- Maximum safety thanks to protection against discontinuity or short-circuit on the flame signal cable
- Lower logistics costs as the UVS 10 replaces several previous models
- Suits industrial needs due to robust design
- Complies with the requirements of EN 298 in conjunction with Elster Kromschroder automatic burner control units



## Application

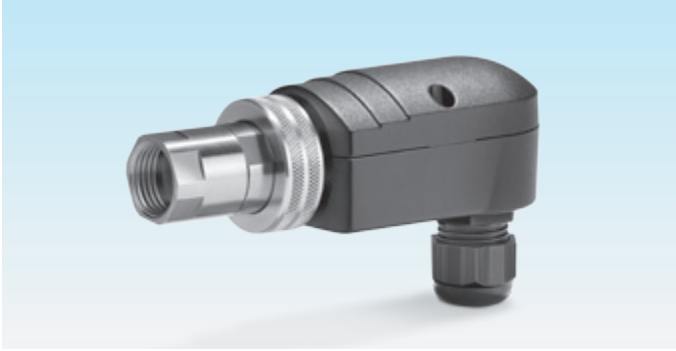

For monitoring gas burners of unlimited capacity with or without fan, on hot-air furnaces, gas-fired boilers, industrial furnaces and excess-gas flaring installations in conjunction with Elster Kromschroder burner control units and automatic burner control units.

The UV sensor monitors the gas burners in intermittent operation.

The burners can either be ignited directly or operated as pilot and main burners.

UV sensors UVS 1, UVS 6 and UVS 8 can be replaced by using various adapters.

## Certification



For certification, see Technical Information of the corresponding automatic burner control unit or burner control unit that the UV sensor is to be used with.

## Maintenance cycles

Service life of the UV tube: 10,000 operating hours.

The UV tube must be replaced after this period.

## Replacement possibilities

UVS 1 is to be replaced by UVS 10D4G1 (be sure to install new connection cables).

UVS 6 is to be replaced by UVS 10D0G1.

UVS 8 is to be replaced by UVS 10D2 (be sure to install new connection cables).

Replacement for UVS 5 available on request.

## Selection

Type	G1*
UVS 10D0	●
UVS 10D1	●
UVS 10D2	
UVS 10D3	
UVS 10D4	●
UVS 10L0	●
UVS 10L1	●
UVS 10L2	
UVS 10L3	

**Order example**  
UVS 10L0G1

\* If "none", this specification is omitted. ● = standard, ○ = available

## Typenschlüssel

Code	Description
UVS	UV sensor
10	Series 10
D	Quartz glass heat guard
L	Quartz glass heat guard lens
0	Rp 1/2 internal thread
1	Rp 1/2 internal thread and cooling air connection
2	1/2 NPT internal thread
3	1/2 NPT internal thread and cooling air connection
4	UVS 1 adapter (28 mm (1.1"))
G1	<b>Electrical connection</b> M20 cable gland

## Technical data

Aluminium housing with integrated heat guard, with connection terminals.

Distance between UV sensor and flame: 300 – 400 mm.

UV tube: P578, spectral range: 190 – 270 nm, max. sensitivity: 210 nm ± 10 nm.

Service life of the UV tube: approx. 10,000 operating hours.

Min. DC signal: 1 µA.

Enclosure: IP 65.

Ambient temperature: -40 to +80°C (-40 to +176°F).

Weight: 280 g (0.6 lbs).

Max. length of cable UV sensor – automatic burner control unit: see instructions for automatic burner control unit.

## Detailed information on this product

[www.docuthek.com](http://www.docuthek.com) → Direct access

Search term: UVS 10

Kind of document: Technical information

## Contact

[www.kromschroeder.com](http://www.kromschroeder.com) → Sales

Elster GmbH  
Postfach 2809 · 49018 Osnabrück  
Strothweg 1 · 49504 Lottje (Büren)  
Germany

T +49 541 1214-0  
F +49 541 1214-370  
info@kromschroeder.com  
www.kromschroeder.com  
www.elster.com

Kromschroder, a product  
brand of the Elster Group



We reserve the right to make technical modifications in the interests of progress.

Copyright © 2007 Elster Group  
All rights reserved.