



Vertical Feed Mixers

Single Auger – VN/VC Series

Specifications:	VN-6	VN-8	VC-10	VC-12	VC-14
Empty Weight	5,732 lbs	7,275 lbs	7,584 lbs	7,981 lbs	8,267 lbs
Max. Payload at 20 MPH	13,756 lbs	13,756 lbs	13,756 lbs	13,756 lbs	13,756 lbs
Height	94.4"	104"	109"	121"	131.6"
Overall Width	83.6"	93.5"	93.5"	93.5"	93.5"
Overall Length	160"	176.5"	178"	178"	178"
Min. PTO Power Required	50 HP	65 HP	75 HP	80 HP	85 HP
Capacity Struck Level	211 Cu. Ft.	282 Cu. Ft.	352 Cu. Ft.	422 Cu. Ft.	493 Cu. Ft.


Tatoma reserves the right to change designs and specifications without notice.



Tatoma's Mixing System and Auger Design Benefits:

- ✓ Proven Consistent Mixing by Nutritionist
- ✓ Low Power Consumption
- ✓ Ideal Product Flow
- ✓ Maximum Use of Tub Mixing Volume
- ✓ Respects the Structure of the Ingredients of the Mixture

Quality Mixers Since 1981

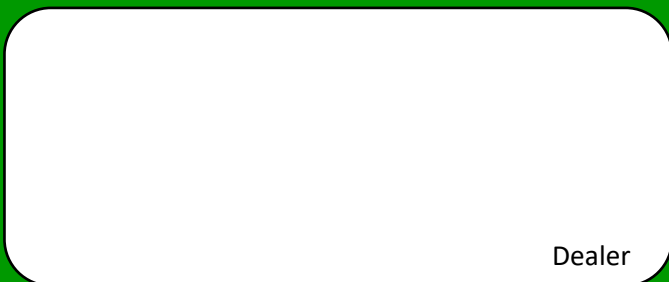

Dealer

Tatoma USA
 6238 Highway 412
 Colcord, OK 74338
 (918) 422-4271
 (479) 228-4580

sstovall@grupotatoma.com
 tatomainfo@centurylink.net
 mcantos@grupotatoma.com

www.TatomaUSA.com



Search for:
Tatoma USA





Vertical Feed Mixers

Single Auger – VN/VC Series



VN-10 Pictured with optional 2 speed gear box

Models:

VN-6 (211 Cubic Foot)

VN-8 (282 Cubic Foot)

VC-10 (352 Cubic Foot)

VC-12 (422 Cubic Foot)

VC-14 (493 Cubic Foot)

Standard Features:

- High Quality ST52 Steel Construction
- One Vertical Auger
- Drop Chute
- 3 Weight Cells (2 1/8") VN Models
4 Weight Cells (2 1/8") VC Models
- 2 Manual Restrictor Plates
- Simple Ladder
- Side Door Discharge
- Programmable Scale Indicator
- Direct Drive (No 2 Speed)
- Direct Hoses to Tractor
- Manual Jack
- 2 Traction Tread Tires
- 540 RPM PTO
- 7 Knives



VC-14 Pictured with optional conveyor and controls by cable

Optional 2 Speed:



Optional Conveyor:

