

With Side Chute	Model	Length with closed door	Width with chute down	Height with chute down	PTO HP Required	Number of Beaters
EM	350	155"	97"	98.7"	80	1
EM	650	222"	97"	98.7"	90	1
E/D	350	147.4"	97"	98.7"	80	0
E/D	650	214.6"	97"	98.7"	90	0
EM	810	214.6"	88.6"	91.1"	95	2
EM	1010	270.9"	95"	91.1"	100	2
EM	1010-T	270.9"	95"	91.1"	110	3
EM	1210	305"	95"	91.1"	100	2
EM	1210-T	305"	95"	91.1"	110	3
EM	1500	270.9"	114.6"	132.3"	125	3
EM	2000	347.2"	114.6"	132.3"	150	3

With Top Rotary Chute	Model	Length with closed door	Width with chute down	Height with chute down	PTO HP Required	Number of Beaters
EM	350	155"	93.7"	98.7"	80	1
EM	650	222"	93.7"	98.7"	90	1
E/D	350	147.4"	93.7"	98.7"	80	0
E/D	650	214.6"	93.7"	98.7"	90	0
EM	810	214.6"	85.2"	91.1"	95	2
EM	1010	270.9"	95"	91.1"	100	2
EM	1010-T	270.9"	95"	91.1"	110	3
EM	1210	305"	95"	91.1"	100	2
EM	1210-T	305"	95"	91.1"	110	3
EM	1500	270.9"	114.6"	103"	125	3
EM	2000	347.2"	114.6"	103"	150	3

Tatoma reserves the right to change designs and specifications without notice.

Dealer



Tatoma USA
 6238 Highway 412
 Colcord, OK 74338
 (918) 422-4271
 (479) 228-4580

sstovall@grupotatoma.com
 tatomainfo@centurylink.net
 mcantos@grupotatoma.com

www.TatomaUSA.com



Search for:
Tatoma USA



E-Series




The E-Series chopping system has blades on the turbine, allowing straw and silage to be chopped and distributed. Used for bedding and feeding. Cut material will be between 2 and 6 inches long. Accepts material with high moisture content.

E-Series is available in 350 and 650 models only!

Available with optional horizontal chopping roller for a more aggressive and faster cut.

EM-Series

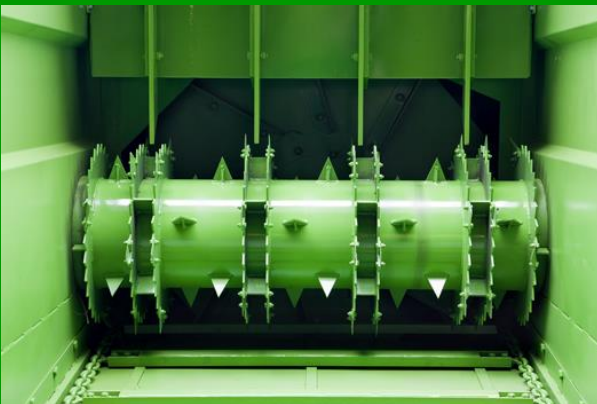

The EM-Series cuts a little faster than the E-Series. Available with a second horizontal chopping roller on the 350 and 650 models for a more aggressive and faster operation.

The EM-Series has a horizontal chopping roller with blades. It has a control system that controls the entry of the bale to avoid jamming. Silage, hay, or straw is chopped and distributed as feed or bedding. Cut material is between 2 and 4 inches long. Accepts high moisture material.

Models 350 and 650 – 1 roller standard

Models 810, 1010, and 1210 – 2 rollers standard

Models 1010-T, 1210-T, 1500, and 2000 – 3 rollers standard

D-Series



The D-Series has cutting blades on the turbine surrounded by a screen. Hammers force the material through the screen for a very fine cut and uniform chopping. Designed to produce poultry bedding or any operation where a very fine, uniform cut is desired. Cut material is 1 to 2 inches long. Accepts only dry material.

D-Series is available in 350 and 650 models only!

Options:



Additional Chopping Roller

For 350 and 650 Models only



3 Point

Available in 350 Model Only



Electronic Controls



30° x 30° Swivel Cap

Swivels from left to right to get to some of those hard to reach points while bedding. Hydraulic operated.



300° Rotary Chute

Option to discharge on either side by hydraulics.



Straw Choppers



Series:

E Series
EM Series
D Series

Models:

350
650
810
1010
1010-T
1210
1210-T
1500
2000

Tatoma straw choppers are designed to fit many types of operation, insuring the best feed or bedding for your animals. Tatoma straw choppers are very efficient when chopping wet material and corn stalks for feed or bedding. Several models are available, tailored to the size of your operation and number of animals. Tatoma straw choppers are compact and are highly durable.

All Tatoma straw choppers consist of a rectangular box. The material is brought toward the chopping system with a variable speed chain and crossbar. They come standard with a 2-speed gearbox to control discharge rates allowing material to be blown long distances and spread or placed in a windrow.