



FULL PRODUCT RANGE BROCHURE



Hydraulic Catwalk Benefits Overview

- Safety – the fully mechanized process keeps personnel clear of hazardous operations using a wireless remote at the rig floor
- Time saving and safe set up / tear down using built in hydraulics - no need for expensive cranes
- Productivity maximized through repeatable dependable operation
- Optimal tubular presentation for safe handling at the rig floor
- Range of rig floor heights from 6' to 42'
- Easy transportation as a single load
- Proven design and track record, with an unbeatable safety record, incredible uptime, reliability and longevity
- Electric driven self contained hydraulic power unit
- Numerous safety features and failsafe devices
- Easy to learn operation

Service Rig Catwalks – C3



STANDARD FEATURES

- Hydraulically adjustable presentation height range between 8' 6" and 21'
- Adjustable angle on ramp
- Self contained hydraulic power unit
- Skate and ramp style design
- Ramp folds hydraulically for transport
- Durable urethane paint finish
- Easy to learn operation
- Comprehensive owner's manual
- 24/7 service and support

OPTIONAL FEATURES

- Hydraulic levelling cylinders on all corners
- Wireless Remote Control
- Cold climate package rated for -40°C
- Range 3 tubular handling (weight increases to 12,500lbs, length increases to 52')
- Diesel HPU (increases length)

STANDARD SPECIFICATIONS

Presentation Height Range	8' 6" to 21'
Maximum Tubular Length	Range III
Maximum Tubular OD	10-3/4"
Maximum Tubular Weight	2,000 lbs
Weight (without options)	11,000 lbs
Length	43'
Hydraulic Power Unit	Electric
Power Requirement	15 HP
Cycle Time	25 seconds

Service Rig Catwalks – C3T



STANDARD FEATURES

- Hydraulically adjustable presentation height range between 8' 6" and 23'
- Adjustable angle on ramp
- Integrated 20' long manual Pipe Racks
- Self contained hydraulic power unit
- Skate and ramp style design
- Ramp folds hydraulically for transport
- Durable urethane paint finish
- Easy to learn operation
- Comprehensive documentation
- 24/7 service and support

OPTIONAL FEATURES

- Hydraulic levelling cylinders on all corners
- Wireless Remote Control
- Cold climate package rated for -40°C
- Diesel HPU

STANDARD SPECIFICATIONS

Presentation Height Range	8' 6" to 23'
Maximum Tubular Length	Range III
Maximum Tubular OD	10-3/4"
Maximum Tubular Weight	2,000 lbs
Maximum Pipe Rack Load	30,000
Weight (without options)	19,500 lbs
Length	53'
Hydraulic Power Unit	Electric
Power Requirement	25 HP
Cycle Time	25 seconds



Service Rig Catwalks – C4 / C4S



STANDARD FEATURES

- Goose neck tandem axle trailer for work over rigs
- Self contained diesel hydraulic power unit
- Hydraulically adjustable carrier for presentation heights between 6' and 30'
- Levelling jacks on all corners
- Lifting Carrier design
- Durable urethane paint finish
- Comprehensive owner's manual
- 24/7 service and support

OPTIONAL FEATURES

- Wireless Remote Control
- Hydraulic levelling jacks
- 12' Pipe Racks instead of Picker Arms
- Automated tubular presentation

STANDARD SPECIFICATIONS

Presentation Height Range	6' to 30'
Maximum Tubular Length	Range III
Maximum Tubular OD	9-5/8"
Maximum Tubular Weight	2,000 lbs
Weight (without options)	16,000 lbs
Length	49' 2-1/2"
Hydraulic Power Unit	Diesel
Power Requirement	48 HP
Cycle Time	30 seconds

Drilling Rig Catwalks – C14



STANDARD FEATURES

- Automatic presentation mode
- Wireless Remote Control
- Hydraulically adjustable presentation height range between 6' and 36'
- Self contained hydraulic power unit
- Hydraulic pipe racks on both sides of deck
- Hydraulic leveling cylinders on all corners
- Lifting Carrier design
- Durable urethane paint finish
- Easy to learn operation
- Comprehensive owner's manual
- 24/7 service and support

OPTIONAL FEATURES

- Cold climate package rated for -40°C
- Truck Loading System
- Walking System

STANDARD SPECIFICATIONS

Presentation Height Range	6' to 36'
Maximum Tubular Length	Range III
Maximum Tubular OD	20"
Maximum Tubular Weight	6,000lbs
Maximum Pipe Rack Load	30,000lbs
Weight (without options)	40,000lbs
Length	54'
Cycle Time	30 seconds

Drilling Rig Catwalks – C16



STANDARD FEATURES

- Open belly design for skidding over wellheads on a pad rig.
- Wireless remote control operation, with backup system
- Hydraulic pipe racks on both sides of deck
- Hydraulic V-door unfold / fold
- Hydraulic leveling cylinders
- Electric driven self contained hydraulic power unit
- Designed to be transported in a single load by winch deck truck
- Low maintenance costs
- Energy efficient load sensing pump
- Skate style design with automatic hydraulic cable tensioning
- Stairs on V-door
- Non-slip coating on deck
- Durable urethane paint finish
- 24/7 service and support

OPTIONAL FEATURES


- De-gasser, steam and choke lines underneath deck
- Cold climate package rated for -40° C
- Stairs on V-door
- Wheel Set
- Walking System

STANDARD SPECIFICATIONS

Sub-floor Height Range	12' to 17' ±
Maximum Tubular Length	Range III
Maximum Tubular OD	20"
Maximum Tubular Weight	7,000lbs
Maximum Pipe Rack Load	30,000lbs
Weight (without options)	44,000lbs
V-door Angle	45°
Length	58'
Deck Height	46"
Cycle Time	20 seconds

±V-door supplied for one floor height

Drilling Rig Catwalks – C18

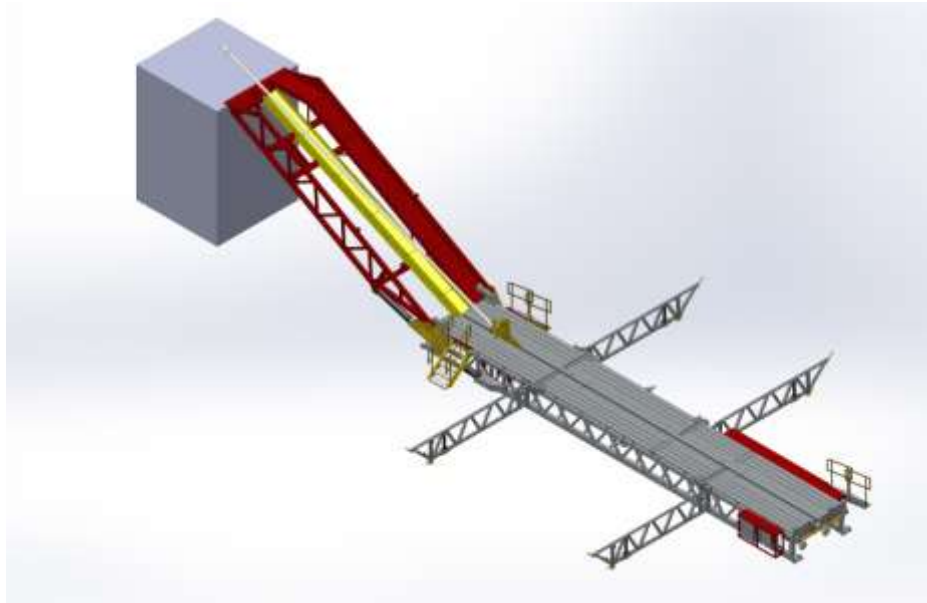

STANDARD FEATURES

- Open belly design for skidding over wellheads on a pad rig.
- Wireless remote control operation, with backup system
- Hydraulic pipe racks on both sides of deck
- Hydraulic V-door unfold / fold
- Hydraulic leveling cylinders
- Electric driven self contained hydraulic power unit
- Designed to be transported in a single load by winch deck truck
- Low maintenance costs
- Energy efficient load sensing pump
- Skate style design with automatic hydraulic cable tensioning
- Non-slip coating on deck
- Durable urethane paint finish
- 24/7 service and support

OPTIONAL FEATURES

- De-gasser, steam and choke lines underneath deck
- Cold climate package rated for -40°C
- Stairs on V-door
- Wheel Set

STANDARD SPECIFICATIONS

Sub-floor Height Range	12' to 18' ‡
Maximum Tubular Length	Range III
Maximum Tubular OD	24"
Maximum Tubular Weight	10,000lbs
Maximum Pipe Rack Load	30,000lbs
Weight (without options)	54,000lbs
V-door Angle	45°
Length	58'
Deck Height	46"
Cycle Time	20 seconds

‡V-door supplied for one floor height

Drilling Rig Catwalks – C28



STANDARD FEATURES

- Wireless Remote Control
- Automatic presentation mode
- Hydraulically adjustable presentation height range between 6' and 36'
- Self contained hydraulic power unit
- Hydraulic pipe racks on both sides of deck
- Hydraulic levelling cylinders on all corners
- Lifting Carrier design
- Durable urethane paint finish
- Easy to learn operation
- Comprehensive owner's manual
- 24/7 service and support

OPTIONAL FEATURES

- Cold climate package rated for -40 °C

STANDARD SPECIFICATIONS

Sub-floor Height Range	6' to 36'
Maximum Tubular Length	Range III
Maximum Tubular OD	20"
Maximum Tubular Weight	10,000lbs
Maximum Pipe Rack Load	30,000lbs
Weight (without options)	50,000lbs
Length	59' 8"
Cycle Time	36 seconds

Drilling Rig Catwalks – C40



STANDARD FEATURES

- Automatic presentation mode
- Wireless Remote Control
- Hydraulically adjustable presentation height range between 6' and 42'
- Self contained hydraulic power unit
- Hydraulic Picker Arms on both sides of deck
- Hydraulic levelling cylinders on all corners
- Lifting Carrier design
- Durable urethane paint finish
- Easy to learn operation
- Comprehensive owner's manual
- 24/7 service and support

OPTIONAL FEATURES

- Cold climate package rated for -40°C

STANDARD SPECIFICATIONS

Sub-floor Height Range	6' to 42'
Maximum Tubular Length	Range III
Maximum Tubular OD	20"
Maximum Tubular Weight	10,000lbs
Maximum Pipe Rack Load	30,000lbs
Weight (without options)	60,000lbs
Length	62' 4"
Cycle Time	44 seconds



Hydraulic Pipe Tub – PT5



STANDARD FEATURES

- **Hydraulically controlled**
- **Designed to be transported in a single load by winch deck truck**
- **Durable paint finish**
- **Easy to learn operation**
- **Comprehensive owner's manual**
- **24/7 service and support**

OPTIONAL FEATURES:

- **Hydraulic levelling cylinders on all corners**
- **Wireless Remote Control**
- **Hydraulic Power Unit**
- **Cold climate package rated for - 40° C**
- **Two width options (8.5' and 9.5')**
- **Two length options (Range II and Range III)**



ABOUT US

North Rig is the premier specialist in custom hydraulic catwalks. Our equipment is built at our own facilities in Canada.

CONTACT US

Phone: +1.403.851.9111
Email: ask@northrig.com
Web: www.northrig.com

NORTH RIG CATWALK TECHNOLOGIES LTD.
Box 1396
244 River Avenue
Cochrane, AB T4C 1B4
CANADA



North Rig's production facility in Alberta, Canada