

# High Temperature Deep Cycle GEL Battery

# VTG6-250

The Valiant VTG series deep cycle Gel battery uses an advanced nano gel electrolyte with Super-C additive and heavy-duty plate design to provide longer service life in deep cycle applications. The VTG series provides optimum and reliable service under extreme temperatures and frequent power failures making it highly suited for outdoor applications such as off-grid solar systems, RV, and telecom/UPS systems.

<b>6V</b> Voltage	<b>250Ah</b> Capacity	<b>Gel</b> Technology	<b>Deep</b> Cycle
----------------------	--------------------------	--------------------------	----------------------



**COMPLIED STANDARDS**

IEC 60896-21/22	JIS C8704
IEC61427	BS6290 part4
GB/T 19638	CE/ISO

**GENERAL FEATURES**



- Operating range of -40 to +60C
- Deep discharge recovery, 1600 cycles @ 50%DOD
- 2-3 year full warranty in most applications
- Longer life and greater stability in extreme temperatures

**APPLICATIONS**

- Off-grid solar systems
- RV
- UPS /Telecom
- Floor scrubber
- Wheel chair, Golf cart

**DIMENSIONS & WEIGHT**

Length(mm)/inches	260±1/10.24
Width(mm)/inches	180±1/7.09
Height(mm)/inches	265±1/10.44
TotalHeight(mm)/inches	272±1/10.71
Weight(kg)/lbs	34.7±3%/76.5

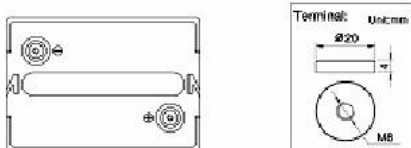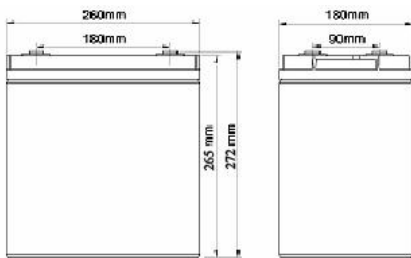

**TECHNICAL SPECIFICATIONS**

Nominal Voltage		6V (3 cells per unit)
Design Floating Life @25°C		20 Years
Nominal Capacity @25°C(20 hour rate@12.50A, 5.4V)		250Ah
Capacity @25°C	10hour rate (22.5A,10.8V)	225Ah
	5 hour rate (39.8A,10.5V)	199Ah
	1 hour rate (138.9A,9.6V)	138.9Ah
Internal Resistance	Full Charged Battery@25 °C	≤2.5mΩ
Ambient Temperature	Discharge	-25°C~60°C
	Charge	-25°C~60°C
	Storage	-25°C~60°C
Max.Discharge Current@25°C		750A(5s)
Capacity affected by Temperature (10 hour )	40°C	108%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 50A Voltage 6.8-6.9V
	Cycle Use	Initial Charging Current Less than 50A Voltage 7.2-7.45V

**BATTERY DISCHARGE TABEL**

**Discharge Constant Current per Cell (Amperes at 25°C)**

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	321.8	204.9	151.3	138.9	88.1	61.9	42.1	27.8	24.8	13.50	3.00
1.65V	315.9	201.2	148.5	136.4	86.5	60.8	41.3	27.3	24.3	13.25	2.94
1.70V	310.1	197.4	145.8	133.8	84.9	59.6	40.5	26.8	23.9	13.00	2.89
1.75V	304.2	193.7	143.0	131.3	83.3	58.5	39.8	26.3	23.4	12.75	2.83
1.80V	292.5	186.3	137.5	126.3	80.1	56.3	38.3	25.3	22.5	12.50	2.78

**Discharge Constant Power per Cell (Watts at 25°C)**







F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	619.4	394.4	291.2	267.3	169.7	119.1	81.0	53.5	47.6	26.0	5.77
1.65V	608.1	387.2	285.9	262.5	166.6	116.9	79.5	52.5	46.8	25.5	5.66
1.70V	596.8	380.0	280.6	257.6	163.5	114.8	78.0	51.5	45.9	25.0	5.56
1.75V	585.6	372.9	275.3	252.8	160.4	112.6	76.6	50.6	45.0	24.5	5.45
1.80V	563.1	358.5	264.7	243.0	154.2	108.3	73.6	48.6	43.3	24.1	5.34

The above data is based on average values and can typically be achieved within 3 charge/discharge cycles. Battery designs and specifications are subject to change without notice. Contact Valiant for the latest information.

# High Temperature Deep Cycle GEL Battery

# VTG6-250

## PERFORMANCE CHARACTERISTICS

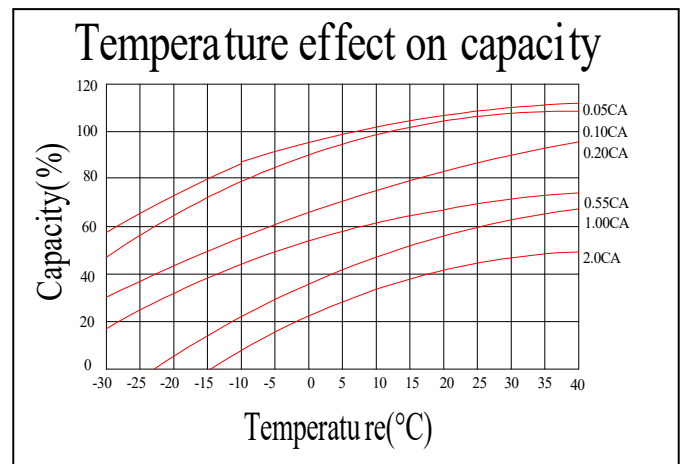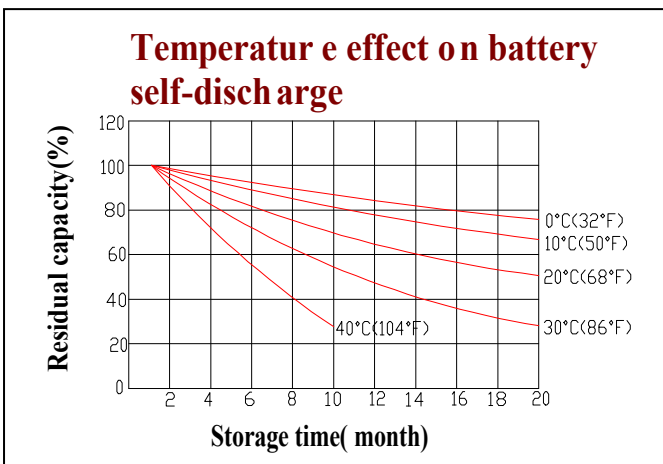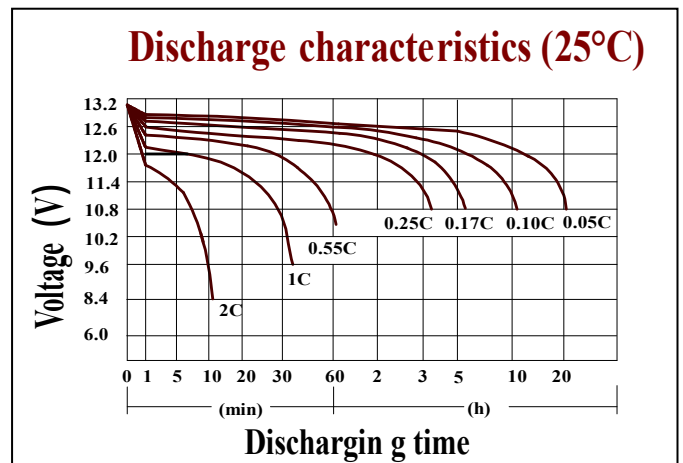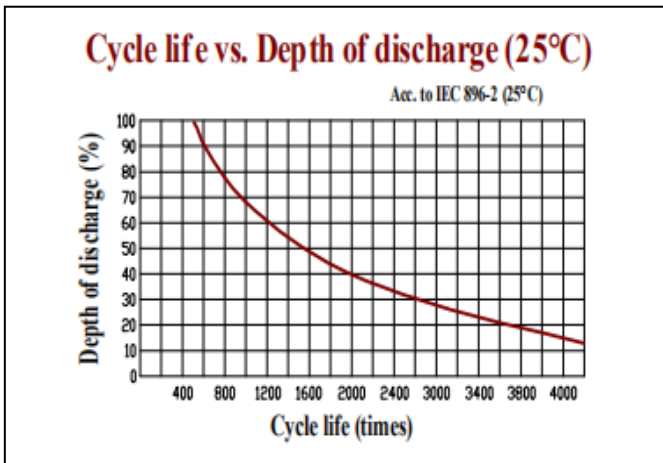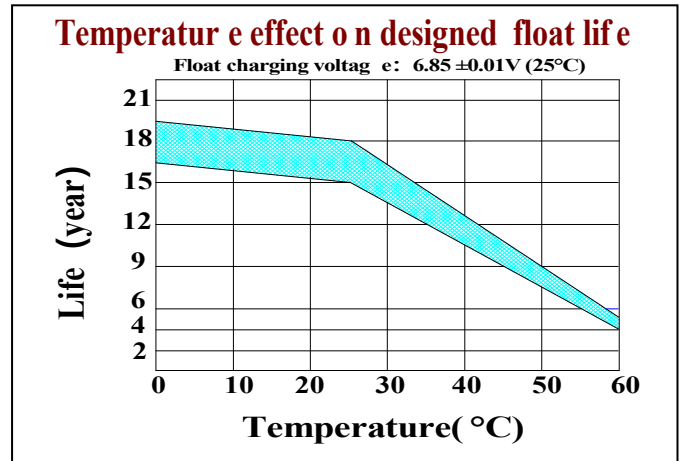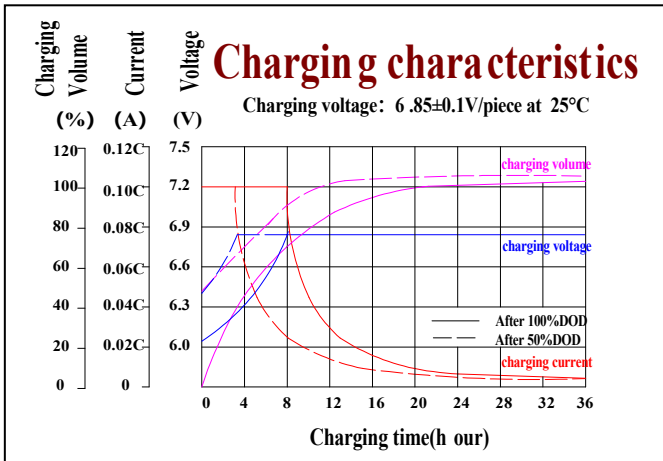

## BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistance ABS (UL94-V0 optional)	Flame Si-Rubber and aging resistance	Female Copper Insert M8	Advanced PVC /AGM separator for high pressure cell design	Silicon Gel	Two layers epoxy resin seal