



GSERIES
GAS FIREPLACES





G39 Gas Fireplace – Brick Liner, Traditional Log Set, Painted Surround



G39 Gas Fireplace – Black Enameled Liner, Traditional Log Set, Powder Coated Silver Surround



G39 Gas Fireplace – Ledgestone Liner, Traditional Log Set, Powder Coated Grey Surround

Design Features

- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look — No Louvers
- Millivolt / IPI
- Glass Size: 26¼" x 32½", 853¼ in²
- E-Coated Glass (Optional Ceramic Glass)
- Cool Surface System HDK Included
- 130 CFM Room Fan (with variable control)
- Run-Quiet Fan System
- Limited Lifetime Warranty



Available Options

- **Burner Options:**
 - Traditional Log Set
 - Birch Log Set
 - Driftwood Log Set
 - Glass Burner with Diamond Glass
- **Liner Options:**
 - Ceramic Brick Liner (Brown or Black)
 - Herringbone Liner
 - Ledgestone Liner
 - Black Enameled Steel Liner
 - Painted Steel Liner (Included)
- **Surround Options:**
 - Slim Face in Painted Black (incl.), Powder Coated Grey, Powder Coated Silver, Powder Coated Bronze, Brushed Nickel, and Brushed Antique Copper
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	30,000 BTU
BTU Minimum Output*	10,000 BTU
Heating Area	1,600 ft ²
P4 Efficiency	69.8%
Viewing Area	34½"h x 39"w
Glass Size	26½"h x 32½"w
Fireplace Install Dims.	HEIGHT 42" WIDTH 41½" DEPTH 18¼"

* Turn down = 50% Valve x P4 Efficiency



Traditional Log Set



Birch Log Set



Driftwood Log Set





G42 Gas Fireplace – Enameled Liner, Traditional Log Set, Painted Surround



G42 Gas Fireplace – Black Enameled Liner, Driftwood Log Set, Powder Coated Silver Surround



G42 Gas Fireplace – Herringbone Liner, Traditional Log Set, Painted Surround

Design Features

- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look — No Louvers
- Millivolt / IPI
- Glass Size: 29³/₈" x 36¹/₂", 1072 in²
- Ceramic Glass
- Cool Surface System HDK Included
- Run-Quiet Fan System
- Limited Lifetime Warranty



Available Options

- **Burner Options:**
 - Traditional Log Set
 - Birch Log Set
 - Driftwood Log Set
 - Glass Burner with Diamond Glass
- **Liner Options:**
 - Ceramic Brick Liner (Brown or Black)
 - Herringbone Liner
 - LedgeStone Liner
 - Black Enameled Steel Liner
 - Painted Steel Liner (Included)
- **Surround Options:**
 - Slim Face in Painted Black (incl.), Powder Coated Grey, Powder Coated Silver, Powder Coated Bronze, Brushed Nickel, and Brushed Antique Copper
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	40,000 BTU
BTU Minimum Output*	7,000 BTU
Heating Area	2,000 ft ²
P4 Efficiency	70%
Viewing Area	37 ¹ / ₄ "h x 42"w
Glass Size	29 ³ / ₈ " x 36 ¹ / ₂ "
Fireplace Install Dims.	HEIGHT 50" WIDTH 48 ³ / ₄ " DEPTH 23 ¹ / ₄ "

* Turn down = 50% Valve with Split Flow activated x P4 Efficiency



Top Firebox Lighting



Diamond Glass Burner



Traditional Log Set



Coming Late 2018



G50 Gas Fireplace – Black Enameled Liner, Traditional Log Set*, Painted Surround



G50 Gas Fireplace – Brown Brick Liner, Traditional Log Set*, Brushed Nickel Surround



G50 Gas Fireplace – Black Enameled Liner, Glass Burner, Powder Coated Silver Surround

Design Features

- Top Firebox Lighting (Log IPI Only)
- Adjustable Ember Bed Lighting (Log IPI Only)
- Clean Face Look — No Louvers
- Millivolt / IPI
- Glass Size: 30½" x 43½", 1326¾ in²
- Ceramic Glass
- Cool Surface System HDK Included
- Run-Quiet Fan System
- Limited Lifetime Warranty



Available Options

- **Burner Options:**
 - Traditional Log Set - **Appearance subject to change*
 - Birch Log Set
 - Driftwood Log Set
 - Glass Burner with Diamond
- **Liner Options:**
 - Ceramic Brick Liner (Brown or Black)
 - Herringbone Liner
 - LedgeStone Liner
 - Black Enameled Steel Liner
 - Painted Steel Liner (*Included*)
- **Surround Options:**
 - Slim Face in Painted Black (incl.), Powder Coated Grey, Powder Coated Silver, Powder Coated Bronze, Brushed Nickel, and Brushed Antique Copper
 - Forgeworks Face

Fireplace Specifications

BTU Maximum Input - NG	48,000 BTU
BTU Minimum Output*	8,700 BTU
Heating Area	2,200 ft ²
P4 Efficiency	73.6%
Viewing Area	39¼" h x 50" w
Glass Size	30½" h x 43½" w
Fireplace Install Dims.	HEIGHT 50" WIDTH 55" DEPTH 23¼"

* Turn down = 50% Valve with Split Flow activated x P4 Efficiency



Adjustable Ember Bed Lighting



Glass Burner



Traditional Log Set*


G Series Faces




SLIM FACE (G42 pictured with a Painted Black Finish)
Available for the G39, G42, and G50



FORGEWORKS FACE (G42 pictured)
Available for the G39, G42, and G50



Painted Black



Powder Coated Grey




Powder Coated Silver



Powder Coated Bronze



Brushed Nickel




Brushed Antique Copper




Midnight Bronze

Design Elements

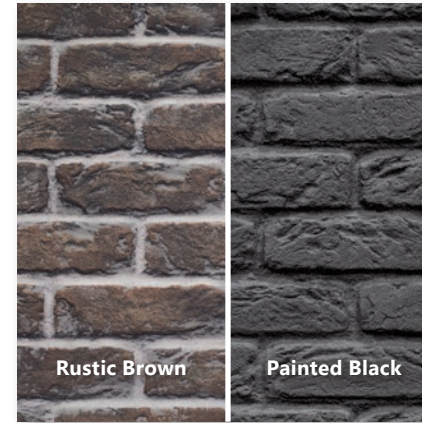

CERAMIC BRICK LINER

Available for the G39, G42, and G50

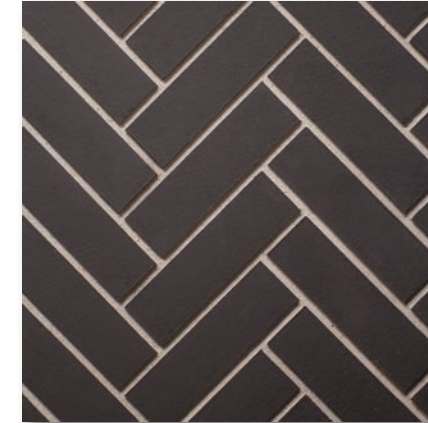


HERRINGBONE LINER

Available for the G39, G42, and G50



LEDGESTONE LINER

Available for the G39, G42, and G50

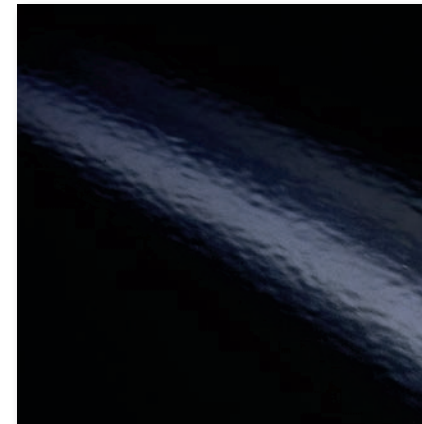

BLACK ENAMELED STEEL LINER

Available for the G39, G42, and G50



PAINTED STEEL LINER

Included with the G39, G42, and G50



GLASS BURNER WITH DIAMOND GLASS

Available for the G39, G42, and G50



DRIFTWOOD LOG SET

Available for the G39, G42, and G50



TRADITIONAL LOG SET

Available for the G39, G42, and G50



BIRCH LOG SET

Available for the G39, G42, and G50

Unit Specifications

Performance


	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
BTU Maximum input - NG / LP	30,000 / 30,000	40,000 / 40,000	48,000 / 48,000
Turn Down* - Valve 820 / Valve 885	50% / 33%	50% / 67.5% w/Split flow	50% / 67.5% w/Split flow
Heat Exchanger	✓	✓	✓
SIT Valve 820 (Standing Pilot)	Available	Available	Available
SIT Valve 885 (IPI)	Available	Available	Available
Split Flow Burner	N/A	Included (IPI Only)	Included (IPI Only)
Efficiency - Steady State**	71.37%	72%	75.7%
Efficiency - FE rating (P4)‡	69.8%	70%	73.6%
Glass Size	26¼" x 32½", 853¼ in²	29⅜" x 36½", 1072 in²	30½" x 43½", 1326¾ in²
Run-Quiet Fan System	130 CFM	130 CFM	130 CFM

Installation

	G39 GAS FIREPLACE			G42 GAS FIREPLACE			G50 GAS FIREPLACE		
Fireplace Dimensions w/Screen (HWD)	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH
Fireplace Dimensions w/Screen (HWD)	42"	41 ½"	18 ¼"	50"	48 ¾"	23 ¼"	50"	55"	23 ¼"
Venting Collar Size	4/7" Flex x 6 5/8" Rigid			5/8" Flex & Rigid			5/8" Flex & Rigid		
Venting Orientation	Top			Top			Top		
LP Conversion Kit (Standing Pilot)	Included			Included			Included		
Weight (lbs)	192 lbs			250 lbs			280 lbs		

Clearance to Combustibles

	G39	G42	G50
A - Side of unit to side wall	7"	7"	7"
B - Minimum clearance to ceiling	72"	78"	78"
C - Minimum clearance to mantle height	45"	45¼"	48"
D - Minimum clearance to mantle depth	4"	4"	4"
E - Front of door to edge of floor protection	0"	0"	0"
F - Minimum clearance to alcove width	52"	57"	63½"

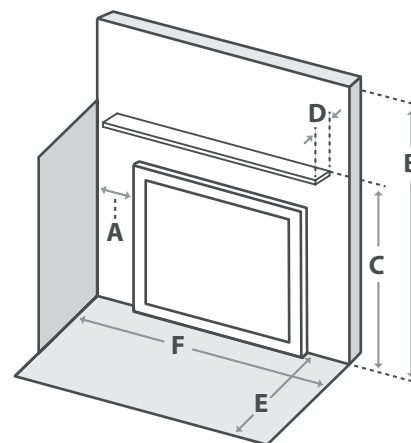

* Turn down based on AFUE efficiencies on low.

** Steady state rating based on conventional venting configuration.

‡ Efficiency based on the P4 measured efficiency rating of the IPI models

Available Options

Surround Panels

	G39 GAS FIREPLACE		G42 GAS FIREPLACE		G50 GAS FIREPLACE	
Surround Panel	HEIGHT	WIDTH	HEIGHT	WIDTH	HEIGHT	WIDTH
Slim Face Surround	33¾"	39"	37"	42½"	39"	50½"
Forgeworks Surround	33¾"	39"	37"	42½"	39"	50½"

Firebox Liners

	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
Ceramic Brick Liner	✓	✓	✓
Herringbone Liner	✓	✓	✓
Black Enameled Steel Liner	✓	✓	✓
Ledgestone Liner	✓	✓	✓
Painted Steel Liner	Included	Included	Included

Burner Variations

	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
Traditional Log Set Burner	✓	✓	✓
Birch Log Set Burner	✓	✓	✓
Driftwood Log Set	✓	✓	✓
Glass Burner with Diamond Glass	✓	✓	✓

Additional Accents

	G39 GAS FIREPLACE	G42 GAS FIREPLACE	G50 GAS FIREPLACE
Cool Surface System (HDK)	Buildt-in	Buildt-in	Buildt-in
Ceramic Glass	Optional	Standard	Standard
Top Firebox Lighting (Log IPI Only)	✓	✓	✓
Adjustable Ember Bed Lighting (Log IPI Only)	✓	✓	✓
Programmable Thermostat	✓	✓	✓
Proflame Remote Control	Included with IPI	Included with IPI	Included with IPI


Cool Surface System

INCLUDED WITH THE G SERIES

A Gas Fireplace with Peace of Mind.

We understand that surface temperatures are an important factor when considering how a fireplace will effect HDTVs or any framed decorations that might be mounted above. Heat rises naturally and with that in mind, every Enviro G Series Gas Fireplace comes equipped with our exclusive Cool Surface System.

We designed this system to help channel excess rising heat up behind the wall and safely push it through an included vent bezel bypassing any valuables above your G Series fireplace.

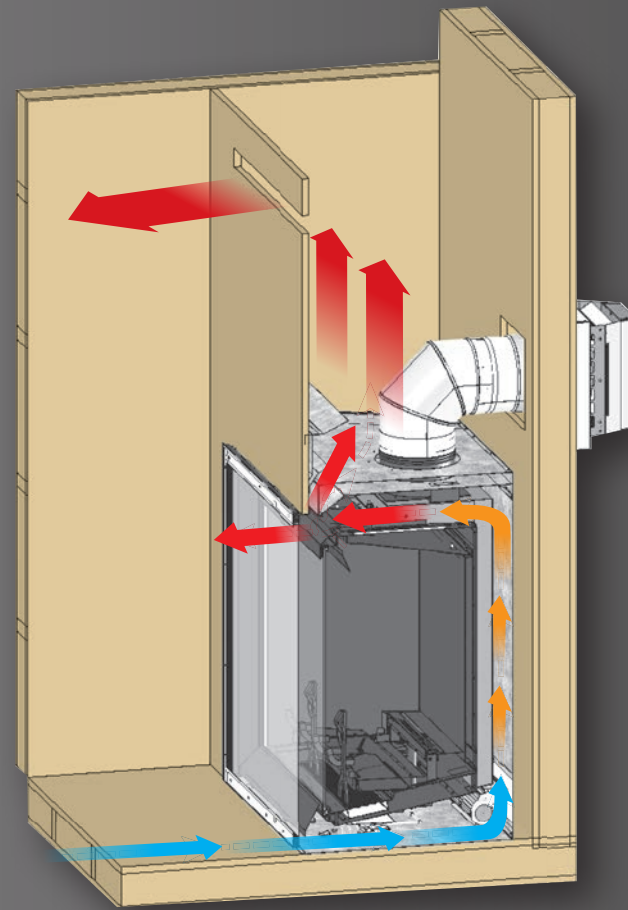


Convective heat that rises from the fireplace is captured in the chase and channeled through the vent using the Cool Surface System.

The Cool Surface System channels rising heat behind the wall.

Allows up to 1" thick combustible material (ie: drywall) to be used.

The Cool Surface System and vent bezel are included with every G Series unit.

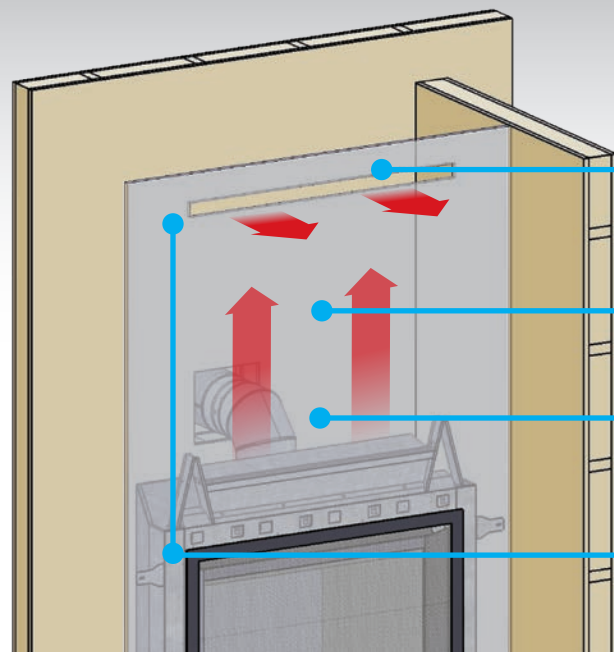

Rising heat is evenly vented forward into the living space through the included bezel

Rising heat is channeled safely past valuable wall mounted items such as a TV

Heat radiates forward from the fireplace window



The best way to visualize
your dream fireplace at home
is with the Enviro App!



Manufactured by Sherwood Industries Ltd • Victoria, BC, Canada
enviro.com • info@enviro.com • Printed in Canada, May 2018



Please share and
recycle this brochure