







Model FDV350N FDV350LP Fuel Natural Propane Input Max 37.000 BTU 35.000 BTU 29.000 BTU 27.000 BTU Input Min. FE (P.4.1-15) 66.63% 69.33%

Direct Vent Free Standing Stove; a Safe and Efficient Heating Appliance with the Convenience of Gas. Your best choice for installation anywhere throughout your home.

STANDARD FEATURES

- Millivolt Valve with Hi-Low heat and flame adjustment and allows operation during a power failure
- Dual burner system, with realistic flame pattern
- Heat radiating ceramic glass with panoramic view from three sides
- Mobile home approved
- Approved for installation in a bedroom or bed sitting room
- Black Louver
- Fibre Oak Log Set with Embers*

OPTIONAL FEATURES

Heat activated with variable speed control

Brick Refractory Liner

Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

Remote Control (Millivolt)

On/Off, Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating

B-Vent Adapter (Convert Stove to 4" B-Vent)



MINIMUM CLEARANCES TO COMBUSTIBLES

12" from side of unit

3" from back of unit

from side of unit in corner

ALCOVE INSTALLATION

30" depth (max.)


551/2" height (max.)

52½" width (max.)



DIMENSIONS AND SIZING

the side wall above the unit or straight up 191/16" 4" dia.

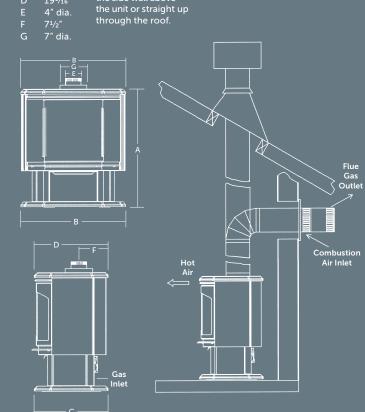



Safety Screen Barrier

> Canada ENER JUIDE

Look for the EnerGuide Gas Fireplace Energy Efficiency Rating in this brochure





