


# VALBY®

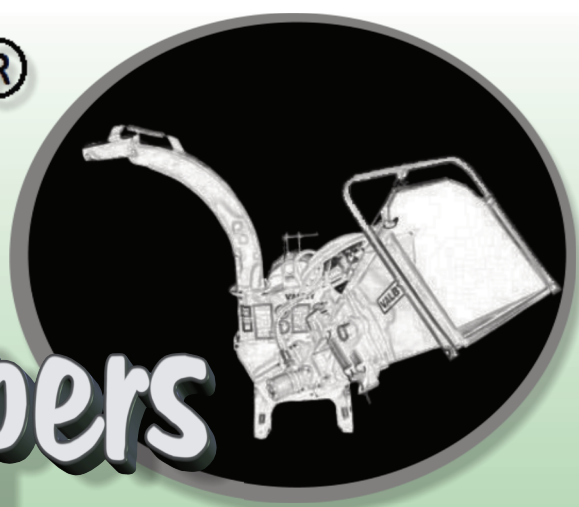


## Wood Chippers

Professional Quality and Manufacturing at Homeowner Prices

- Perfectly sized for farmers, woodlot owners & homeowners!
- Handle branches, tree tops and logs
- up to 6 in. (LC600) or 4 in. (LC400)
- HD 2:1 Belt Drive Transmission for fast disc speed.
- Tremendous air volume with virtually no plugging.
  - Uniform 1/2 chip
- 30-60 hp tractors (LC600)
- 20-40 hp tractors (LC400)
- Runs on 540 or 1,000 rpm PTO
- Both models available with gravity or hydraulic feed.
- Heavy Disk Creates Inertia
- Angled Feed increases pull from Knives
- Unlimited chute rotation



LC400HF

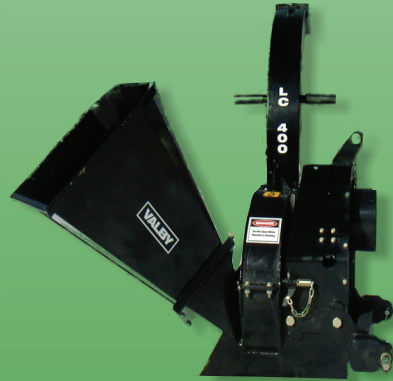

LC400F



LC600HF


### Benefits & Features

#### Industrial quality Spherical Roller Bearings


Valby Chipper's are durable enough to be run at 1,000 rpm without wearing out or coming out of alignment.

Belt drive transmission  
2.1:1 ramps up disk speed  
(LC400-600)

Higher air speed/Volume prevents chipper from plugging and throws chips farther.

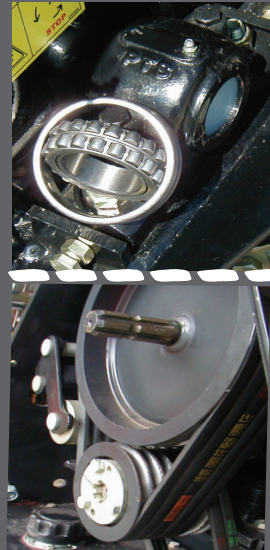

# Benefits & Features

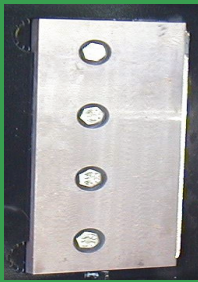

2 knives on disk  
Chromium steel knife blades  
knives sit in a solid metal  
pocket on the disk, so the bolts don't  
carry the load and break. Double edged  
knives need new bolts  
because of the abuse they take.



Heavy cutting disk with thick steel ribs  
creates inertia, high air speed and high  
air volume.


Requires lower  
power: expels chips  
further. Chute less  
likely to clog

# VALBY®

## Wood Chippers



LC900HF

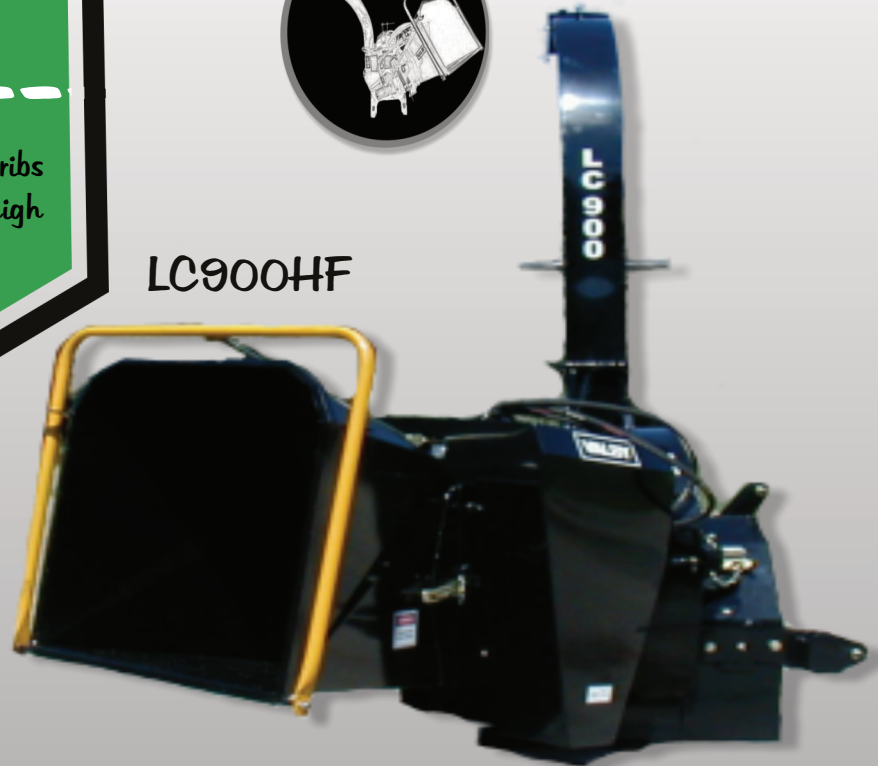

### Valby LC Series Landscaping and Bio-fuel Wood Chippers

Technical Information	LC400	LC600	LC900	Chipper Weight (lbs.)	LC400	LC600	LC900
Disk	Single	Single	Single	Manual Feed	630	800	n/a
Disk Diameter (in.)	24"	26"	41"	Hydraulic Feed	900	1200	1700
Disk Weight (lbs.)	150	220	350	Knives - Number	2		
Disk Speed (rpm)	1080/2000	1080/2000	540/1000	Knives - Cutting Edge	Single		
Output (cu. yd/hr)	10-20	17-26	17-40	Bearings	Spherical Roller Bearings		
Chip Size (in.)	1/2	1/2	11/16	Anvils	2 Adjustable		
Capacity (in.)	4"	6"	9"	Power Source	Tractor Power Take-off		
Power Requirement	20-40	30-60	55-100	Linkage	Three Point Hitch		
Drive	Belt Trans.	Belt Trans.	Direct	PTO Input Speed	540 or 1000		
Feed Options	Self/Hyd.	Self/Hyd.	Hyd.	Discharge Rotation	Unlimited Rotation		
Hyd. Feed Roller's	Single	Single	Double	Warranty	Two Year Parts & Manufacturing		



Northeast  
Implement Inc.

Northeast Implement Inc.  
460 Halsey Valley Rd. Spencer, NY 14883

[www.northeastimplement.com](http://www.northeastimplement.com)

888-589-6160