





FM-24K-600CT
 FINEMET® NANOCRYSTALLINE Core Input /output Transformer

Audio Feast

Wiring Connection

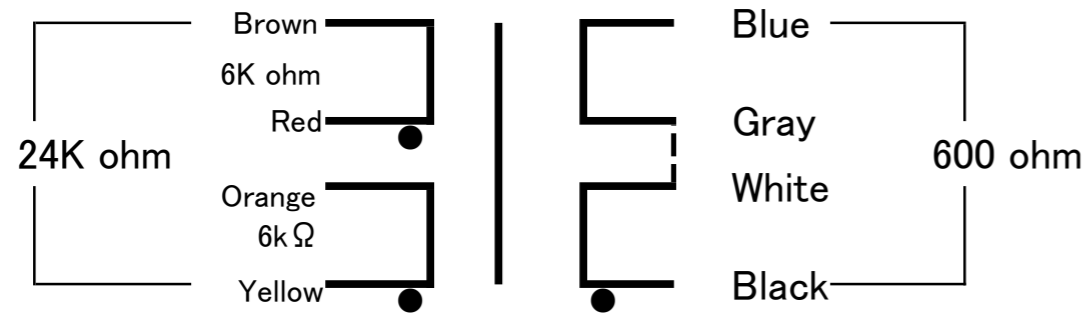

Ratio 1:0.159
 Freq. Response 5-80KHz(-3dB input 0.75V) Max. Output Voltage 20V (15Hz)
 Pri. Inductance 50H (40Hz)
 Pri. DCR Brown - Red(307 ohm)/Orange - Yellow(307 ohm)
 Sec. DCR Blue - Gray (10.5 ohm) White - Black (10.5 ohm)
 Pri. max. DC Current SET 24K ohm @DC18mA SET 6K ohm @DC36mA, PP 24K ohm @DC160mA
 Dimension 63x63x100(H) Black hammered metal case, or Urushi finish

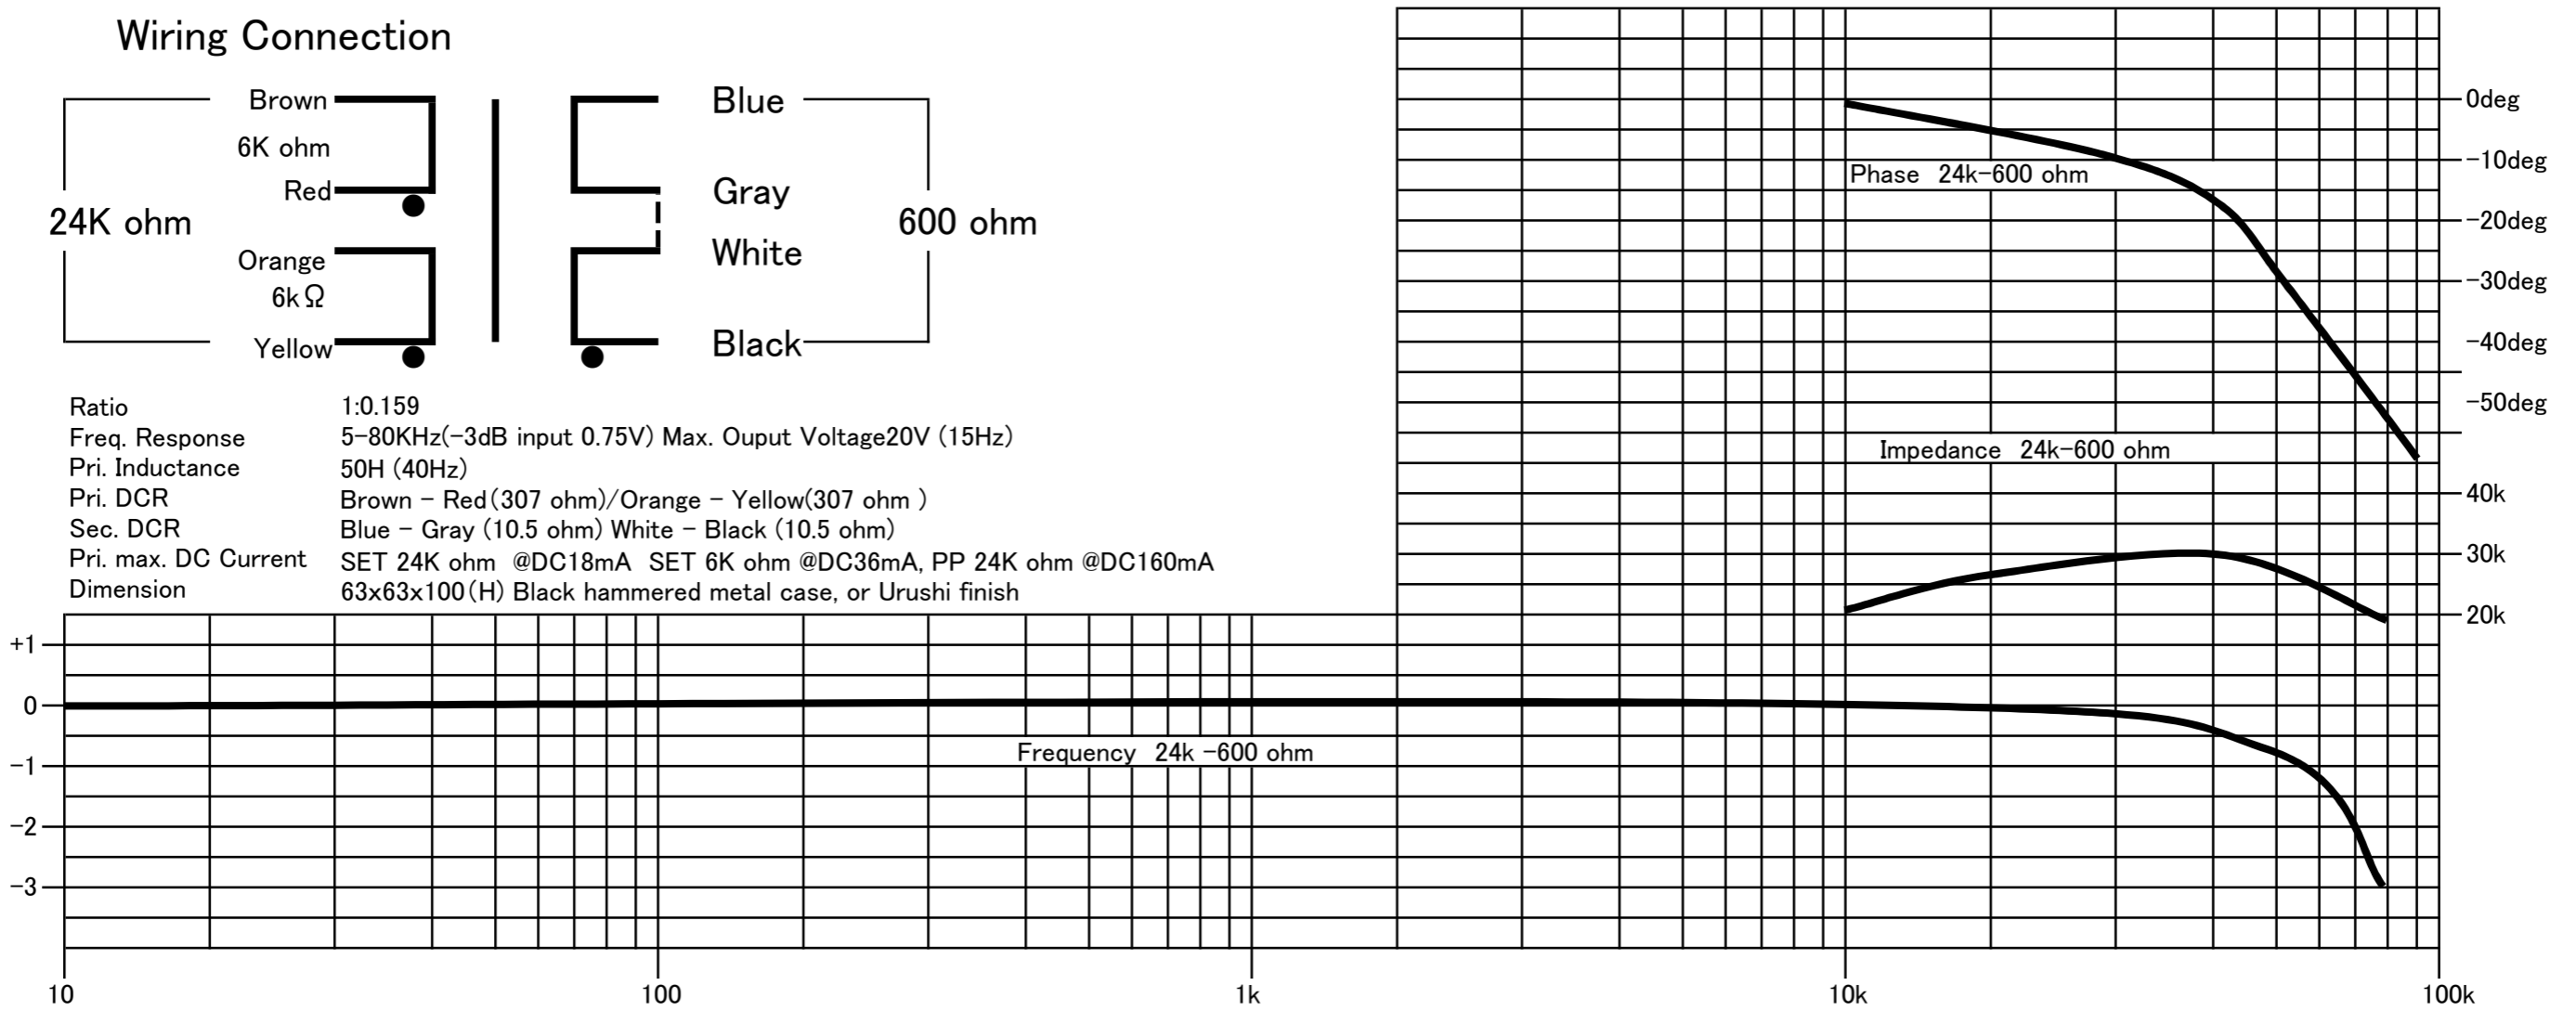

Secondary can be used open, but recommended load resistance is 24K ohm (600 series), 6K ohm (150 parallel)

Email: CleanUnderwear@gmail.com
 Web: TheAudioFeast.com
 Distributed by Audio Feast (Nashville, TN, USA)
 Final finish by Teramoto (Myoko, Japan)
 Designed by General Ind. (Saitama, Japan)