



# Ultraleather® | Pro



Ink and denim resistant • EPA-registered antimicrobial protection




Ink & Stain Resist




Antimicrobial

# Ultraleather® | Pro

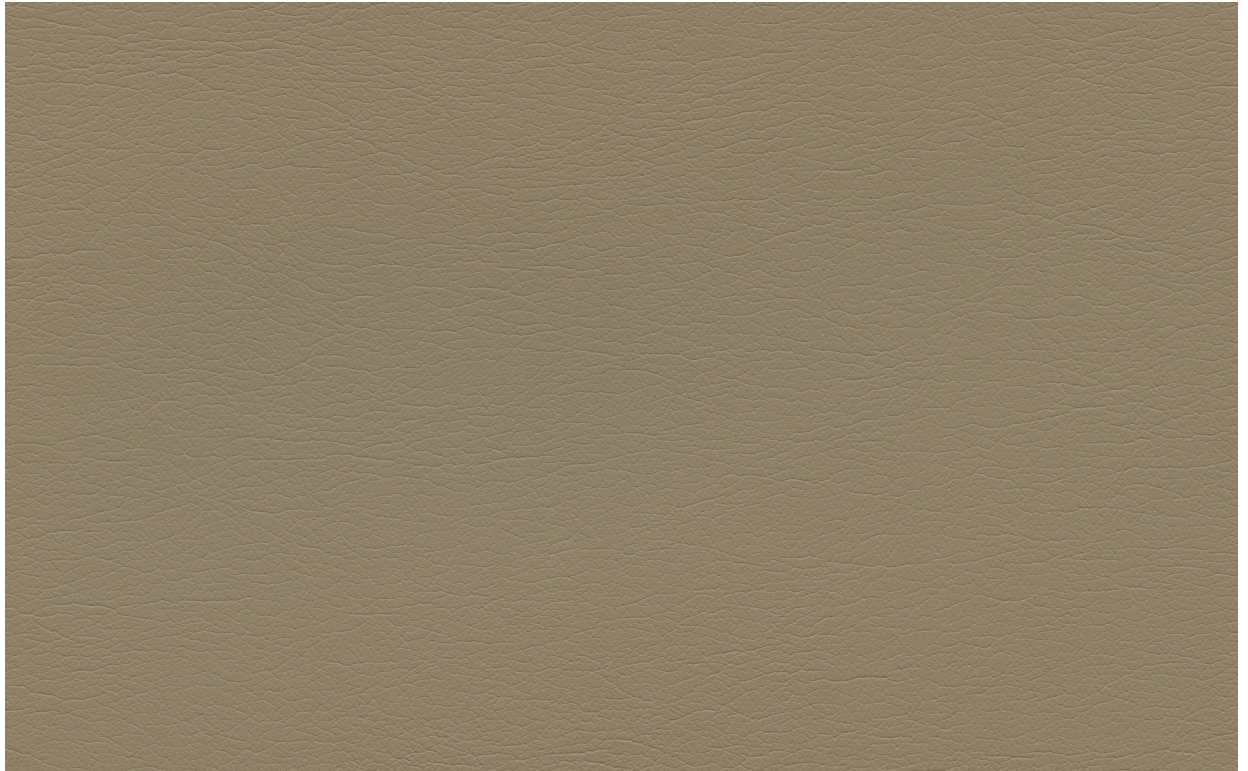

554-3894 Hazelwood




554-0008 White Wash



554-3412 Salt



554-6547 Dawn Grey



554-5648 Cloud



554-3353 Tundra



554-3352 Shore



554-6566 Moon Glow



554-5733 Mortar



554-5626 Char



554-5618 Dark Knight



554-3376 Dark Chocolate




554-3811 Swan



554-8251 Melon



554-5649 Ember



554-2661 Blue Bird



554-4315 Agave




554-3803 Parfait



554-8254 Rosy Coral



554-3087 Woodcres



554-2522 Capri



554-4530 Coastal




554-3595 Cork



554-8229 Campfire



554-7200 Blush




554-2530 Sky




554-4333 Arugula




554-3444 Toasted Bagel



554-1329 Rhubarb



554-9441 Mauve




554-2711 Blueberry




554-4424 Chino




554-3835 Raw Sienna




554-1357 Cranberry




554-9451 Azalea




554-2547 Sailor



554-4443 Laurel




554-3209 Cougar



554-3214 Chestnut



554-9336 Aubergine



554-2616 Oxford Blue



554-4534 Sherwood



Antimicrobial



Ink & Stain Resistant

# Ultraleather® | Pro

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
100% Reinforced Rayon Backing

### Weight:

Approx. 9.7 oz. Per Square Yard  
Approx. 330 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 500,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

**Adhesion of Coating:** ASTM D751

**Tear Strength:** ASTM D2261

**Breaking Strength:** ASTM D5034

**Tensile Strength:** BS EN ISO 1421

**Antimicrobial:** ASTM E2180

## Colorfastness

**Light Fastness:** AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

**Crocking:** AATCC 8, Grade 4-5 Wet & Dry

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- FAR Specifications
- IMO Part 8
- NFPA 701

## Ultraleather | Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim\*
- Red Wine

\* Removal of denim dye may vary depending on the period of time the stain sets in. While Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

