SAKURA D4

SETTING SHEET

☐ AWD ☐ RWD

DRIVER DATE / /

CIRCUIT DD / MM / YY


☐ Indoor ☐ Outdoor

Track ☐ Asphalt ☐ Carpet ☐ Other

Traction ☐ High ☐ Medium ☐ Low


Track Condition ☐ Flat ☐ Bumpy

FRONT

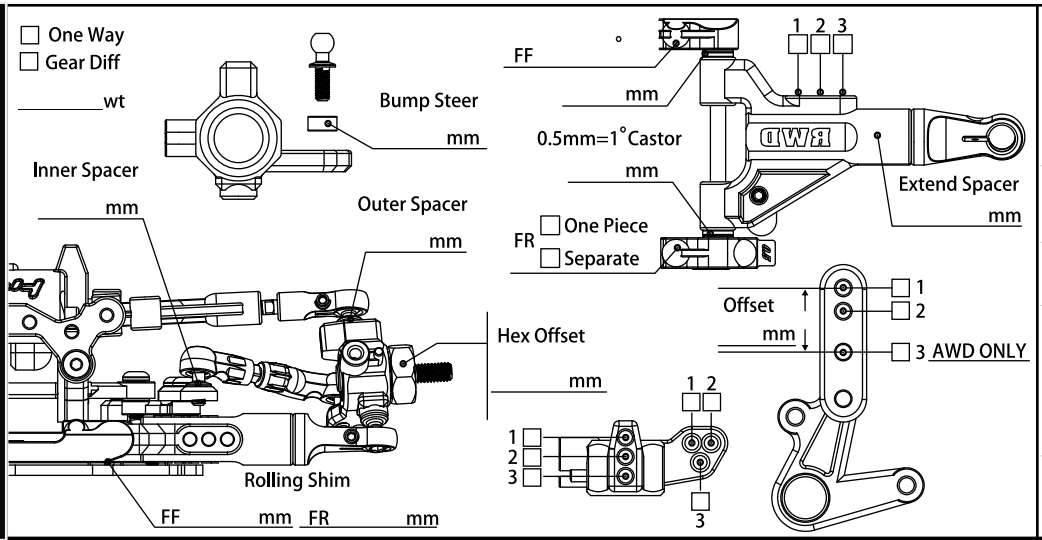

Ride Height	shock absorber
mm	Oil #
Camber Angle °	Piston 2 ☐ 3 ☐ 4 ☐ mm
Castor °	Bladder Foam Yes ☐ No ☐
Droop mm	Spring
Downstop mm	Notes
Toe Angle °	
Rebound %	

REAR

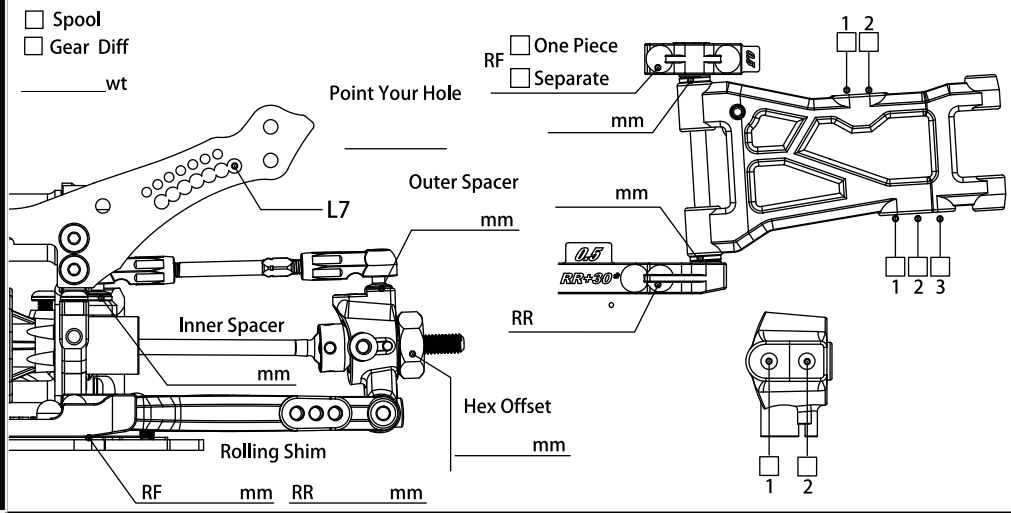

Ride Height	shock absorber
mm	Oil #
Camber Angle °	Piston 2 ☐ 3 ☐ 4 ☐ mm
Droop mm	Bladder Foam Yes ☐ No ☐
Downstop mm	Spring
Toe Angle °	Notes
Rebound %	

OTHER

Motor:

Spur Gear: T (/ Pitch)

Pinion: T (/ Pitch)

Wheel Offset: F mm

R mm

Tire:

Body:

Wing:


Battery:

ESC:

Notes:

BWD FDR ( ) = R. Pulley ( ) / R. Center Pulley ( ) X Spur Gear ( ) / Pinion ( )

REAR ☐ X GEAR RATIO ☐

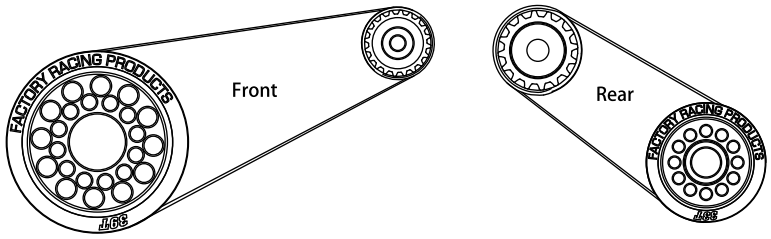

AWD FDR ( ) = F. Pulley ( ) / F. Center Pulley ( ) / R. Pulley ( ) / R. Center Pulley ( ) X Spur Gear ( ) / Pinion ( )

FRONT ☐ / REAR ☐ X GEAR RATIO ☐