FXX-D RTR

1/10 SCALE RC RWD HIGH PERFORMANCE DRIFT CAR

SETUP SHEET


ORIGINAL SETTING

DATE : _____ SURFACE : _____ NOTE : _____

TRACK : _____ GRIP : _____


Caster

■ 8°
□ 12°
□ 16°




Front wheel hubs

0 mm




Battery position options

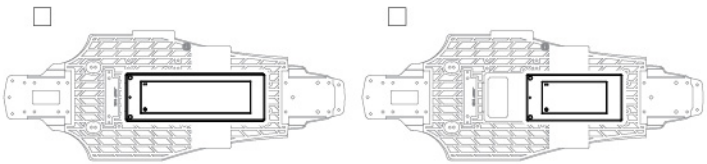

Rear wheel hubs

0 mm




FRONT / REAR

Tire: _____ Tire: _____


Wheel: _____ Wheel: _____

Offset: _____ Offset: _____




Front damper stay

□4 □3 ■2 □1

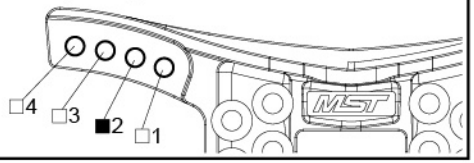


Front upright

0 mm 0 mm 0 mm

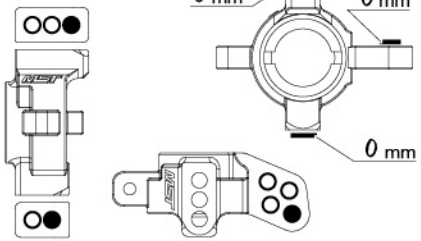


Rear upright




Rear damper stay


□4 □3 ■2 □1

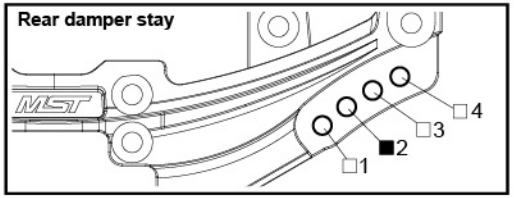


Rear diff



□ Gear diff
Diff oil _____




■ Spool
□ Ball diff.




□ Alum spool

Camber: -4°
Toe-in: 1°

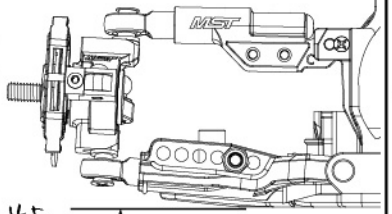

Ride height: 4.5 mm — GROUND


Suspension mount

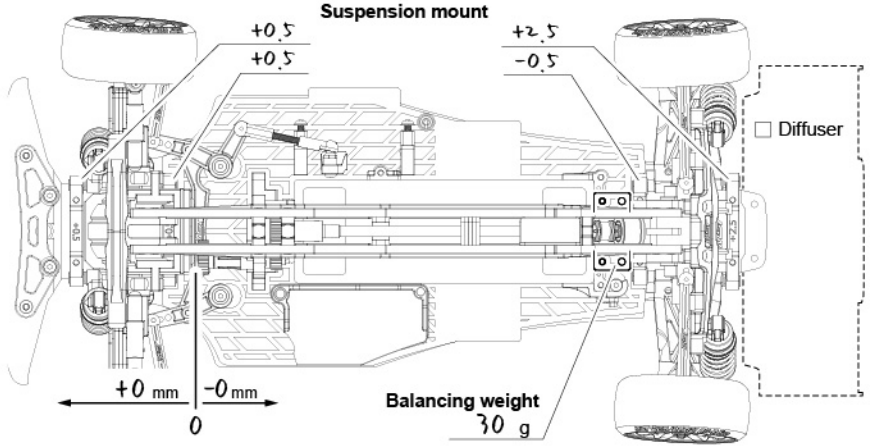

Motor Position: 0 mm

mm


Camber: -5°
Toe-in: -3°

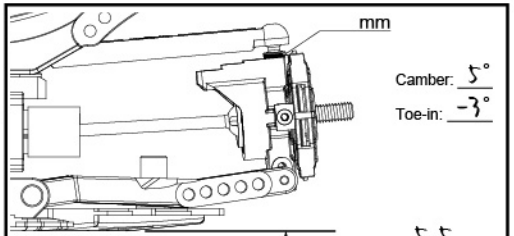

GROUND — Ride height: 5.5 mm


Front rollcenter

0 mm 0 mm

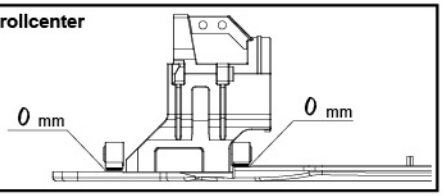


Rear rollcenter

0 mm 0 mm 0 mm

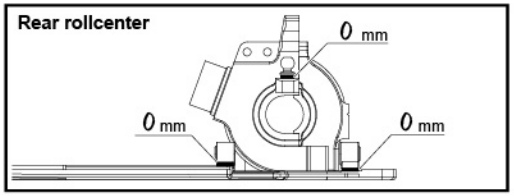


Front lower arm

□1 □2 □3 □4 □5 ■6




Rear lower arm

□1 □2 ■3 □4 □5



Front damper


Length

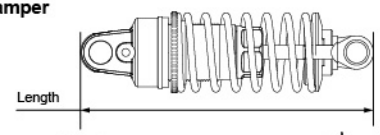

Shock oil: #150 Spring color: silver
Length: 63 mm Piston: Ø1.2 mm
Spring: 29 mm Ø1.4 Piston hole: 3

Rear damper

Length



Shock oil: #150 Spring color: Red
Length: 63 mm Piston: Ø1.2 mm
Spring: 29 mm Ø1.2 Piston hole: 3

Ballast:

_____
_____
_____
_____
_____
_____
_____

Gear A × Gear C × Big Bevel Gear ÷ Gear B ÷ Small Bevel Gear ÷ Pinion Gear = Gear ratio

28T × 36T × 36 T ÷ 20T ÷ 17 T ÷ ____ T = _____

Motor & ESC: _____ Battery: _____

FXX-D RTR


1/10 SCALE RC RWD HIGH PERFORMANCE DRIFT CAR

SETUP SHEET

DATE : _____ SURFACE : _____ NOTE : _____


TRACK : _____ GRIP : _____

Caster




☐ 8°
☐ 12°
☐ 16°

Front wheel hubs




Battery position options

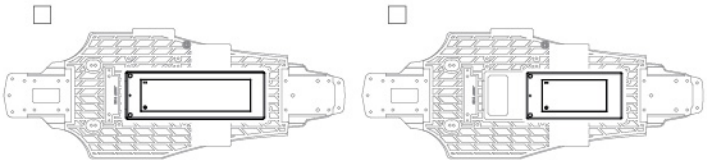

☐ ☐

Rear wheel hubs



FRONT / REAR




Tire:_____ Tire:_____


Wheel:_____ Wheel:_____

Offset:_____ Offset:_____


Front damper stay

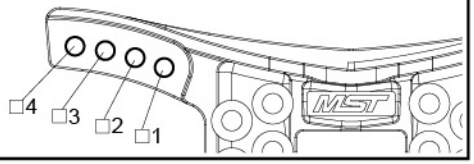


Front upright

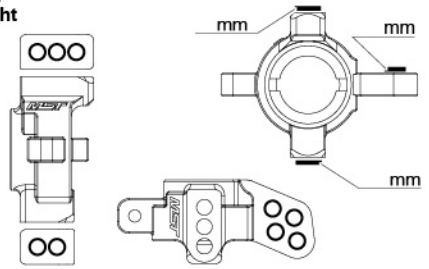


Rear upright




Rear damper stay

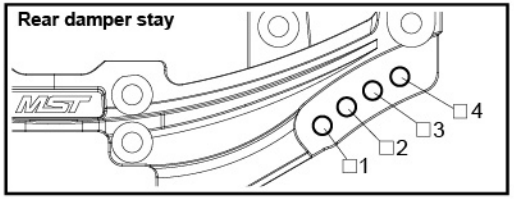


Rear diff




☐ Gear diff
Diff oil_____




☐ Spool
☐ Ball diff.




☐ Alum spool

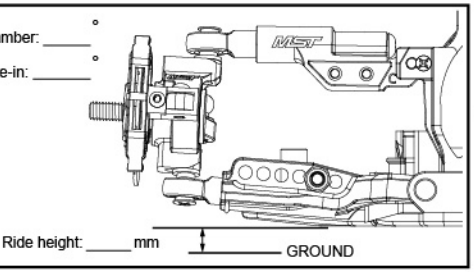

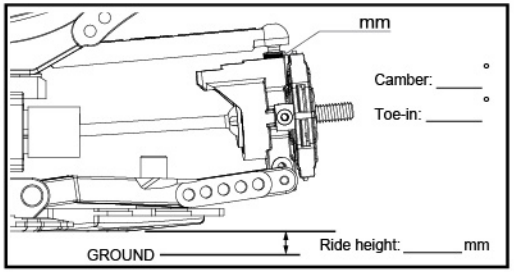


Suspension mount

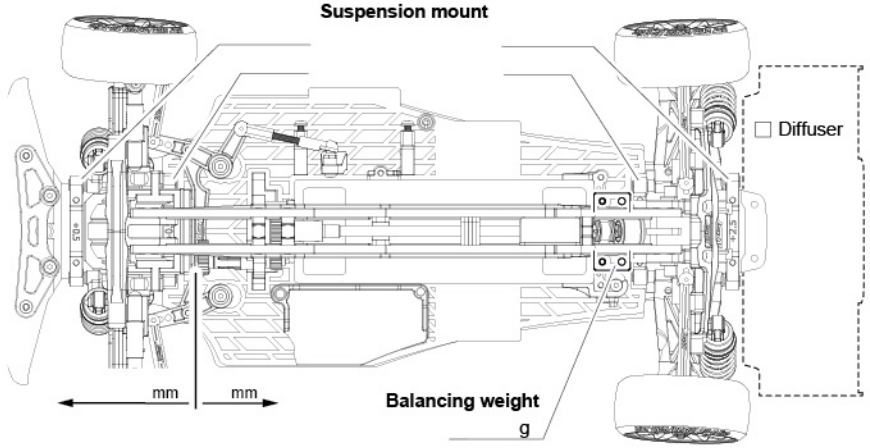


Motor Position:____mm

Front rollcenter

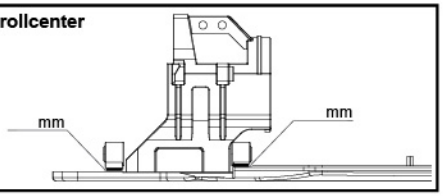


Rear rollcenter

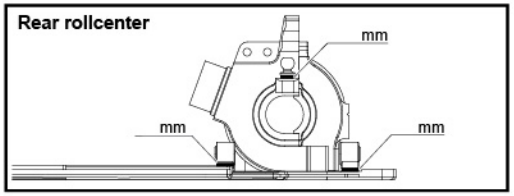


Front lower arm


☐1 ☐2 ☐3 ☐4 ☐5 ☐6



Rear lower arm



Front damper

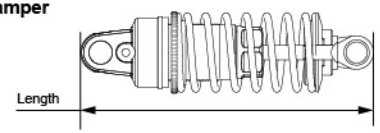


Shock oil:_____ Spring color:_____

Length:_____mm Piston:_____mm

Spring:_____mm _____ Piston hole:_____

Rear damper

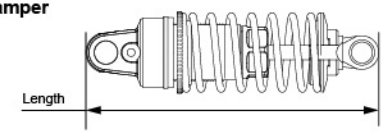

Shock oil:_____ Spring color:_____

Length:_____mm Piston:_____mm

Spring:_____mm _____ Piston hole:_____

Ballast:

_____

_____

_____

_____

_____

_____

_____

Gear A × Gear C × Big Bevel Gear ÷ Gear B ÷ Small Bevel Gear ÷ Pinion Gear = Gear ratio

28T × 36T × _____ **T ÷ 20T ÷** _____ **T ÷** _____ **T =** _____

Motor & ESC: _____ **Battery:** _____

026106