RRX-D VIP 2WD

1/10 SCALE RC 2WD HIGH PERFORMANCE DRIFT CAR

SETUP SHEET


ORIGINAL SETTING


DATE : _____ SURFACE : _____ NOTE : _____

TRACK : _____ GRIP : _____

Caster


☐ 18°
☐ 14°
■ 10°

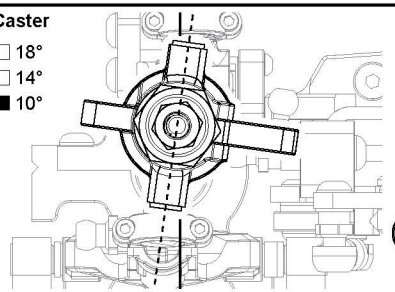

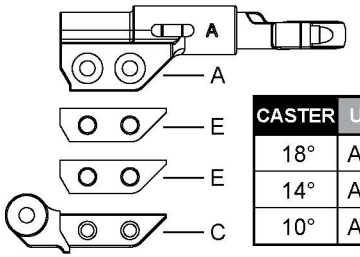


CASTER	UPPER ARM			
18°	A	E	E	C
14°	A	E		C
10°	A			C


Front wheel hubs



Steering rail



Rear wheel hubs




FRONT / REAR


Tire:_____ Tire:_____

Wheel:_____ Wheel:_____

Offset:_____ Offset:_____




Front damper stay

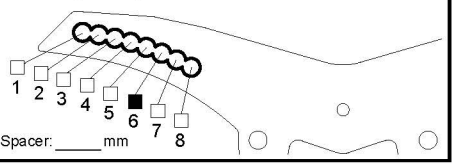

Spacer: ____ mm


Camber / Toe-in / Ride height

Camber: 6°
Toe-in: -1°

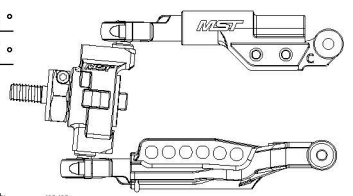


Ride height: ____ mm


Front rollcenter




Front upper arm




■ Front lower arm

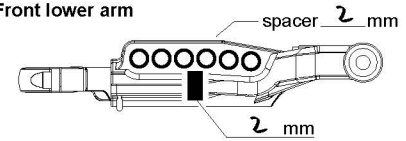


☐ Alu. front lower arm

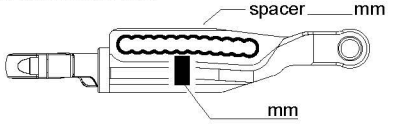


■ Front upright

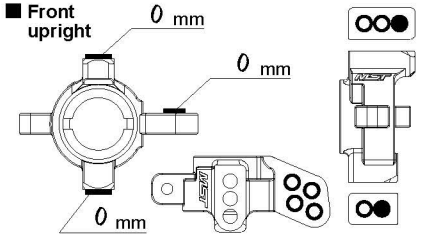


☐ Alum. front upright

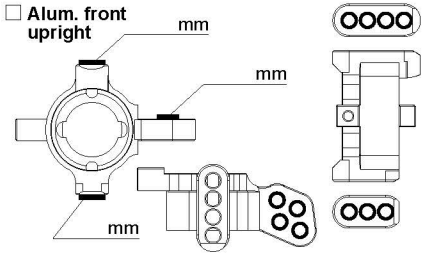


■ Rear upright




☐ Alum. rear upright




Standard battery

■



☐


Required for 210449

Short battery


☐


Required for 210449


☐


Required for 210449

Lower deck

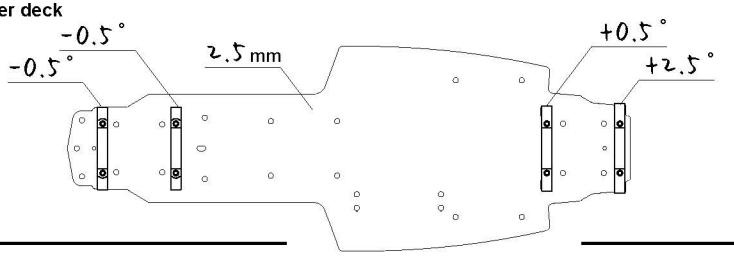


Rear damper stay

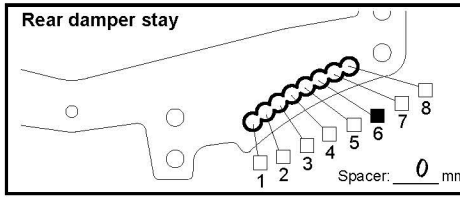

Spacer: 0 mm


Camber / Toe-in / Ride height

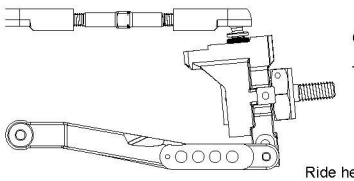

Camber: 4°
Toe-in: 3°


Ride height: 5 mm

Rear rollcenter

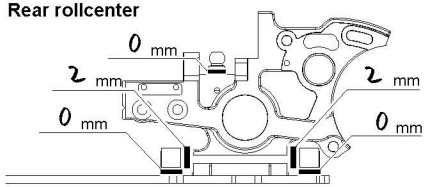


Rear lower arm


■


Alum. rear lower arm



spacer ____ mm




Rear diff.

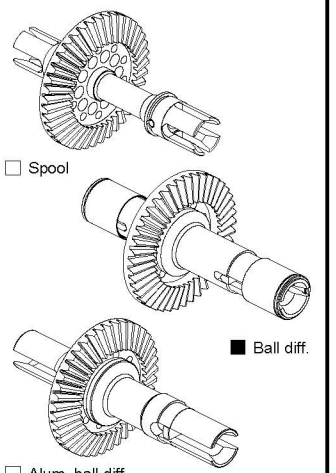


☐ Spool


■ Ball diff.

☐ Alum. ball diff.



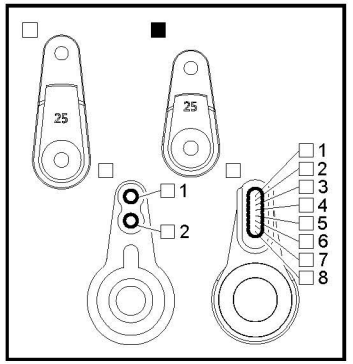

FRONT DAMPER




☐ Damper sponge

Damper seal type :
- ■ standard seal
- ☐ low pressure seal

Piston : 1.2 mm - 3 hole

Damper oil : 300 #

Cylinder pressure :
- ☐ positive
- ■ nagative




Spring : 29 mm - Soft series
Yellow


Spring retainer :
- ■ standard retainer
- ☐ alum. retainer (down type)

Total length [A] : 63 mm

Spring adjuster gap [B] : 3 mm

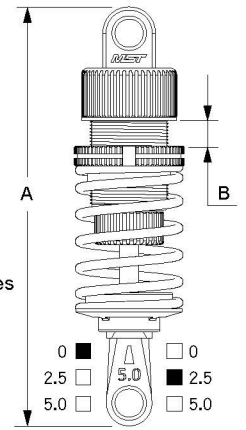

REAR DAMPER




☐ Damper sponge

Damper seal type :
- ■ standard seal
- ☐ low pressure seal

Piston : 1.2 mm - 3 hole

Damper oil : 300 #

Cylinder pressure :
- ☐ positive
- ■ nagative




Spring : 32 mm - Soft series
Purple-green

Spring retainer :
- ■ standard retainer
- ☐ alum. retainer (down type)

Total length [A] : 63 mm

Spring adjuster gap [B] : 2.0 mm

Upper deck strengthen post



GYRO location

_____

_____

_____

_____

Gear ratio & CS ratio

► FRIST REDUCE RATIO :
spur gear 74 T / pinion gear _____ T = _____

► FRONT DRIVE RATIO :
front pulley _____ T / front center pulley _____ T = _____

► REAR DRIVE RATIO (second reduce ratio) :
rear pulley 42 T / rear center pulley 11 T = 3.81


► FINAL DRIVE RATIO :
rear drive ratio 3.81 × first reduce ratio _____ = _____

► COUNTER STEER RATIO :
front drive ratio _____ / rear drive ratio _____ = _____


Front Balancing weights



☐ Alum. bumper support

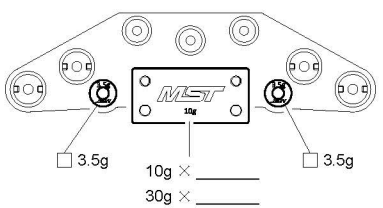


Stabilizer

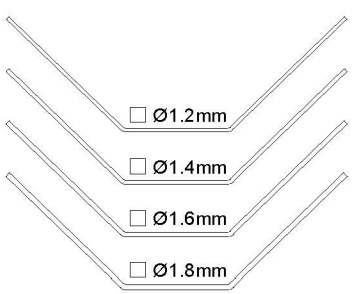


Rear Balancing weights

☐ Rear bumper



☐ Rear balancing diffuser

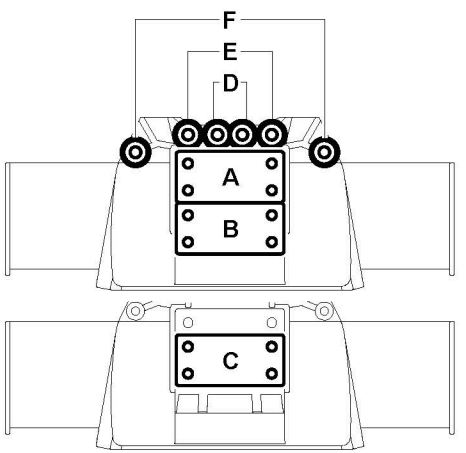

A _____ g

B _____ g


C _____ g

D _____ g

E _____ g

F _____ g

Turnbuckle length

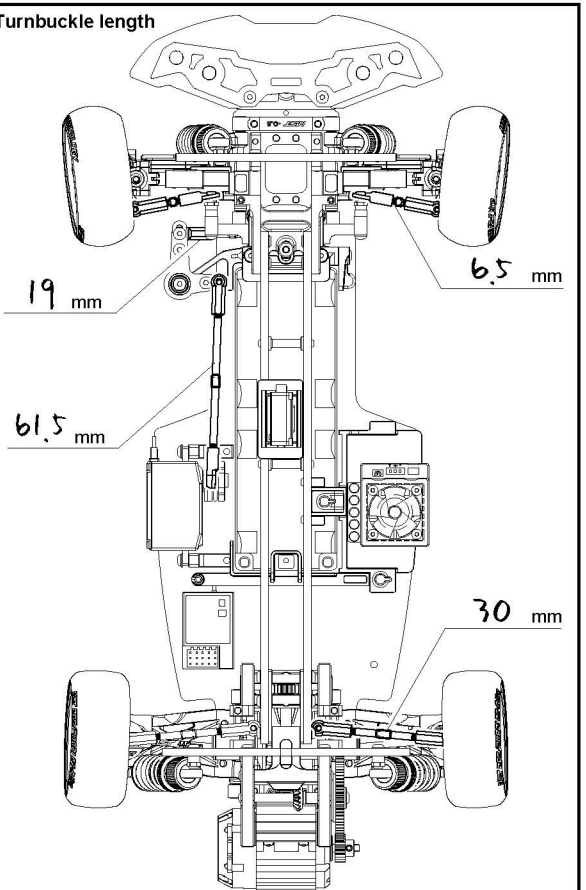

Electrics, Peripherials & Weights

MOTOR : _____ - _____ T - _____ g


ESC : _____ - _____ A - _____ g

BATTERY : _____ - _____ C - _____ g

TRANSMITTER : _____

RECEIVER : _____ - _____ g

BODY SHELL : _____ - _____ g

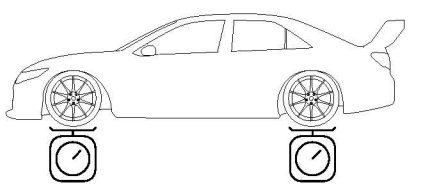

2WD AXLE WEIGHT

FRONT	REAR
☐ w/ shell _____ g	☐ w/ shell _____ g
☐ w/o shell _____ g	☐ w/o shell _____ g

TOTAL WEIGHT : _____ g

Ballast:

_____

_____

_____

_____